


## Features and Functions

1. Adjustable sensitivity of each detection zone
2. Multi-alarm sounds to choose
3. Operating frequency can be adjusted manually or automatically
4. Detection technology: Even detection technology, no blind spot
5. Working band: 50 working bands
6. Sensitivity of each detection zone:400 level
7. Security level: 100 level
8. Statistics: Record the pass and alarm numbers
9. Query function: The system has real-time information query function
10. Intelligent Standby: The system has intelligent standby operation alerts
11. Detection speed: more than 60 people pass and detect in 1 minute
12. Battery Backup (Optional)

## Advanced function

1. Computer network function: Can connect PC terminal that change specification of DFMD. Is check Real—Time type amount of walked-through people via computer(Optional)
2. Integrated 72 application occasions in the program, so can change all zones Sensitivity when you choose different occasion

## Dimensions

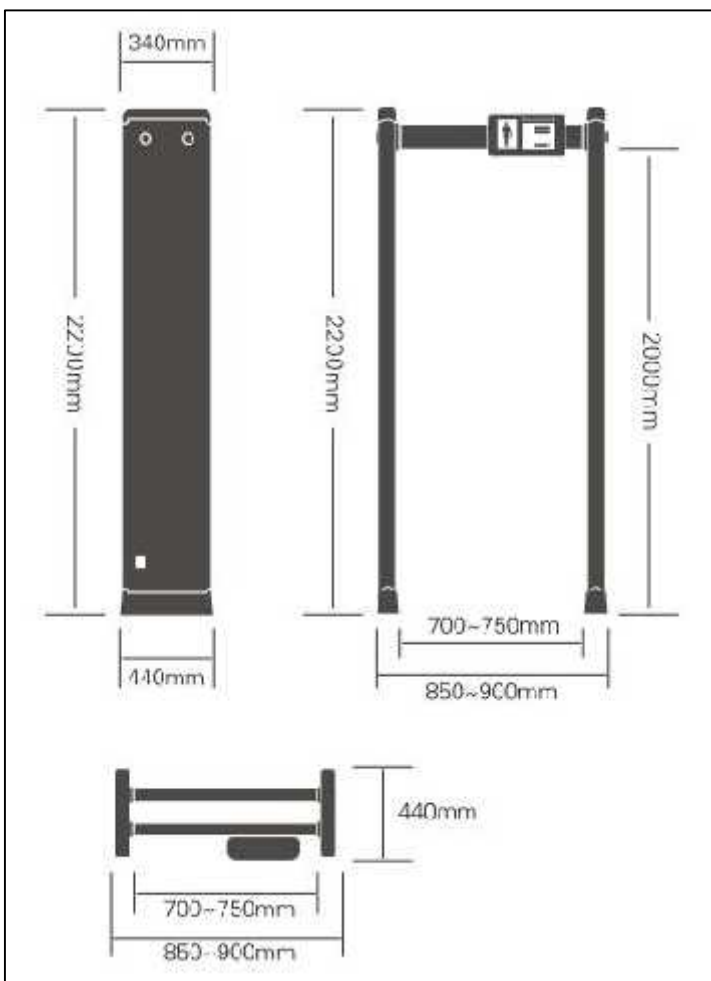

### Technical Parameters

Model Number	TT 306
Vertical dimension	2220x460x850mm
Vertical channel size	2000x700mm
Packing size	2270x650x240mm
Net weight of main Detection Door	40KG
Gross weight of main =Detection Door	48KG
Detection zones	6 zones
Working voltage	AC90V~240V50/60Hz
Power consumption	20W
Each zone sensitivity	1-400 Level
Security level	100 Level
Working frequency range	1-50bands
Working environment temperature	-20°C~65°C

### Advanced Functions and Features

Portable metal can be excluded	●
Dual high-brightness red LED display	●
Integrated four key panels operation	●
Multiple network ports	●
External control alarm device port	●
Secondary development port/ upgrade port	●
Count the number of people passing through	●
The function of counting Alarm times	●
Query the total number of historical memory	●
Multi zones detect and alarm at the same time	●
Smartpartitionfunctiontodetectlargeobjects	●
The super brightness SMD	●
Super brightness SMD double zones indicator	●
50 alternative operating frequencies	●
The alarm sound mute mode settings	●
Alarm sound size adjustable modes	●
In front of the bilateral zone alarm indicator	●
Before and after four zones alarm indicator	●
The sensitivity of each detecting zone is adjustable	●
Theadjustablesensitivityis1-400ofeachzone	●
Choosetheoverallafetylevelof1-20	●
12 independent probes, 6 interactive detecting zones	●