





Product Catalogue

Fire Alarm System

Safety > Fire Safety Solutions > Fire Alarm System

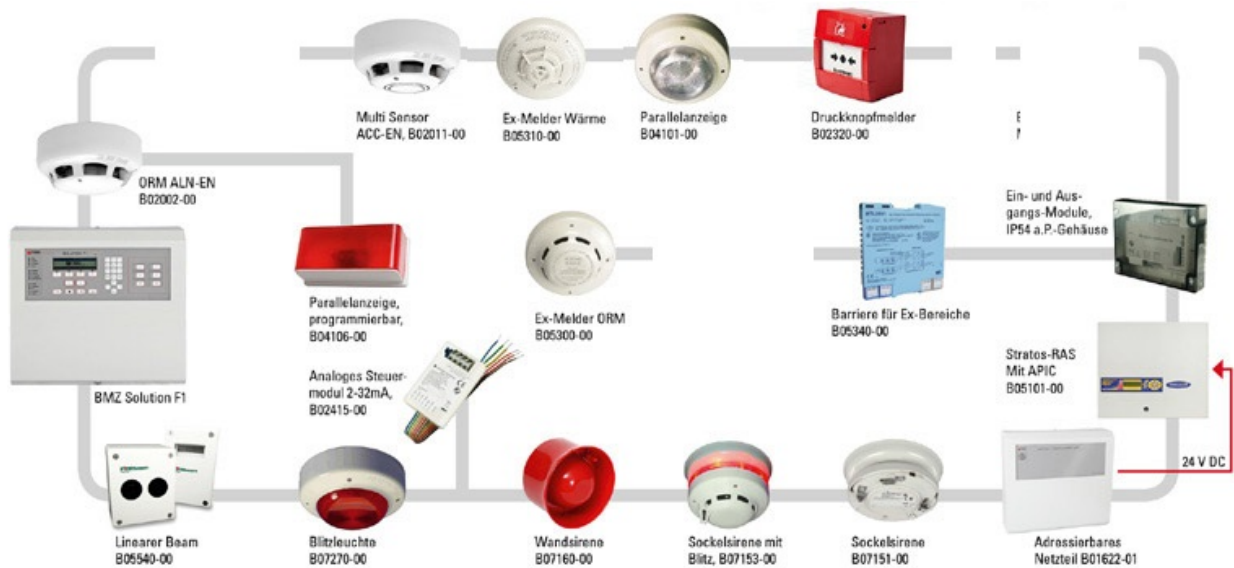

KT Automation Private Limited · D 32-33 Kamalanjali Commercial Complex,
Radhakrishna Crossing, Akota · 390020 Vadodara



Ref: KT107001001OP72

Optical Smoke Detector with Base Siemens OP720

Smoke detector consisting of:

- Point detector
- Detector dust cap to protect the point detector during the construction phase

Function:

- Functions according to the scattered light principle with one sensor, optical forward scattering
- Opto-electronic measuring chamber which obstructs disruptive extraneous light but provides excellent detection of smoke particles
- Selectable...



Scan product

Ref: KT107001001AG12

Fire Alarm System 12 Zone Agni

Features Of Agni Device 12 Zone Conventional Fire Alarm Panel

- Agni Device 12 Zone Conventional Fire Alarm Panel
- Complies to IS 2189:1999 & Tested by ERTL (N) & System Sensor
- 2 x 16 character Backlit LCD Display (4 x 20 Character, Optional)
- 64 / 128 / 256 Events Logging Facility With Real Time Clock & Keypad
- 2 Wire Communication facility via RS 485 Port
- BMS Attachmen...



Scan product



Ref: KT107001001TWL4

Tower Light 4 LED With SOUND

Tower Light With 4 LED +Sound

Voltage: 12 V Dc

Warranty:- 1 Year



Scan product

Ref: KT107001001ZDMC

Manual Call Point Bosch

FMC-210-DM Double Action Call Points

Mechanical blocking of locking mechanism after alarm triggering

Individual identification thanks to automatic or manual detector addressing

Indicator LED for alarm or for inspection Evaluation



Scan product



Ref: KT107001001ZDSO

Outdoor Siren Bosch

FNM-420-B-RD Sounder outdoor, red

Volume of up to 102.5 dB(A)

u Maximum current consumption of less than 4.05 mA

u Up to 75 sounders per LSN 0300 A loop and 100 per LSN 1500 A loop

u Immediate synchronization

u 32 different tone types can be selected (incl. DIN tone)



Scan product

Ref: KT107001002P994

P 9945A Loop Network Card GST

P-9945A Loop Network Card

Features

□ Two photoelectric isolation RS485 interfaces.

□ Suitable for ring network

P-9945A Loop Network Card



Com. Interface -Two RS485 interfaces

Com. Distance -The distance between two neighbor nodes is less than 1200m

Network Capacity Maximum 32 GST series control panels for networking

Transmission Medium 1.0 mm² or above twisted pair, shielded twisted pair is recommende...



Scan product



Ref: KT10800200MSIR

Wireless Signal Repeater Visonic

Model No. RP-600 PG2

PowerG two-way Frequency Hopping Spread Spectrum FHSS-TDMA technology -provides robustness and reliability close than ever to wired

- Extends the communication range between the PowerMaster systems and other PowerG transmitters
- Transmission range is by far greater than the industry standard
- Visible link quality indication shown on the device
- Mains po...



Visonic



Scan product

Ref: KT107001001ZWSC

Zone wise Sounder card

Zone wise Sounder card



Scan product



Ref: KT101001001P991

ProgrammerTool GST Addressable fire Alarm sensor

Programmer Tool.
GST Addressable fire Alarm sensor



Scan product

Ref: KT107001001AFSP

Addressable Photoelectric Smoke Detectors Notifier FSP951R

FSP/951R : heat detector Honeywell notifier WITH B-501 : base



SLC LOOP:

- Two-wire SLC loop connection:
- Unit uses base for wiring:
- Compatible with FlashScan and CLIP protocol systems:
- Stable communication technique with noise immunity:

ADDRESSING::

- Addressable by device:
 - Rotary, decimal addressing:
- (Refer to the NOTIFIER panel manuals for device capacity.):
Walk test...



Scan product



Ref: KT107001001MCPH

HONEYWELL MORLEY Red Add Call Point, Flush Mounting, Glass Honeywell

Digital Controller for Automatic Preuse. Dosage Error & Power adjustments with Hand switching and foot switch facility. With multi programmable power settings. Feather touch & Digital display for power settings.

Separate Feather touch generator for Bipolar with Auto Adjustment of output as per the impedance level & Three vessel sealing mode for rapid & instantaneous seal.

Body ...



Scan product

Ref: KT107001001MISO

Honeywell Morley Strobe Sounder MI WSO PR N

Morley IAS MI-WSO-PR-N Wall Mounted Red Sounder

BASE :B501AP

Material : ABS

Color :Red

Operating Temperature : -25 to +70 deg C

Shape : Round

Supply Voltage: 15 to 29VDC (Non-isolation) 15 to 29VDC (Isolation)

Standby Current: 120μA (Non-Isolation) 225μA (Isolation)

Max current consumption sounder and strobe: 14.5mA (High Volume Tone 11 @15V)

Max Sound Output 99 dB(A) +/-3dB ...



Scan product



Ref: KT107001001MWBR

Strobe With Buzzer Mini



Model : LTE-2071J

Siren type :

Strobe type : Red

Operating Voltage : 220AC

Dimensions : (L)270mm x (W)193mm x(H) 100mm

Recommended Battery : 12VDC, 1.3Ah rechargeable

Colour : White

Stand by Current : 8mA

Maximum Current : 1600mA@13.8VDC

Maximum Power : 1500(Peak)

Charge Current Limit : 250mA

Low Battery Level : 8VDC,+0.3VDC

Warranty:- 1 Year



Scan product

Ref: KT107001001R258

8 Zone Fire Alarm Control Panel Model 2558

Model : RE-2558

Make : Ravel

Supply of 8 zone fire alarm control panel ,with 16x2 character LCD Display

Complies with UL-864 AND NFPA-72, Standard .

Type :Conventional

Dimensions : (440W X 340H X 120D)

Color : Red / White

Construction : 18 Gauge (1.22mm) CRCA sheet with powder-coated Finish

IP Rating : IP50

Cable Entry : 11xø19mm Knockout in top of the cabinet

10xø22.25mm ...



Scan product



Ref: KT107001002TWLF

Electronic Hooter with Flasher



Sound Level (dB) 110db
 Power Source 24,110,230 VAC,DC
 Alarm Range 100 met
 Usage Electrical control panel,Electrical Switch gear,Safety
 Brand MIMIC
 Supply Voltage :- 18 vdc min. to 30 vdc,110v AC,230v ac
 Sound level :- 105dB
 Environmental rating :- IP50
 Maximum input response time On/Off :- 10 ms
 Oscillation Frequency :- 3kHz + 500 Hz LED or audible
 independently selected(option...



Scan product

Ref: KT10800200MC30

MC 302 PG2 PowerG Wireless Door, Window Contact



Battery type: 3V, CR-123 Lithium battery
 temperature:0°C to 49°C (32°F to 120°F)
 Operating environment:Indoor
 Dimensions: 81 x 34 x 25mm (3.19 x 1.25 x 1in)
 PowerG two-way Frequency Hopping Spread Spectrum FHSS-TDMA technology - provides robustness and reliability closer than ever to wired
 • Ideal for protecting doors and windows
 • Large transmission range enabling repeater-free...



Scan product



Ref: KT10800200WSIR

Wireless Signal Repeater

Supply Textel make Wireless Signal Repeater for Enhancing the Signal Strength with Adapter.
Model TSR.



Scan product



Ref: KT116017002WLSD

Wireless Sounder

Wireless Sounder
Make: Textel
Model no: WSS



Scan product



Ref: KT116017002WLS

Wireless Sounder

Wireless Sounder

Make: Textel

Model no: WSS



Scan product