



Product Catalogue

Addressable Fire Alarm System

Safety > Fire Safety Solutions > Fire Alarm System > Addressable Fire Alarm System



KT Automation Private Limited · D 32-33 Kamalanjali Commercial Complex,
Radhakrishna Crossing, Akota · 390020 Vadodara



Ref: KT10700100hSMDP

Smoke Detector Honeywell

Smoke Detector

Make : Hneywell

Model No.: HM-PSE-S2



Watch video



Scan product

Ref: KT107001001REDE

Analogue Addressable Photoelectric Smoke Detector RAVEL

Model No. : RE 317D - SHL

* FEATURES

UL listed

Dual LED's for 360 visibility.

Advanced detection and communication protocol.

Easy installation and maintenance.

Sleek low-profile housing design.

Regular 100mm base.

Address setting by 8 digit DIP switch

Operating Voltage : 17 ~ 28V DC

Reset Voltage : less than 3V

Standby Current : 500 μ A..

Alarm Current : 5 mA

Start Up Time : 3...



Scan product



Ref: KT107001001HMCP

Red Add Call Point Flush Mounting Glass

Model : HM-MCP-GLASS

Dimensions:- Semi-flush mounting: 89 x 93 x 27.5 (WxHxD)

Surface mounting : 89 x 93 x 59.5 (WxHxD)

Weight :- 110g.

IP Rating:- IP24D.

Operating Temperature :- 0°C to 49°C.

Relative Humidity :- 10% - 93% non-condensing.

Operating Voltage :- 15V to 32Vdc max.

Current Consumption :- Quiescent (without isolator) 385µA.

Alarm Current: 7.8 mA

- Warranty:- 1 Y...



Scan product

Ref: KT107001001MSMD

Smoke Detector Morley

Smoke Detector.

Make:- Morley.

Warranty:- 1 Year.



Scan product



Ref: KT10700100HP720

Smoke Detector Siemens

Model : OP720 Smoke detector

Automatic fire detectors

For the automatic addressable detector bus C-NETThe optimum smoke detector for all applications

- Signal processing with detection algorithms
- Automatic address allocation during commissioning
- Reliable detection of emerging fires
- Suitable for air speeds up to 5 m/s for OH720 and OP720
- Communication via C-NET (individ...



Scan product

Ref: KT107001001P994

P 9940A Class A RS485 Network Card GST

Features

- Two photoelectric isolation RS485 interfaces
- Suitable for ring network

Description

□ P-9940A is an optional card for GST200 series control panels, providing two photoelectric isolation RS485 interfaces.

□ This card shouldn't be inserted and removed when it is energized.

□ When entering calibration mode, pressing SK1 key (reset main board), it will display Color CRT...



Scan product



Ref: KTI07001001SOUN

Intelligent Wall Mounted Sounder Strobe Honeywell

Product Type - Security Alarm

Weight - 238 g

Product Name - Intelligent Wall Mount Sounder

Alarm Type - Audible, Visual

Product Functions - Alarm

Sound Emission - 97 dB

Input Voltage - 24 V DC

Power Source - DC Supply

Warranty:- 1 Year



Scan product

Ref: KTI07001001RSDE

Addressable Smoke Detector RAVEL

Supply of Addressable Smoke detector with base with Binary coded address setting. Dual LED's for 360° visibility. Sleek low-profile housing design. Regular 100mm base. IP Rating : IP - 42. Approval: UL Listed, Make: Ravel

* Warranty:- 1 Year



Scan product



Ref: KTI070010019101

Intelligent Photoelectric Smoke Detector With Base GST Model DI 9101E , DB 01

Model No:-DI-9101E + DB-0.

Feature

Electrically addressed.

LED for 360° vision.

2 levels smoke sensitivities, level 1 complies with EN 54-7.



Technical Specifications

Standard: EN54-5, EN54-7.

Operating Voltage: 24VDC.

Operating Current: Standby Current: 0.8mA.

Alarm Current: 1.8mA (without remote indicator).

Temperature: -10°C to +50°C.

Relative Humidity: 95%, non condensing.

Smok...



Scan product

Ref: KTI00700100ASOM

Addressable Single Output Module GST

Addressable Single I/O Module.

Standard:- EN 54-18:2005.

Monitoring Power Supply.

Warranty:- 1 Year



Scan product



Ref: KT107001001RESO

SOUNDER CUM FLASHER

* Main Features

- Easy to install.
- Operates on 24VDC
- 100db at 30cm.
- Low Current.
- Ceiling/ Flush Wall Mount.

* Application/Usage

- Fire Alarm, Security

* Physical Characteristics

- Depth - 55 mm
- Form Factor - Ceiling Mountable, Flush Mount, Wall Mountable
- Height - 126 mm
- Width - 126 mm
- Warranty:- 1 Year



Scan product

Ref: KT107001001ZXSE

ZX2SE 1 2 LOOP CONTROL PANEL Morley

ZX SERIES CONTROL PANELS: ZX2SE 1-2 LOOP CONTROL PANEL

720-001-301

ZX2Se 1-2 loop control panel. 230Vac, 2 sounder circuits, 4 line display and networking capability. 400 x 400 x 135mm (H x W x D). Order loop cards separately. Languages supplied: English, Italian, Spanish, Portuguese, Polish, Dutch, Slovenian and Croatian.

ZX2Se 1-2 loop control panel. 230Vac, 2 sounder circui...



Scan product



Ref: KTI07001002P994

P 9945A Loop Network Card GST

P-9945A Loop Network Card

Features

- Two photoelectric isolation RS485 interfaces.
- Suitable for ring network

P-9945A Loop Network Card



Com. Interface -Two RS485 interfaces

Com. Distance -The distance between two neighbor nodes is less than 1200m

Network Capacity Maximum 32 GST series control panels for networking

Transmission Medium 1.0 mm² or above twisted pair, shielded twisted pair is recommende...



Scan product

Ref: KTI007001001D92

Manual Call Point Digital GST DI 9204E

Features

- Electronically addressed. The address can be modified in field.
- Alarm by pressing, reset by a special key.
- Plug-in structure.
- Standard: EN 54-11.

Description

Connecting to the loop of GST fire alarm system, DI-9204E Digital Manual Call Point (MCP) is suitable for public places. When there is a fire, pressing the frangible element on this MCP can send fire signa...



Scan product



Ref: KTI07001001I940

I 9403 Intelligent Sounder Strobe GST

Technical Specifications



- ☆ Operation Voltage: 24VDC Loop, 24VDC Power Supply
- ☆ Operating Current:

Power-saving mode:

Loop-powered:

Loop monitor current $\leq 2\text{mA}$

Start current $\leq 9\text{mA}$

External 24V powered:

Loop monitor current $\leq 1\text{mA}$

Start ...



Scan product

Ref: KTI007001001DI9

Smoke Detector Photoelectric DC 9102E

Technical Specifications



- ☆ Standard: EN54-7
- ☆ Operating Voltage: 24VDC
- ☆ Operating Current:
 - Standby Current $\leq 0.06\text{mA}$
 - Alarm Current $\leq 55\text{mA}$
- ☆ Operating Environment:
 - Temperature: -10°C $\sim$ $+50^{\circ}\text{C}$
 - Relative Humidity: 95%, non condensing
- ☆ Dimensions: Diameter 100mm; Height 54.5mm

Feature

- ☆ LED for 360° vision
- ☆ Featu...



Scan product



Ref: KT107001001THER

Photo Thermal Multi Criteria Honeywell Detector Honeywell

Model -Hm-ptse-ap with base
Product Description

We put forward a broad range of Photo Thermal Multi Criteria Detector. The offered range is designed in adherence with the set industry standards using advanced technology and optimum quality basic material at vendors' end. In tune with international quality standard, we provide the entire range in various sizes and specificatio...



Scan product

Ref: KT107001001LIMD

Loop Isolation Module

Loop Isolation Module
Model:- MI/DISO
Make:- Honeywell-Morley IAS
Warranty:- 1 Year



Scan product



Ref: KT107001001AHCM

Addressable Control Module Honeywell

Addressable Control Module
Honeywell Notifier FCM/1



Scan product

Ref: KT107001001FLIS

Addressable Isolator Module Honeywell

Model no.: MI/DISO M200E-SMB

DIN rail mounting option

- Surface mounting option
- Plug in connectors
- Tri-colour LED status indication
- Address selector switches visible in 2 planes
- LED status visible in 2 planes

Addressable Isolator Module for Isolating short / dewired / loose circuits. Isolator Base can also be proposed, however in that case needs to be considered with ea...



Scan product



Ref: KT107001001BMDT

Intelligent Reflective Beam Detector GST Model I 9105R



Model Number:- I-9105R
Protection Rating: IP20*
Operating Voltage
Power Voltage: 24Vdc ($\pm 10\%$)
Loop Voltage: 24Vdc
Operating Current
Standby current: 12mA
Alarm current: 22mA
Length of Optical Pathway: 8-100meter
Standards: BS EN54 Part-12
Monitoring width: 14m
Monitoring Area: 1400m²
Operating Temperature: -10°C to +50°C
Wiring: 1 pair -24Vdc, 1pair- loop
Dimensions: 206mm X 95mm



Scan product

Ref: KT107001001DXC1

DXc1 One Loop Fire Alarm Control Panel HONEYWELL



Single Loop Control Panel, 230Vac,
2 sounder circuits.
Dims 260 x 390 x 147mm (H x W x D)
714-001-111 DXc 1 Control Panel
Warranty:- 1 Year



Scan product



Ref: KT107001001DXC2

DXc2 Two Loop Fire Alarm Control Panel Without Battery HONEYWELL

Two Loop Control Panel, 230Vac, 2 sounder circuits.
Dims 391.5 x 390 x 147mm (H x W x D)



The DX Connexion is an enhancement of the Morley-IAS Dimension panel range, connecting the traditional Morley-IAS qualities of reliability, flexibility and value with advanced features and intuitive functionality.

The multi-protocol DX Connexion range of fire alarm control panels has been...



Scan product

Ref: KT107001001DXC4

DXc4 Four Loop Fire Alarm Control Panel Without Battery HONEYWELL

Four Loop Control Panel, 230Vac, 2 sounder circuits.
Dims 391.5 x 390 x 147mm (H x W x D)



DXc4 Four loop Fire Alarm Control Panel 4 loop card
inbuild198 addressable points 99 detectors Plus 99 devices
6*40 character blue crystal display with backlight
illumination 2 Sounder circuits Requires network card
MOF79509
Warranty:- 1 Year



Scan product



Ref: KTI07001001ZXRA

Zxra Active Repeater Silence Mute Reset Honeywell

Main Features

- * Compatible With All Morley-ias Intelligent Multi-
- * Protocol Fire Alarm Control Panels
- * Connects to Rs485 Peripheral Bus
- * Active or Passive Options
- * Backlit Adjustable Alphanumeric Display
- * General Status Leds
- * Controls for System Reset, Accept, Mute, Silence Alarms, and Self Test (Active Repeater Only)
- * "Access Enable" Key-switch on Active Repeater
- * War...



Scan product

Ref: KTI007001001P99


RS 232 Card Model No. P9930 GST

Features

- Standard RS232 and USB interfaces.
- Connecting GST Graphic Monitor Center and GST Defining Tool.

Description

- P-9930 RS232 card is an optional card for GST200 series control panels, providing two photoelectric isolation RS232 interfaces for connecting with GST Graphic Monitor Center and GST Defining Tool.
- This card shouldn't be inserted and removed when it is ene...

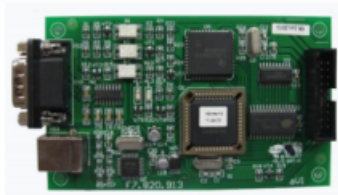

Scan product



Ref: KT1007001001TXMD

Wireless Multi Detector Addressable SD728V 1 1

Wireless Multi Detector Addressable
Model no:SD728V-1-1
Make :Textel



Scan product

Ref: KT1007001001TXSD

Wireless Smoke Detector Addressable SD 728V 1

Wireless Smoke Detector Addressable
Model no:SD-728V-1
Make :Textel
Warranty:- 1 Year



Scan product



Ref: KT100700100ADIM

Addressable Input Module GST

Addressable Input Module.
Standard:- EN 54-18:2005.
Monitoring Power Supply.
Warranty:- 1 Year



Scan product

Ref: KT100700100IUFM

Intelligent Ultraviolet Flame Detector With Base GST

Three sensitivity levels.
High sensitivity, reliable performance, dust-proof,
damp-proof and corrosion-proof
Warranty:- 1 Year



Scan product



Ref: KT10070010EM921

Wireless Manual Call Point EM921

Wireless Manual Call Point

Make : Textel

Model no: EM921

Warranty:- 1 Year



Scan product

Ref: KT1007001SD351E

Smoke Detector Conventional Photoelectric 5351 E

Low profile design

- Low current draw
- Backward compatible with Series 100 detector range of bases
- Wide operating voltage 8 to 30VDC
- Bi-colour LED detector status indicator
- Automatic drift compensation
- Programmable sensitivity
- Addressable feature
- Advanced maintenance features via remote hand-held test unit
- Range of detector bases available
- Tested and approved t...



Scan product



Watch video



Ref: KT101001001P991

ProgrammerTool GST Addressable fire Alarm sensor

Programmer Tool.
GST Addressable fire Alarm sensor



Scan product

Ref: KT1070010019404

I 9404 Intelligent Sounder GST

Model:- I-9404 Intelligent Sounder
Providing 16 tones
Loop powered or external 24V powered
Power-saving consumption mode and normal consumption mode (factory default).
Single/dual address programmable.
Standard: EN 54-3.
Warranty:- 1 Year



Scan product



Ref: KT107001001ABTR

Analogue Beam Sensor Morley

The MI-LPB2-S3I is an Optical Beam Detector based on Reflective Technology. It is supplied as a combined transmitter/receiver unit with a reflector.

Suitable for distances from 10m to 70m

Warranty:- 1 Year



Scan product

Ref: KT107001001ADCM

Addressable Control Module RAVEL

Special Features:

* Features:

- Indian Manufacturer - International Standard.
- UL-Listed (9th Edition).
- Modular Construction.
- Supervised a Class 'B' Style 'Y' output circuit.
- Module Status by RED LED.
- Analogue Communication with the panel.
- Module Addressing by 8 way DIP switches.
- Low Standby Current.
- Available with suitable back boxes.

Warranty:- 1 Year



Scan product



Ref: KTIO7001001AFSP

Addressable Photoelectric Smoke Detectors Notifier FSP951R

FSP/951R : heat detector Honeywell notifier WITH B-501 : base



SLC LOOP:

- Two-wire SLC loop connection:
- Unit uses base for wiring:
- Compatible with FlashScan and CLIP protocol systems:
- Stable communication technique with noise immunity:

ADDRESSING::

- Addressable by device:
 - Rotary, decimal addressing:
- (Refer to the NOTIFIER panel manuals for device capacity.):
Walk test...



Scan product

Ref: KTIO7001001AVAN

Analogue Addressable Fire Alarm Control Panel RAVEL AVANI



Primary Power

- * 120 / 220VAC + 10% -15%, 60 / 50 Hz

Signaling Line Circuits

- * Loop card : 4 Nos. Maximum.
- * No Devices per loop : 254
- * Loop resistance : 40Ω (Max.).
- * Loop capacitance : 0.6 μf (Max.).
- * Loop Current : 300mA (Max.).

Standby Power

- * 24V D.C (2 No's of 12V, 40 Ah (Max), Built in for 12Ah)
- * Sealed Lead acid battery

D.C. Output

- * Supervised 24VDC, 300mA Max.
- * ...



Scan product



Ref: KT107001001BASE

Base For Smoke Detector

Base For Smoke Detector.




Scan product

Ref: KT107001001BDTR

4 wire Conventional Beam Smoke Detector

16- to 328-foot protection range

- Single-ended, reflective design
- User-friendly alignment procedure
- Six user selectable sensitivity levels
- Optional integral NFPA 72 sensitivity test feature
- Removable plug-in terminal blocks
- Digital display for easy alignment
- Built-in automatic gain control compensates for signal deterioration from dust build-up
- Remote test statio...

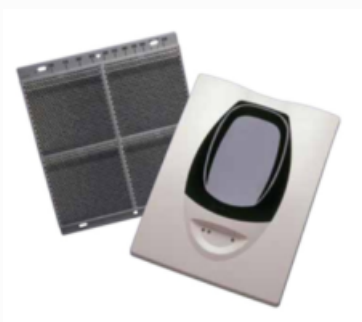

Scan product



Ref: KT107001001CONT

RE 717MC Analogue Addressable Control Module RAVEL

* Special Features:

* Features:

- Indian Manufacturer - International Standard.
- UL-Listed (9th Edition).
- Modular Construction.
- Supervised a Class 'B' Style 'Y' output circuit.
- Module Status by RED LED.
- Analogue Communication with the panel.
- Module Addressing by 8 way DIP switches.
- Low Standby Current.
- Available with suitable back boxes.

* Electrical Specificati...



Scan product



Ref: KT107001001DB01

Intelligent Photoelectric Smoke Detector With Base GST Model DI 9102E , DB 01

Model No:- DI-9102E + DB-01

Integrated algorithm of analyzing fire, recognize black smoke quickly

Drift sensitivity, suit to environment extensively.

Identification of defective detectors.

Diameter: 100mm ,Height: 44.5mm(without base)

Featuring magnetic test.

Removable innovative sensing chamber, easy for maintenance.

The fire LED allows 360°viewing.

Providing output terminal c...



Scan product



Ref: KT107001001FLMD

Triple IR Flame Detector



Suitable for ATEX zone 2/22; FM 3611 Class 1,2&3 Div2 EN54-10 (HIGH sensitivity) certificate. FM3260 approval. Red Housing.

Range:- 110 ft /35 m (IR3), 25 m/80 ft (UV, UV/IR) alarming within 10 seconds to a 1 ft2(0.1 m2)n-heptane fire.

Warranty:- 1 Year



Scan product

Ref: KT107001001FST8

851 Series Thermal Heat Detectors Honeywell

Specifications

FST-851 Fixed Temperature Thermal Detector

Operating Temperature: -4°F to 100°F (-20°C to 38°C)

FST-851R Rate-of-Rise Thermal Detector

Operating Temperature: -4°F to 100°F (-20°C to 38°C)

FST-851H High Temperature Thermal Detector

Operating Temperature: -4°F to 150°F (-20°C to 66°C)

Rotary address switches

Dual LEDs for 360° visibility

UL Listed: S747

MEA Listed...



Scan product



Ref: KT107001001GS2L

Intelligent Addressable Fire Detection, Alarm system Two loop panel GST



Model:- GST200N-2

Max. 30 zones. Each zone has its own alarm and fault/disable indicator and a label.

Single loop panel capacity 235 addressable devices

2-loop panel capacity 477 addressable devices

Compatible with GST intelligent and digital products

8X18 characters LCD screen

15 LEDs to display important information

Non-Volatile memory ensures no loss of data even if power S...



Scan product

Ref: KT107001001GST2

Intelligent Addressable Fire Detection, Alarm system One loop panel GST



"One loop panel
Model No. -GST1001"

Feature

☆ GST100N Series Panel contains 1 loop version GST100N-1, 2 loops version GST 100N-2 and several other language variant models. 1 loop model can be extended to 2 loops by using an additional loop card (LC200).

☆ Maximum loop capacity 477 intelligent devices □ 1 loop model loop capacity is 235 intelligent devices □

☆ W...



Scan product



Ref: KT107001001GST8

Intelligent Addressable Fire Detection, Alarm system with 8 Loop Panel

GST-IFP8 Intelligent Fire Alarm Control Panel
Feature

- ☆ 8 x Loops (242) capacity (1936) addressable points
- ☆ Modular constructed for future expansion
- ☆ 40 x15 lines LCD Display
- ☆ Up to 999 programmable zones and 140 zones' indication
- ☆ Day and Night Mode
- ☆ Enable and Disable function
- ☆ PAS and Acknowledge Function
- ☆ Dirty Detector Reporting
- ☆ Duplicate Address Checkin...



Scan product



Ref: KT107001001HEAT

Intelligent Rate of Rise and Fixed Temperature Heat Detector With Base GST Model DI 9103E, DB 01

Feature

Electrically addressed.
Self-diagnostic.
LED for 360° vision.
LPCB Approved.

Technical Specifications

Standard: EN54-5.
Operating Voltage: 24VDC
Operating Current: Standby Current: 0.6mA.
Operating Environment: Temperature: -10°C □ +50°C, Relative Humidity: 95%, non condensing
Detector Class: A1R, A2S, BS.



Scan product



Ref: KTI07001001HORN

Conventional Type Horn RAVEL

Supply of Conventional type Horn wall mounted type rated at 100 dBA @ 1m for Audible annunciation - Make: Ravel
Note: Need to Connect with Addressable Control Module
* Warranty:- 1 Year



Scan product

Ref: KTI07001001ISOL

Loop Isolation Module Requires M200ESMB

Marketing Information
Complete With Plug-in screw connections and tri-colour LED.

Information

Name : Loop isolation module. Requires M200E-SMB for surface mounting or M200E-DIN for mounting to DIN rails.,
Honeywell International, Inc, ADI India, Morley-IAS
Category : Addressable Module, Fire, Isolators, Products

Device Supported - Control Panel
Physical Characteristics
Depth ...



Scan product



Ref: KT107001001ISRV

Fault Isolation Module RAVEL

Supply of Fault isolator Module capable of monitoring shorted loop circuit and automatically restore communications when shorted conditions are corrected -
Make: Ravel
Warranty:- 1 Year



Scan product

Ref: KT107001001MCPB

MCP Back Box

MCP Back Box.



Scan product



Ref: KTI07001001MELC

Loop driver card for Morley

Loop driver card for Morley-IAS protocol, 460mA.
Honeywell-Morley IAS
Model No.: 795-072-100



Scan product

Ref: KTI07001001MODU

Single Input Monitor Module Honeywell



- * Morley-IAS by Honeywell's modules are designed to help you meet a wide range of application requirements. Consult the list to locate a module for your specific fire alarm system
- * The various part codes under the Morley-IAS by Honeywell modules portfolio are as below:
- * Part Code
- * Description
- * MI-DMMI
- * Single Input Monitor Module, requires M220E/SMB for surface mounting or...



Scan product



Ref: KT107001001OPCM

Output Control Module

Output control module Requires M200ESMB for surface mounting or M200EDIN for mounting to DIN rails.
Warranty :- 1 Year



Scan product

Ref: KT107001001P991

GST P 9910B Hand held Device Programming Tool

Feature

- ☆ Hand held unit, portable tool
- ☆ Convenience operation
- ☆ Quadruple digit alphanumeric LCD display
- ☆ Programs all loop devices (1-242)
- ☆ Low-consumption hibernation and power saving function
- ☆ Low battery indication

Technical Specifications

- ☆ Standard: EN54-part 5 and part 7
- ☆ Power: One laminated battery, 9V
- ☆ Operating Current: $\leq 8\text{mA}$
- ☆ Operating Environment: Tempera...



Scan product



Ref: KT107001001PSCM

Power Supply For Control Module

Power Supply For Control Module



Scan product

Ref: KT107001001RAHE

Analogue Addressable Heat Detector RAVEL

* Product Overview

- The RE 317D-HL addressable detectors are designed to work with Avani Panel. These detectors are low profile and have dual LED's for 360 visual indication. The LED's are blinking in normal operating condition whereas the steady state indicate fire status. RE 317D-HL is a fixed cum rate of rise heat detector using a thermistor. These detectors will raise an ...



Scan product




Ref: KT107001001RALC

Addressable Loop Card RAVEL

Supply of Loop Card which will have 254 devices of both detectors and modules in a single line circuit, SLC supports both Class A and Class B wiring Approval: UL Listed, Make: Ravel

* Warranty:- 1 Year

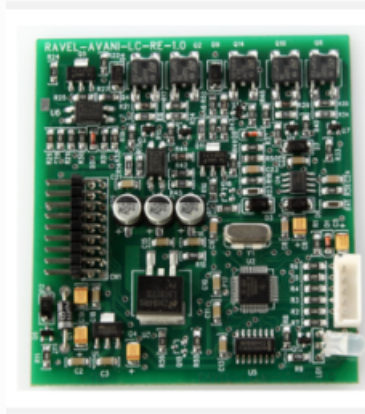

Scan product

Ref: KT107001001RAMC

RE 717M Analogue Addressable Manual Call Point RAVEL

* FEATURES

- Complies EN54-11.
- Type "A" Indoor Use.
- Resettable by an element kit.
- Suitable for flush or surface mounting.
- Module Addressing by 8 way DIP Switches.
- Low Standby Current

* Mechanical

- Temperature : 0 - 49 C
- Relative Humidity : 0 - 93% non-condensing
- Connection : 2.5mm Max.
- Weight : 125g.
- IP Rating : IP 50
- Dimension : 86mm X 86mm X 50 mm

* Ele...



Scan product




Ref: KTI07001001RELC

RE LC Addressable Loop Card RAVEL

* Product Overview

- RE-LC
- Features:- Auto learning facility.
- Loop wise device test .
- Lloop card can programmable as Class A, Style 5,6 or 7 and Class B Style 4 wiring.
- Maximum 254 devices (any combination) per loop.
- Addressable Loop Card
- RE-LC Loop Card for AVANI, intelligent addressable fire alarm control panel.
- Up to 254 devices can be connected to a single lo...

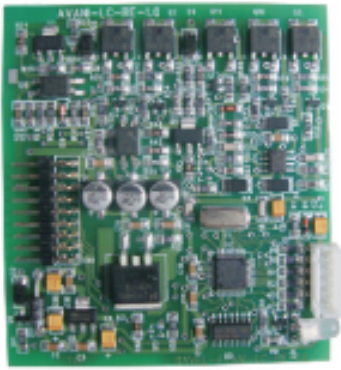

Scan product

Ref: KTI07001001RERA

RE RI Response Indicator RAVEL

- RE-RI - Response Indicator
- Compatible for 2 wire detectors.
- Alarm status is indicated by red colour LED.
- Operates on 12 VDC.
- Dual LED's for 360 visibility
- Flush / Ceiling wall mount
- Operating Voltage :12 VDC
- Operating Current : 10mA
- Alarm Indication : RED LED.
- Operating Temperature : 0 to 49 C. ?Storage temp :
- Colour : Ivory.
- Warranty:- 1 Year



Scan product



Ref: KT107001001RESP

HONEYWELL Response Indicator HONEYWELL

HONEYWELL Response Indicator
Warranty:- 1 Year



Scan product

Ref: KT107001001RMCD

Multi Criteria Detector RAVEL

Supply of Addressable Multi Criteria detector with base with
Binary coded address setting. Regular 100mm base. IP
Rating : IP - 42. Approval: UL Listed, Make: Ravel
* Warranty:- 1 Year



Scan product



Ref: KT107001001RPPN

Network Repeater Panel GST

Network Repeater Panel.
Voltage: 20VDC□27VDC.
Warranty:- 1 Year.




Scan product

Ref: KT107001001SIMD

Single Input Monitor Module

Single Input Monitor Module requires M220ESMB for surface mounting or M200EDin for mounting to DIN rails.
Warranty :- 1 Year



Scan product



Ref: KT107001001SKIT

Surface Mounting Kit For Beam Detector

Surface Mounting Kit For Beam Detector



Scan product

Ref: KT10700100FIMOR

Fault Isolator Morley

MI-DISO

DIN rail mounting option

- Surface mounting option
- Plug in connectors
- Tri-colour LED status indication
- Address selector switches visible in 2 planes

- LED status visible in 2 planes

- Approved to GEA GEI 1-082

and CEA GEI 1-084

Dimensions (mm) 93 x 94 x 23 (H x W x D)

Weight 62g

Operating Temperature -20 °C to +60 °C

Humidity 0 to 95% maximum non-condensing
Warran...



Scan product



Ref: KT10700100LISOL

Loop Isolator Model no C 9503E GST

Loop Isolator
Model No.: C-9503E
Warranty:- 1 Year



Scan product

Ref: KT10700100RE517P

Active Repeater Panel RE 517 RP

Model no.: RE - 517 RP
32 bit processor
160 (40X4) character LCD Display
Event Storage with Real Time Clock
RS 485 communication for Network / Repeater
One Programmable form C relay for fire
Extensive built in transient protection
Lamp test facility
Common fire, supervisory, fault LED indication
Operating Condition
Operating Temperature 0 - 49° C/32-120° F.
Relative ...



Scan product



Ref: KTI070010RS485C

RS 485 Communication module Morley

RS 485 Communication module
Honeywell-Morley IAS
Model No.:795-004-001



Scan product

Ref: KTI16017002FASP

Wireless FDA Fire Alarm Addressable Panel

Textel Alert Wireless FDA Panel with Power Supply and built in battery back-up.



Scan product



Ref: KT116017002WLSD

Wireless Sounder

Wireless Sounder
Make: Textel
Model no: WSS



Scan product

Ref: KT116017002WLSD

Wireless Sounder

Wireless Sounder
Make: Textel
Model no: WSS



Scan product