



Product Catalogue

Intrusion System

Security > Home Security Automation Solutions > Intrusion System



KT Automation Private Limited · D 32-33 Kamalanjali Commercial Complex,
Radhakrishna Crossing, Akota · 390020 Vadodara



Ref: KT108003002VS02

Atigo Wireless Vibration Sensor



Built-in DC3V, CR2032 Li Battery can Last for over 2 Years.
Door Contact Alarm and SOS Button Alarm Function.
Alarm Current: $\leq 15\text{mA}$ Working Temperature: $-5^{\circ}\text{C} \sim +50^{\circ}\text{C}$ Humidity: $\leq 90\%$
Warranty:- 1 Year



Scan product

Ref: KT108003001DS04

Atigo Wireless Door Sensor



Signal Transmission Distance: No Obstacle 80m
Alarm Distance: Gap Between Transmitter & Magnetic Bar $\leq 10\text{mm}$
Power Supplied: 3V Lithium Battery CR2032



Scan product



Ref: KT108003011FD01

Atigo Wireless Hybrid Smoke Sensor Smoke Heat



Power Supply: 9/12 V
Operating Current: 10uA (normal) and 20-50 MA (alarm working).
Sensitivity of Smoke Detector: In Compliance With UI217 & BS5446: Part 1 2000.
Kite Mark License Number: KM 53166 0.8-1.42% FT.
Operating Temperature: 40° F – 100 f (4.4 ° C- 37.8 ° C).
Ambient Humidity: 10% - 90%.
Size: 106mm* 33.5mm
Covering Area: 15m² Loud Sound of 80 DB at Alarm Mode.
Warran...



Scan product

Ref: KT108002001SSP3

Intrusion System Atigo AlarisV2 Panel

SMART SAFETY PANEL – ALARISV2
PACKAGE DETAILS-1 Passive Infra-Red Sensor,1 Siren,1 Door Sensor,2 Remote Controllers,1 Adapter
Specification-
Remotely Operated Wireless Security Panel With English Voice Prompt.
96 Wireless and 3 Wired Defense Zones; Each Could Be Programmed Independently. Can Be Operated With 99 Remote Controls. Sensor Low Voltage Alarm & Sensor Tamper Alarm Eng...



Scan product



Ref: KT108003004PI10

Atigo Wireless Pet Immune PIR Sensor Model No PI 101



Low Battery LED Indication
Pet Weight: 10 Kg
Detection Distance: 10~12m (12°C)
Detection Angle: Horizontal 110°, Vertical 60°
Battery: 9V
Warranty:- 1 Year



Scan product

Ref: KT108003002ATMO

Atigo Wireless Motion Sensor



WIRELESS PIR SENSOR
Low battery LED indication.
Detection Distance: 10~12m (12°C).
Detection Angle: Horizontal 110°,
Vertical 60°
Battery: 9V.
Recommended Battery: 9v Duracell



Scan product



Ref: KT10800200HVDP

Door Protect 8IN

Wireless magnetic opening detector

- Installation method: Indoors
- Activation threshold: Small magnet - 1 cm, Big magnet - 2 cm
- Allows connection to a third-party wired detector



Wireless opening detector that notifies of first signs of room intrusion by means of a broken door or window. It can be mounted on all types of doors including a metal base.

The device consists of ...



Scan product

Ref: KT10800200SC8I

Space Control 8IN

Security system key fob with panic button

- Number of buttons: 4 (Arm/Dis Arm/Night Mode/Panic)

Application : Wireless indoor siren that loudly notifies of an alarm during detector activation. It is installed indoors to warn of danger or deter intruders.



Used of / utility : Jeweller shop , Home ,Office etc ...
No Warranty of Battery




Scan product



Ref: KT108003010BD20

Beam Detector 100 Ft.

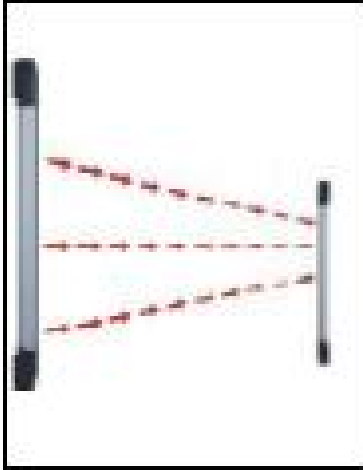

Photoelectric Infrared Beam Sensor Works With Alarm System.

Power Supply: 12V DC Adapter.

Covering Distance: 20m

Anti-interference of Light Arrives at IP85.

Warranty:- 1 Year



Scan product

Ref: KT10800200HSSI

Home Siren 8IN

Wireless Indoor Siren

- Connector for external LED: Available
- Sound volume level: Adjustable, 81–105 dB
- Protection class of body: IP50

Home Siren is a wireless home siren with the capacity up to 98 db. Developed only for indoor use. It can be quickly installed and set up, is furnished with a LED (plus allows connecting an external LED), and can operate up to 5 years from...



Scan product



Ref: KT108003013RC01

Atigo Remote Control

Power Supply: 6V DC

Lithium Battery Working Current: $\leq 3.5 \text{ mA}$

Emitting Power: $\leq \frac{3}{4} 10\text{mW}$

Operating Range: 80m~100m

Warranty:- 1 Year



Scan product

Ref: KT108003006W056

Atigo Wireless Outdoor Flash Siren Model No W0S01

Standby Current: $< 10 \text{ mA}$

External Power Supply: DC12V/1.2A

Recharging Current: 310 mA Alarm Current: 350 mA

Wireless Receiving Distance: $> 80\text{M}$ (no obstacle)

Humidity: 90% (no fog)

Built-in Battery: Polymer Battery 7.4 V/2100 mA Battery back-up.

In-built Tamper Alarm.

Alarm Volume: 140 DB

Warranty:- 1 Year




Scan product



Ref: KT108003015SB01

Atigo Signal Repeater Model No SB01

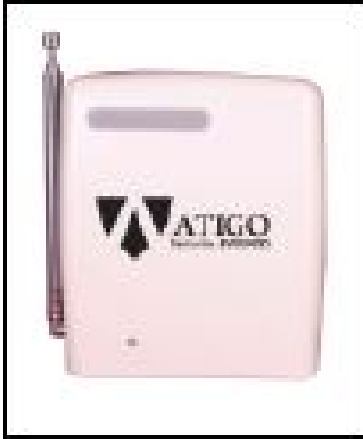

Working Voltage: 12 V DC
Adapter Static Current: 10 mA
Working Current: 180mA
Operating Temperature: 10°-50°
Ambient Humidity: Less than 95% RH
Maximum Receiving Distance: 80 m Maximum Transmit Distance: 500 m
Warranty:- 1 Year



Scan product

Ref: KT108001001SECA

Securico Alarm System



Micro-controller based
4 zone control panel
On board key pad
Two fully programmable codes (master and servant codes)
20000 code combinations
One delay zone, one immediate zones, one 24 hour panic zone, one 24 hour fire zone
Built in battery backup provision
Zone omitting facility
9 led display
5 leds indicate operational status
4 leds indicate individual zone status
...



Scan product



Ref: KT10800200AHINT

Intrusion System Hikvision

Model No.: DS-PWA32-KG

RF Range: 800m (Open Area)

Supports up to 32 wireless inputs, 4 wireless output expanders

Offers multiple communication methods: LAN + Wi-Fi + GPRS

Up to 2-ch. on-board video verification

Offers reliable protection utilizing two-way wireless technology

Wireless connection reduces installation time

Detection Range- 10m(DS-PD2-P10P-W(433MHz))

Warranty:- 1 Ye...



Scan product

Ref: KT10800200B8IN

Wireless Button 8IN

Wireless Panic Button / Smart Button

- False Alarm Prevention: Yes (In the Panic mode)

- Adjustable Alarm types: Intrusion, Fire, Medical Help, Panic button, Gas leak

- Protection class: IP55



Scan product



Ref: KT10800200HKPD

Wireless Keypad 8IN

Wireless touch keypad to arm/disarm an Ajax system

- Installation method: Indoors
- Protection against password attack & passcode guessing
- Arming/disarming indication: Yes



Scan product

Ref: KT10800200MCOD

Motioncam Outdoor 8IN

Wireless outdoor IR Motion detector with a photo camera to verify alarms

- Sensing element: Two PIR sensor
- Motion detection distance: Adjustable, up to 3-15 m
- Motion Detection angles: Horizontal - 90° & Vertical - 80°
- Protection class: IP55 (Hood comes along with sensor)



Scan product



Ref: KT10800200MMPO

Motion Protect Outdoor 8IN

Wireless IR motion detector for outdoor & indoor use

- Sensing element: Two PIR sensor
- Motion detection distance: Adjustable, up to 3-15 m
- Detection angles: Horizontal - 90°
- Protection class: IP55



Scan product

Ref: KT10800200WODC

Dual Curtain Outdoor 8IN

Wireless outdoor bidirectional curtain IR Motion detector

- Motion detection distance: 4 to 15 m (depending on setting)
 - Protection class: IP54
 - Compatible with Hub2, Hub2 (4G), Hub2 Plus & ReX/ReX2
- DualCurtain Outdoor is a wireless bidirectional curtain-type motion detector. With two PIR sensors on each side, the DualCurtain Outdoor detection zone reaches 30 meters, effectively...



Scan product



Ref: KT108003001DHS4

Hikvision Wireless Magnetic Contact



Communication Frequency: 433MHz

□ Function of preventing wireless data conflict.

□ Two-ways Communication: 800 (open area).

□ 3V button battery (2 years)

□ Dual reeds with design

Warranty:- 1 Year



Scan product

Ref: KT108003001DSPB

Atigo Wireless Panic Button



Power Supply: 12V, 27A Battery

Battery Life: > 1 year

Range: 80 meters in open space

Operating Temperature: -20 ~ + 50°C

Humidity: Up to 95% non-condensing.



Scan product



Ref: KT108003001WLS

Hikvision Wireless Outdoor Flash Siren Model No DS PMA WBELL

Model no: DS-PMA-WBELL

RF 433 MHz

Offers reliable protection utilizing two-way wireless technology

Supports tamper alarm

Communicates up to 800 m (in open areas)

Siren: 105 dB

Warranty:- 1 Year



Scan product

Ref: KT108003003PI01

Atigo Wireless Passive Infra Red Sensor PIR Sensor

Power Supply: DC6V Dry Battery


Detecting Angle: Horizontal 110°, Vertical 60°

EV1527/IC2262

Compatible Detecting Distance: 12m max

Battery: 1.5V AAA 4Nos Alarm Current: <20mA Static

Current: <60uA

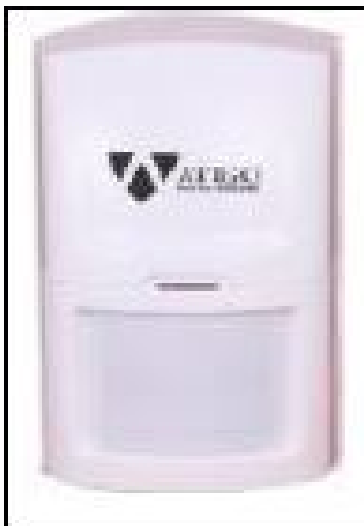

Scan product



Ref: KT108003004CWCS

Atigo Common wireless Curtain Sensor

Model : PI201A

Sensor : Double frequency (original import) and low voice instruction.

when an unauthorized person intrudes , it will be triggered.
can be installed upon windows, balcony, upper side of doors
and so on



Scan product

Ref: KT108003005PI30

Atigo Wireless Ceiling PIR Sensor

Detecting Angle: 360°C

Power Supply: 9V DC

Alarm Load: 150mA DC 30V

Maximum Installation Height: 3.6m

Adopts Metal Shield With Electromagnetic Immunity and
360° View Surface Covering Area: 9m

Warranty:- 1 Year



Scan product



Ref: KT108003006WIS2

Atigo Wireless Indoor Flash Siren Model No SIWO2



Waterproof, Weatherproof.
Sound Volume: 120dB.
Fixed 1 tone or circled 6 tone alarm indication.
Arm/Disarm: Can be set as ON/OFF
Flash: Different flashlights for choice
Wireless Sensors: Up to 100
Power Supply: AC 100 V / 220 V



Scan product

Ref: KT108003006WOS2

Atigo Wireless Outdoor Flash Siren Model No SOWO2



Waterproof, Weatherproof.
Sound Volume: 220dB.
Fixed 1 tone or circled 6 tone alarm indication.
Inbuilt battery backup.
Sound and light indication at the alarm time.
Tamper alarm function.
Alarm sound time 3 minutes or 6 minutes.
Power failure alarm.



Scan product



Ref: KT108003007WIS1

Atigo Wireless Indoor Flash Siren

Alarm Volume: 80 DB

The Sensor Will Ring With Flash When Alarm Rings.

Wireless Receiving Distance: 80M

Power Supply: 12V DC

Required Current: 500 mA

Warranty:- 1 Year



Scan product

Ref: KT108003008SD01

Atigo Wireless Shutter Door Sensor

Current: 0.5 A

Voltage: 3 VL

Power Rating: 10 W

Contact Resistance: 1T; = 200 Ohm

Action Distance: 15 - 20 mm

Weight: 136 Grams

Colour: Silver

Warranty:- 1 Year



Scan product



Ref: KT108003009SD02

Atigo Wireless Iron Door Sensor



Power Supply: DC 9V Battery
Gap for Trigger: >30-50mm
Colour: Silver
Warranty:- 1 Year



Scan product

Ref: KT10800300MWS01

Atigo Mini Wired Siren Model No MWS01



Mini Wired Siren
Mini Buzzer for WiFi Security System
Warranty:- 1 Year



Scan product



Ref: KT108003010B200

Beam Detector 200 Ft

BATTERY OPERATED PHOTOELECTRIC DETECTOR

Model -AX-200TFR

Range -60m(200ft.)

Beam frequency selection -4 Channel

Interruption period -Variable between 50, 100, 250, 500msec
(4 steps)



Scan product


Ref: KT108003010BA20

Atigo Beam Detector 20 Meter

Photoelectric infrared beam sensor works
with alarm system. Power Supply: 12V DC
Adapter.

Covering Distance: 20m

Anti-interference of light arrives at IP85.

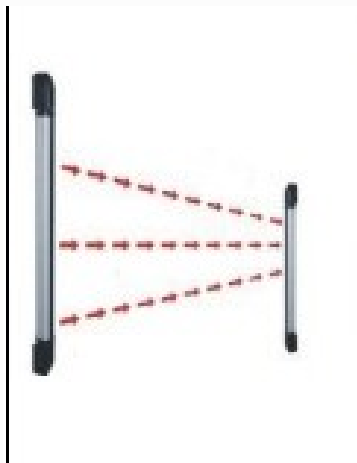

Scan product



Ref: KT108003012WGD2

Atigo Wireless Gas Sensor



High Accuracy AC-DC Adaptor Included. Loud Sound Signal of 85 DB at Alarm Mode. Suitable For The Safety Valve.
Detects: - LNG - LPG - Natural Gas - Civil Gas
Detecting Distance: 1.5m
Warranty:- 1 Year



Scan product

Ref: KT108003014PB01

Atigo Wireless Emergency Button



Battery Battery Life: > 1 Year
Range: 80 Meters in Open Space
Operating Temperature: -20 ~ + 50°C
Humidity: Up to 95% Non- Condensing.
Dimensions: 43 x 31 x 12mm.
Water Resistant.
Warranty:- 1 Year



Scan product



Ref: KT108003017WI01

Atigo Wireless Water Intrusion Sensor

Battery Life: >6 Months Low power consumption ensures long battery life.



Scan product

Ref: KT108020H24G8IN

Wireless Fire Alarm Control Panel Hub2 4G 8IN

Hub2 4G (8IN)

Control Panel supporting Jeweller & Wings protocols with 4G

- Communication: Ethernet, Dual SIM (2G/3G/LTE)

- Supported Notification types: Push, SMS, Calls

No image



Scan product