




Product Catalogue

Sensors

Accessories > Sensors

PIR Motion Detector

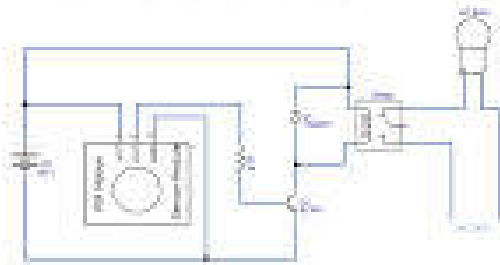

CIRCUITS BY



KT Automation Private Limited · D 32-33 Kamalanjali Commercial Complex,
Radhakrishna Crossing, Akota · 390020 Vadodara



Ref: KT104007001PHSW

Safety Photosensor

Safety Photosensor For Multiple Uses.
With NO,NC Facility
Power : 12V DC.



Scan product

Ref: KT104007001IPSN

Inductive Proximity Sensor

Square PNP-NC
Maximum Supply Voltage 40 Volts (DC)
Output Type PNP-NC
Sensing Distance 8 Millimetres
Specific Uses For Product proximity detection
Components SENSOR WITH 2MTR CABLE
Item Dimensions 36 x 18 x 18 Millimeters



Scan product



Ref: KT10400700DPMLS

Magnetic Limit Switch Ditec

Magnetic Limit Switch
Group6CS14FM



Scan product

Ref: KT10400700DSSLS

Sliding Shoe for Magnetic Limit Switch Ditec

Sliding Shoe for Magnetic Limit Switch
NC6CS230PFM



Scan product



Ref: KT104007001PHSP

Safety Photosensor Premium

Safety Photosensor For Multiple Uses.

Range : 18 to 22 Mtr

With NO,NC Facility

Power : 12V DC.



Scan product

Ref: KT10400700DPEBC

Electric Break Coil Ditec

Electric Break Coil 62656



Scan product



Ref: KT10400700DPHSL

Ditec Safety Photosensor LIN2

Photocell Model LIN2

Outside photocell - card that can be oriented in three positions

Capacity -Configurable 10 m – 30 m max

POWER SUPPLY - 24 Vdc - 24 Vac

POWER INPUT - Max 50 mA

RELAY CAPACITY - 24 Vdc / 1 A max

Temperature --20°C ÷ +55°C

Protection rating -IP44



Scan product

Ref: KT10400700DPBCK

Brake component Kit Ditec

Brake components kit NC6CS18KF



Scan product



Ref: KT104007001PHWW

Wireless Safety Photosensor

Wireless Safety Photosensor For Multiple Uses.
With NO,NC Facility
Power : 12V DC.



Scan product

Ref: KT101001001P991

ProgrammerTool GST Addressable fire Alarm sensor

Programmer Tool.
GST Addressable fire Alarm sensor



Scan product



Ref: KT101001002PAXE

Fireman Axe 50,000 Volt Tested

50,000 Volt Tested Fireman Axe
Type Of Axe Fireman Axe
Material MS
Usage/Application Fire fighting
Warranty: NA



Scan product

Ref: KT104007001PH1M

Photosensor 1 Meter Range

Photosensor For Multiple Uses.
3 Wire : 1- Positive, 2- Negative, 3- PNP.
Transmit and Received Inbuilt.
1 Meter Range
Power : 12V DC.



Scan product



Ref: KT104007001PH3M

Photosensor 3 Meter Range

Model : IBX 43

Photosensor For Multiple Uses.


3 Wire : 1- Positive, 2- Negative, 3- PNP.

Transmit and Received Inbuilt.

3 Meter Range

Power : 12V DC.

Color : Black Or Black



Scan product

Ref: KT104007001PHSN

Photosensor 2 Meter Range

Photosensor For Multiple Uses.

3 Wire : 1- Positive, 2- Negative, 3- PNP.

Transmit and Received Inbuilt.

2 Meter Range

Power : 12V DC.



Scan product



Ref: KT104007001PIMW

Passive infrared, Microwave Sensor



Model No,: FLX-P-DT

UL listed , dual tech PIR

Coverage -Wide□ 15 m (50') 85° ,Narrow□ 24 m (80') 5°(MW will be stopped in "Narrow" setting)

Dimension : H: 129.2 x W: 61.5 x D: 50.9 mm (H: 5.09" x W: 2.42" x D: 2.00")

Power Input -9.5 to 16 V DC



Scan product

Ref: KT104007001SLCS

Safety Curtain Sensor

Single Output Safety Light curtain

Model : LC 1290-410 -1OP-CW-OA

For outdoor application

Output :PNP NC

Supply : 24V DC

No. of Beams : 12

Pitch : 90mm

Protected height : 990 mm

Overall Height : 1125 mm

Range : 10 Mtr.



Each Set Consists:-

1. Transmitter - 1 No.
2. Receiver - 1 No.
3. Cable - 2 Nos.
4. Controller (1OP-CW) - 1 No



Scan product