



Product Catalogue

Notifier Fire Alarm System

Safety > Fire Safety Solutions > Fire Alarm System > Addressable Fire Alarm System > Notifier Fire Alarm System



KT Automation Private Limited · D 32-33 Kamalanjali Commercial Complex,
Radhakrishna Crossing, Akota · 390020 Vadodara



Ref: KT107001001ANMCP

Addressable Manual Call Point Honeywell Notifier F, MCP, GLASS SR

Addressable Break Glass Type Manual Call Point with Back box

Honeywell-Notifier F/MCP/GLASS + SR



Scan product

Ref: KT107001001AMSD

Addressable Photoelectric Multi Sensor Detector Model No Honeywell NotifierFSP, 951T

Model No.: Honeywell-NotifierFSP/951T

Specifications

SLC LOOP:

- Two-wire SLC loop connection
- Unit uses base for wiring
- Compatible with FlashScan and CLIP protocol systems
- Stable communication technique with noise immunity

ADDRESSING:

- Addressable by device
- Rotary, decimal addressing

(Refer to the NOTIFIER panel manuals for device capacity.)

ARCHITECTURE:

- Sleek, low-...



Scan product



Ref: KTI07001001AHMM

Addressable Monitor Module Honeywell NotifierFMM, 1

Model No.:Honeywell-NotifierFMM/1

Addressable Monitor Module.

Temperature Range: 32°F to 120°F (0°C to 49°C)

Normal Operating Voltage: 15 to 32 VDC

FMM-1

Maximum Current Draw: 5.0 mA (LED on)

EOL Resistance: 47K Ohms

Warranty:- 1 Year



Scan product

Ref: KTI07001001AFSP

Addressable Photoelectric Smoke Detectors Notifier FSP951R

FSP/951R : heat detector Honeywell notifier WITH B-501 : base



SLC LOOP:

- Two-wire SLC loop connection:
- Unit uses base for wiring:
- Compatible with FlashScan and CLIP protocol systems:
- Stable communication technique with noise immunity:

ADDRESSING::

- Addressable by device:
- Rotary, decimal addressing:

(Refer to the NOTIFIER panel manuals for device capacity.):

Walk test...



Scan product



Ref: KT107001001AHLCL

Loop Card Honeywell NotifierLCM 320


Model No.:Honeywell-NotifierLCM-320

Specifications

Voltage: 24 VDC nominal, 27.6 VDC maximum.

Maximum loop length: The maximum wiring distance of an SLC using 12 AWG (3.1 mm²) twisted-pair wire is 12,500 feet (3810 m) per channel. For a twisted-unshielded pair, 12 AWG (3.1 mm²) to 18 AWG (0.78 mm²):

- Distance with 12 AWG: 12,500 ft (3,810 m).
- Distance with 14 AWG: 8,000 ft (...)

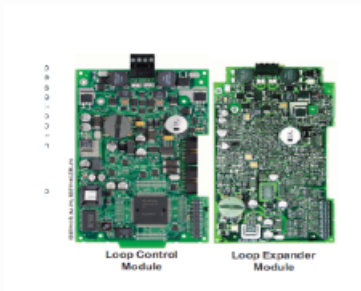

Scan product

Ref: KT107001001AHSS

Digital linear Heat Detector Model No SS LD 68 155

Model No.:Honeywell-System SensorSS-LD-68-155

Digital Linear Heat Detector (68O), UL/FM

ApprovedAddressable monitor module & EOL box required.

Warranty:- 1 Year



Scan product



Ref: KT107001001AMHD

Addressable Rate Of Rise Heat Detector Model No Honeywell Notifier FST, 951R

Model No.:Honeywell-NotifierFST/951R
Addressable Rate Of Rise Heat Detector With Standard
Detector Base

Specifications

ADDRESSING:

- Addressable by device
 - Rotary, decimal addressing
- (Refer to the NOTIFIER panel manuals for device capacity.)

ARCHITECTURE:

- Designed to meet UL 268 7th Edition
- Sleek, low-profile, stylish design
- State-of-the-art thermistor technology for fas...



Scan product

Ref: KT107001001HN1L

Addressable Honeywell Notifier Model No. NFS2 640E

Model No.: Honeywell NotifierNFS2 640E
Intelligent addressable 1 loop fire alarm panel,Expandable
up to 2 loop Each loop supports upto 159 detectors and 159
devicesWithout network card.

80-character remote annunciators (up to 32).

- EIA-485 annunciators, including custom graphics.
- Printer interface (80-column and 40-column printers).
- History file with 800-event capacity in ...



Scan product



Ref: KTI07001001N716P

Manual Pull station Single Action



Painted Die Cast Housing
14 Ga plated steel black plate
Corrosion Inhibited surfaces
Terminal block (4 Position)
Single Gang Mounting
10 A , 120VAC snap Action Switch
Station :Width : 3.200 in, Length : 4.750 in, Depth : 0.875 in
Weight :15.5 oz / 420 grams
Mount :Single gang
Switch : 10A@120VAC



Scan product

Ref: KTI07001001NBG12

Addressable Push Pull type Manual Call Point NBG 12L



Model no.:HoneywellNBG-12LX
Addressable NBG-12L Push Pull type Manual Call Point



Scan product



Ref: KT107001001NORP

Addressable Repeater panel

Model No.: Honeywell-Notifier LCD-160
160 Character Repeater panel with surface mounting box



Scan product