



Product Catalogue

Top Showcase

Top Showcase

KT Automation Private Limited · D 32-33 Kamalanjali Commercial Complex,
Radhakrishna Crossing, Akota · 390020 Vadodara

Ref: KT104021001TOKIJ

Tokimo License Free walkie Talkie 3 Km



License Free walkie Talkie for upto 3 Km Approx

Frequency range :PMR 446

Channel Capacity- 16 Channels

Channel Spacing -12.5KhZ/25 khz

Frequency Stabliity- +-2.5 PPM

Dimension - 111.2X55.8X34.6 Mm

Professional FM Transceiver

Non standard

CTSS /DCS Input

CTSS/DCS Encoding and decoding

Scramber

Scan function

Vox Fnction

3200 mah Battery

Rugged Design

No warranty app...



Scan product

Ref: KT104004002DPASK

RFID Digital Key Management System

Key Management System consisting of key Slot with RFID Key

150W consumption

Finger-300

Features:

1. Built in Browser Application Software
2. Can Create Multiple users, allot keys, adhoc key allotment
3. Verification of the user through Fingerprint
4. Built in MySQL Database
5. IoT Enabled (Can send data to multiple cloud servers, built in API to Receive Data, built in Function...



Scan product




Watch video

Ref: KT104008001GTFV

Guard Patrolling System Real Time Full Version

Checkpoint - QR Generation
Proxy Proof Check via Photo
RFID Tag (NFC Based Mobile Device Needed)
Order of Duty
Fixed Guard Duty
Duty Performed and Duty Missed Reports
Download Logs (Excel)
Notifications
Analytical Reports
Data Retention-1 year
GPS Location of Scan
Incident Management (Text + Image + Audio)-
Guard Safety Check-
Checklist Integration- Chargeable
Works Offline

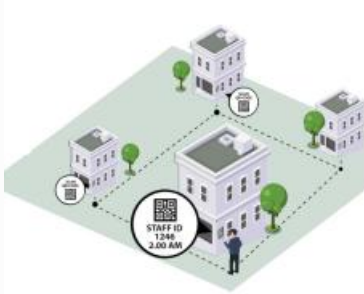

Scan product

Ref: KT102002001KT16

Boom Barrier Without LED 4 to 6 Meter Length KTI

Boom Barrier
Make:- KTI -Zkteco
Model -CMP 200
Length:- Up to 6 Meter
Without LED Model
MANUAL OVERDRIVE, ORIGINAL ALUMINUM
BOOM WITH BOTTOM PVC
TECHNICAL SPECIFICATIONS AS BELOW:
Power supply:220Va.c.±10% 50Hz (*)
Minimum opening time:5.5 s
Boom (aluminum) length:6m max.
Manual manoeuvre:



Watch video



Scan product

Ref: KT102010001PTAL

Portable Tyre Killer Aluminium Alloy 5 Meter

Portable Tyre Killer

Length - 5 Meter

Nail Height: 2.5 Inch Approx.

Total Height: 3 Inch Approx.

Weight: 14 KG Approx.

it is fitted with heavy duty Hook and rope on both sides

The spikes are mounted on mail frame in a systematic way

The main frame is made of flat aluminium stripe which made it corrosion resistant, strong and light in weight for easy portability & long durability...



Watch video



Scan product

Ref: KT104004001DS50

Key Management System Standalone, Single Access 50 Keys

Key Management System

Digital Key box for 50 Keys with

1. Key Hanger With
2. Finger Print + RFID Reader with
3. Electronic EM Lock
4. LED Lights

Display 2.4-inch TFT LCD Color Screen

Fingerprint Capacity 3000

Transaction Capacity 1,00,000

Can be customize for any number of keys



Watch video



Scan product

Ref: KT10401200101PC

KTI Porta Cabin 6X4X8 L*W*H

Porta Cabin

Size : 6 X 4 X 8 ft (L X W X H)

Inside : 1 No - Circular fan , 1 No - led lights , , 5 amp power socket



Scan product

Ref: KT102003001AL16

Aluminium Alloy Retractable Gate 1.6 Meter Height

Retractable Gate'

Material: Aluminium Alloy

Height:1.6 Meter

Length: As per requirement

Power: 370 W

Width: 0.65 Meter

Thickness: 0.9 mm



USP:

Does not Need More space

Stainless steel gate is better looking in comparison to MS gate

Can be installed immediately on delivery



Scan product



[Watch video](#)

Ref: KT1020060SLDNGD

KT1 Sliding Door

Sliding Door

Max Clear Opening 2000 mm Width X 2400 mm Height

Accessories Included: - • Motion Sensor 2 No

- Safety Sensor (One Set)
- 12 mm Thick Glass Panel Holding Bracket 4 No.
- Moving Frame Panel Guiding Floor Bracket 2 No
- Moving Frame- Less Guiding Floor Bracket 2 No Silent

Features: -

- Rail & Cover: - 4.2 Meter Rail & Cover – Maximum Clear Opening 2000 mm In Width X ...



Watch video



Scan product

Ref: KT104004001DS25

Key Management System Standalone, Single Access 25 Keys

Key Management System

Digital Key box for 25 Keys with

1. Key Hanger With
2. Finger Print + RFID Reader with
3. Electronic EM Lock
4. LED Lights



Watch video



Scan product

Ref: KT102008004KJZ03

Mounting stand ZKKJZ03

Mounting stand ZK-KJZ-03

Model: KJZ-03

Material: Steel

Mounting: Vertical (lathe integration)

Dimensions: Height: 414 mm

Compatibility: ZK-PROFACE-X, ZK-SPEEDFACE-V4L, ZK-SPEEDFACE-V5L

Weight: 1.5 kg

Vertical holder for facial recognition devices

For use on turnstiles and Flap barriers

Height of 414 mm

Made of steel

For indoor or outdoor use

Specification

The ZKTeco KJZ-03 Stainless Steel Mounting Pedestal Stand for Face Terminals is the authentic original part — engineered to drop straight into compatible systems. Furthermore, it s...



Scan product

Ref: KT104015002SMVS

Speed Display Board Sereniti Mini VASS AC Operated

SERENITi MINI VASS

SPEED DIGITS -Height: 12 inches, Display: 7 segments

"YOUR SPEED" legend -3.93", spell "YOUR SPEED"

Customizable message

LEDs -Ultra-bright, Green, and Red

LEGILITY -300+m

POWER CONSUMPTION Average



Scan product

Ref: KT102008004F200

Single Lane Flap Barrier FBL200 Zkteco

FBL200 Series

Single Lane Flap Barrier Turnstile

- SUS304 stainless steel casework ensure long-lasting durability.

- High quality electrical components.

Power Requirements - AC100 ~ 120V/200 ~ 240V, 50/60Hz

Working Temperature - -28°C ~ 60°C

Working Humidity -5% ~ 80% (non-condensing)

Working Environment - Indoor/Outdoor (if sheltered)

Max. Speed of Throughput - 30 people per m...



Watch video



Scan product

Ref: KT10200200DBGM400

Boom Barrier Without LED 4 to 6 Meter Length DC motor BGM 400

Boom Barrier

Make:-Zketeco

Model No.: BGM 400

- The fastest operating speed is 1.5s, the speed can be adjusted according to different boom arm length.

- Digital control monitoring, support delay automatic close functions.

- High safety, support power off manually rise boom arm, anti - smash functions.

Model BG300

Operating Speed 1.5-6s

Boom Length Max 4.5m

Boom Type Telescopi...



Scan product

Ref: KT104015001INSC

Serenity CAM Speed display Board with ANPR Camera



SPEED DISPLAY Board with ANPR Camera

SPEED DIGIT Height: 16 inches, Display: 7 Segment

"YOUR SPEED" legend 1.37-inch, spell "YOUR SPEED"

Customizable message

LED's Ultra-bright, 3-row thick, tri-color: Amber, Green, Red

LEGALITY 300+ m

POWER CONSUMPTION Average < 150W

Pole and Pole fixing in client scope

Cloud charges per annum per device will be extra Note:

1. 230V Supply in ...



Scan product

Ref: KT10200200KT600L

KTI Boom Barrier Glass Finish 4 to 6 Meter Length DC motor



Automatic boom barriers are used to control vehicular movement on places where access control is required to ensure that only authorized personnel can access the premises.

An aluminium Bar rises in a vertical arc to allow the movement of vehicles.

BLDC motor is more powerful and requires almost no maintenance. All the operation process is soft without any noise and shaking

Boom...



Scan product

Ref: KT104015002SPED

ADOR TRANQUILITY Speed Radar Display AC Operated



VEHICLE ACTIVATED SPEED SIGN- Speed display Board
Make: Ador
Speed Radar Display System
Speed Digits: Height: 11 Inches, Display : 7 Segment
LEDS : Ultra-bright, 3-row thick, tricolor: amber, green and red
LED Angle: 22 degree cone angle, auto dimming
power consumption: ultra-low power consumption
Doppler Radar: Dual Direction, K- Band, 24.125 Ghz
Accuracy: +/-1 Mph, 99% accur...



Scan product

Ref: KT10401000HXCCD20

3D People Counter HX-CCD20



- 1) Detection Accuracy up to 90% to 95%
- 2) Two-Way People Counting - Support drawing detection frames to detect the number of people entering, exiting, passing, staying, and returning
- 3) Regional People Counting - Support custom drawing of detection areas, accurately counting the number of people in a specified area, and the length of time people stay in a specified area
- 4) Dis...



Scan product

Ref: KT104010001MLCE

Manual Head Count system for Labour contractor and Employes

Size: 3 Feet X 1 Feet

Head Count System -Manual

□ Model no: KTIMHCS4VEC

□ Make: KTI

□ 2 Button For IN and OUT - 4 Digit 2" Character height

□ 4 Digit 7 Segment LCD Display

□ No. Of Digits : 4

□ Display Color : RED

□ for NET 6 Digit and Character height : 4"

□ Must have single ENTRY and EXIT



[Watch video](#)



[Scan product](#)

Ref: KT10401002SAHCS

Semi Automatic Head Count system In Out Net

Model No: KTISAHCS

Features:

1) NET Display = character height 4 inch, colour RED, No of digit 4.

2) IN Display = character height 2 inch, colour RED, No of digit 4.

3) OUT Display = character height 2 inch, colour RED, No of digit 4.

4) Require 5 meter cable for connecting the push button for manual count increase OR decrease.

5) All 3 display is in one body (powder coated)....



[Watch video](#)



[Scan product](#)

Ref: KT118005001KI50

KIOSK 50 inch

1. KIOSK MADE OF MILD STEEL
2. 1.5MM TO 2.0MM THICK METAL IS USED.
3. POWER COATING OF 50 MICRON TO 70MICRON MAX
4. HEIGHT AND WIDTH OF KIOSK WILL BE AS PER PANEL.
5. CASTER WHEELS WITH 02 LOCKABLES



Scan product

Ref: KT10300600ANPSA

ANPR Camera INT21 PNPR1

ANPR Camera
Model No.: INT21-PNPR1
Recognition Camera : Up to 30 Meter
Compression : H.264
Data Protection : AES Encrytion
Deep Learning Based AI Engine
Trained Over 10 Millions Images
Specially Designed for Indian Number Plates
Resolution : 4 MP
IR Range : 20 Meter
Lens: 12 mm Fixed
Frame Rate : 30 FPS



Scan product

Ref: KT101001001VMST

VAMS Corporate Application software.

VAMS Corporate License for VAMS Application software.



Scan product

Ref: KT102010001HT58M

Electro Mechanical Tyre Killer

TYRE KILLER PROVIDES AN ADVANCE OPERATION TO CONTROL ACCESS SMOOTHLY AND EFFECTIVELY BY BASIC OPERATION, AND ALSO PREVENT ILLEGAL IN AND OUT. THE MACHINE IS WELL IN DESIGN, RUSTPROOF, DURABLE AND CAN RESIST EXTERNAL DESTROY. ACCORDING TO DIFFERENT MACHINE CENTERS, INTELLIGENT DRIVE UNIT THROUGH ADVANCED CONTROL UNIT CAN BE DIVIDED INTO FULLYAUTOMATIC AND SEMI-AUTOMATIC. THEIR D...



Watch video



Scan product

Ref: KT102002001HSRD

High Speed Roll Up door

Curtain Details PVC Coated Fabric Make SIOEN (Belgium)

- European make- most innovative & superior PVC Coated Fabrics for High Speed Doors
- Make: SIOEN, Belgium are Both sides Acrylic lacquered & dimensionally stable
- option of high-quality HP Latex Branding
- Cut on fully automated Cutting Machine from ZUND, Switzerland
- High Frequency Welded on FORSSTROM- Swedish make Weld...



Scan product

Ref: KT104023TS6550

X Ray Baggage Scanner 6550 Trust Safety

X-Ray Baggage Scanner
Model: Trust Safety Solutions 6550
(Tunnel Size:-650x500mm)



Features:

- Linux Operation System
- ARM CPU
- Digital signal and processor
- Continuous hard work for 10000 hours
- Energy saving design
- High penetration
- Good quality images
- Automatic Built in Test and Self Diagnosis
- Secure Access Key

Unit weight 420 (kgs)
Product Size 2808.5* 902 * 136...



Scan product

Ref: KT102017TS2000P

Tripod Turnstile TS2000 Plus Zkteco

TS2000 Plus Series

Drop arm tripod turnstile. Improve the turnstile reliability and efficiency.

The durable SUS304 stainless steel housing ensures that the device can be anti-rust. Certified by Salt spray test 72 hours. Waterproof -Passed the self-laboratory test which is equivalent to IPX4 protection rating.

Arm loading

The stainless steel arm has a 38mm diameter of rod. It pr...



Scan product

Ref: KT118005001KIOS

KIOSK

VISITOR MANAGEMENT KIOSK

32 inch MI LED

32 inch IR TOUCH SCREEN

core i5 Processor

Ram 4 GB

HDD 250 GB SSD

KIOSK CABINET

VISITOR MANAGEMENT SOFTWARE

Make: Phoenix Microsystems



Scan product

Ref: KT10401000PVC3DN

V Count People Head Count Sensor

Model : V-Count

Key Features:

- Accuracy of up to 99% and 95 % on average.
 - Plug-and-play installation.
 - Bi-directional counting.
 - An exceptional Mean Time Between Failure (MTBF) of over 20 years.
 - Accurate counting with video evidence.
 - Improved 3D counting accuracy through superior processing power.
 - WiFi connectivity.
 - An optional staff exclusion add-on feature
- Techni...



Scan product

Ref: KT10200800SBTL3

Single Lane Swing Barrier Turnstile SBT300

Reliability

- SUS304 stainless steel casework ensure long-lasting durability.
- High quality electrical components.

Safety Features

- Barriers unlock automatically during power outage.
- All smooth

Power Requirements - AC110V/220V, 50/60HZ

Working Temperature -20°C ~ 70°C

Working Humidity 5% ~ 95%

Infrared Sensor 4 pairs

Working Environment Indoor/Outdoor (if shelter)

Max. Spe...



Scan product

Ref: KT102008004FB70

Single Lane Flap Barrier FBL 700 Zkteco

Model No, : FBL 700

Power Requirements AC100 ~ 120V/200 ~ 240V, 50/60Hz

Working Temperature -28°C ~ 60°C

Working Humidity 5% ~ 80%

Working Environment Indoor/Outdoor

Max. Speed of Throughput 30 people per minute

Lane Width (mm) 600

Dimension (L*W*H) 1200 * 300 * 980 (mm)

LED Indicator Support

Cabinet Material SUS304 Stainless Steel

Lid Material SPCC (with black baking paint)

Ba...



Scan product

Ref: KT10401200108X8

KT1 Porta Cabin 8X6X8 Feet

Porta Cabin

Size : 8 X 6 X 8.6 ft (L X W X H)

(OUT TO OUT)

MAIN MS DOOR : 6 .6 X 3 FT -1 NO ,

AL SLIDING WINDOW 3X3 FT - 2 NO CABIN FAN : 1NO , LED

LIGHT , (15 W) -2 No

Inside : 1 No - Circular fan , 1 No - led lights , , 5 amp power socket

No image



Scan product

Ref: KT104004002KDMS


RFID KTI Digital Key Management System



RFID-Based Electronic Key Management System. Holds keys Securely and Provides Keys to Authorized Personnel Only. The key fob has an RFID tag inside, which Communicates with the cabinet wirelessly. It is Tamper, wear & tear Proof. Each key is attached to a Keyfob enabling the key to have a unique Identity. Woven Around State of Art RFID Technology Holds key Securely Identifi...



Scan product

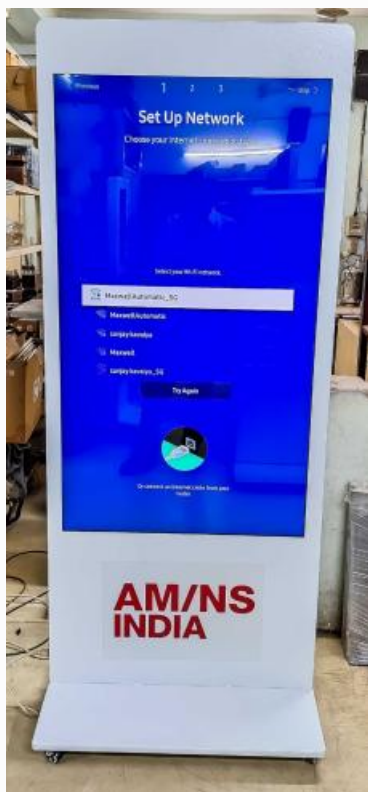

Ref: KT118005001KI55

KIOSK 55 inch

STANDEE MODEL

Model No: DS-SD55P-KSO-A11-BL

Brand & Make: Kiosk India

Standee Type: Floor Standing

Dimensions: 6' Height x 2.5' Width x 2' Base Depth

Weight : 70 KGs

Easily Portable on wheels

Android 11.0 (Red Velvet Cake)

Amlogic S905X3 Quad Core,

Very Fast Processor with support for upto 4K content

RAM: 4GB

Flash memory : 32GB

Penta-Core Mali G31

Ethernet

DualBand Wireless 2....



Scan product

Ref: KT102008004FB52

Single Lane Flap Barrier FBL 520 Zkteco



Model Name -FBL520
Barrier Material -Acrylic
Barrier Movement -Retracting
Cabinet Material -SUS304 Stainless Steel
Dimension (L*W*H) -1360 * 280 * 980 (mm)
Emergency Mode -Support
LED Indicator -Support
Lane Width (mm) -600
Lid Material -SUS304 Stainless Steel
MCBF -2 million
Max. Speed of Throughput -30 people per minute
Opening Noise -≤30dOpening Time -0.8s



Scan product

Ref: KT104023TSH53B

X Ray Baggage Scanner Handy 53B



Single Generator and Single View
Series - Handy 53B
Dimension(LXWXH) - 1664X766X1207
Tunnel Size - 515X 312 MM
Anode Voltage -160 KV
Tube current - 1.2 mA
Wire Resolution -38 AWG
Speed -0.2 Meter per second
Load -165 Kgs
Height from ground 675 mm
Power Requirement 220(± 10%), 50±3Hz



Scan product

Ref: KT102008004FB50

Single Lane Flap Barrier FBL 500 Zkteco



Model Name -FBL500
Barrier Material -Acrylic
Barrier Movement -Retracting
Cabinet Material -SUS304 Stainless Steel
Dimension (L*W*H) -1360 * 280 * 980 (mm)
Emergency Mode -Support
LED Indicator -Support
Lane Width (mm) -600
Lid Material -SUS304 Stainless Steel
MCBF -2 million
Max. Speed of Throughput -30 people per minute
Opening Noise -≤30dOpening Time -0.8s



Scan product

Ref: KT104023TS5030

X Ray Baggage Scanner 5030 Trust Safety



Make:Trust Safety
Model no: Trust Safety Solutions 5030y
Tunnel Size:-500x300mmy
Single Energyy
Features:y
□ Linux Operation Systemy
□ ARM CPUy
□ Digital signal and processory
□ Continuous hard work for 10000 hoursy
□ Energy saving designy
□ High penetrationy
□ Good quality imagesy
□ Automatic Built in Test and Self Diagnosisy
□ Secure Access Keyy
Product Size : 2178* 746 * 116...



Scan product

Ref: KT102008004FB72

Dual Lane Flap Barrier FBL 720 Zkteco

Model No. : FBL 720

Power Requirements AC100 ~ 120V/200 ~ 240V, 50/60Hz

Working Temperature -28°C ~ 60°C

Working Humidity 5% ~ 80%

Working Environment Indoor/Outdoor

Max. Speed of Throughput 30 people per minute

Lane Width (mm) 600

Dimension (L*W*H) 1200 * 300 * 980 (mm)

LED Indicator Support

Cabinet Material SUS304 Stainless Steel

Lid Material SPCC (with black baking paint)

Ba...



Scan product

Ref: KT102008004SATU

Single Lane Saturn 1000

Model : Saturn -1000

Visual Indicator -Steady Green

Visual Indicator

Top LED indicator:

Blue = Door closed / stand by

Green = Door opening

Red = Door closing / alarm

Lane Type

Saturn-S1000: Single lane

Lane Width-650mm (Standard)

Barrier Movement Type-Swing

Motor- DC brushless motor

Movement Speed -Average 1s per movement (Adjustable open/close timing)

Door leaf Material :...



Scan product

Ref: KT10200800SAT12

Single Lane Saturn S1200

Dual Swing(for additional lane)
650mm (Standard)
Motor DC brushless motor
Movement Speed -Average 1s per movement (Adjustable open/close timing)
Lid Material -Polycarbonate+2.5D tempered glass
Power Supply -110V / 220V $\pm 10\%$ AC @50Hz/60Hz
Noise Level -Less than 60dB
MTTR-Less than 60 minutes
MCBF -3 Million



Scan product

Ref: KT104023TS6650

X Ray Baggage Scanner 6650 Magtech

Dimensions (in mm) -2020 L X 915 W X 1406 H
Gross Weight -590 KGS
Tunnel Size (in mm) -665(W) x 508(H)
Anode Voltage -160 KV
Tube Current -1.2 mA
Steel Penetration -35 mm
Wire Resolution -38 AWG
Speed -0.2 meter per second
Recognition Types -Recognizes 35 types of objects: gun, explosive fireworks, container spray, knife, impenetrable materials, axe, scissors, ignition oil, n...



Scan product

Ref: KT102001001BGHB

BGI K4 Crash Rated Hydraulic Bollard

BGI K4 Crash Rated Hydraulic Bollard

Model no.B3150

Accessories : Including control panel, Push button
,photosensor for humansafety,High Range Reciver,
High Range Remote Control,Loop detector



Drive Hydraulic
Cylinder Diameter 220 mm
Cylinder Length 700 mm
Rating K4 Rating
Cylinder Material ST 37
Special Stainless Steel cover SS 304
Cylinder Surface Treatment Hot Dip galvanized...



Scan product

Ref: KT102001001MCHB

Hydraulic Bollard KTI K4 Rating

Make: Mcvick

Rating: 4k

Bollard Height: 600-1200 Mm

Bollard Diameter: 220 -273 Mm

Dimension Outdoor Finish:1600*1200*600

Wheel Load: 100 Kn

Load Impact:approx. 100 Kn

Vertical Load: 100 Kn Vertically(20 T)

Operation Time: Raising 4-6 Sec & Lowering 4-5 Sec

Operating Panel:from Both Side of Bollard Through Push
Button With Key Switch Control and From Remote Control
Upto 10 Meter...



Scan product



[Watch video](#)

Ref: KT10200200KGV6

Godrej Boom Barrier Without LED 6 Meter Length DC motor GVB6

Model No. GVB6

- Housing Thickness: 1.5 mm thickness for higher strength and reliability
- Inbuilt anti crash safety feature
- Better Visibility: White aluminum boom bar with reflective strips and Dark Gray powder coated housing
- IP54 Protection: Control unit is IP - protected making it dust and water resistant
- Optical Beam Sensor: Safety device to detect presence of vehicle...



Scan product

Ref: KT102004001MCRB

Hydraulic Rising Road Blocker

Make:- Mcvick

Length:- 4 Meter

Raise Height:- From 250 mm to 1250 mm

Length:- From 500 mm to 8000 mm

Environmental Condition:- -20 C to +75 C

Typical Raise/ Lower time is 3 Seconds

In case of emergency raise/ Lower time can be as low as 1.5

Seconds with the help of Programmable Logic Control

Typical Weight of a road blocker is 2 to 2.5 ton(Depending on Road Blocker Type)



Scan product

Ref: KT102004002MCRB

BGI K12 Crash Rated Road Blocker 4 Mtr

BGI K12 Crash Rated Road Blocker - 4 Mtr

Model no.R2000

Company Certifications ISO 9001-2015

Mechanism Electro - Hydraulic

Blocking Height 600-900mm

Blocking Width 6 Mtr (Customized)

Safety Protection Photo Sensor & Loop Detector

Protection Class IP66 for Control Panel Enclosure

Housing Galvanised Mild Steel Body

Integration Integration with the Bollard & Other access control P...



Scan product

Ref: KT102008004FESD

Single Lane Flap barrier with ESD Access Control

Flap Barrier (Left & Right Single Core - 1 Nos)

1. Size:1200*300*980mm

2. Lane width:600mm

3. Power supply: 100-240V 50/60Hz

4. Full height mechanism with DC motor

5. Communication: RS485/RS232

6. Material : SUS304

7. Acrylic Flap with LED



Face Id

1. Processor: RK3568

2. Operating system: Android11.0

3. Face display: 8 inches with capacitive touch

4. Tester: 3-color status l...



Scan product

Ref: KT102008SBTL500

Single Lane Swing Barrier Turnstile SBTL500

Single Lane Swing Barrier Turnstile SBTL500

Model: SBTL500

Power Requirements: AC100 ~ 120V / 200 ~ 240V, 50/60Hz

Working Temperature: -20°C ~ 70°C

Working Humidity: 5% ~ 90% (non-condensing)

Working Environment: Indoor/Outdoor (if sheltered)

Max. Speed of Throughput: 30 people per minute

Lane Width (mm): 650

Dimension (L×W×H): 1360 × 280 × 980 (mm)

LED Indicator: Support

Cabin...

Specification

SBTL300 series and associated access control readers are all factory-tested prior to shipping.

Provides true plug & play turnstiles with the lowest possible total cost of ownership...



Scan product

Ref: KT102008SBTL520

Single Lane Swing Barrier Turnstile SBTL520

Model: SBTL520

Power Requirements: AC100 ~ 120V / 200 ~ 240V, 50/60Hz

Working Temperature: -20°C ~ 70°C

Working Humidity: 5% ~ 90% (non-condensing)

Working Environment: Indoor/Outdoor (if sheltered)

Max. Speed of Throughput: 30 people per minute

Lane Width (mm): 650

Dimension (L×W×H): 1360 × 280 × 980 (mm)

LED Indicator: Support

Cabinet Material: SUS304 Stainless Steel

Lid Mate...

Specification

The SBTL520 Series is a single-lane swing barrier turnstile designed for smooth, silent operation and low power consumption. Built from stainless steel, it ensures high durability ...



Scan product

Ref: KT102008SBTL700

Single Lane Swing Barrier Turnstile SBTL700

Single Lane Swing Barrier Turnstile SBTL700

Input Voltage: AC100V to 120V / 200V to 240V, 50 Hz to 60Hz

Working Temperature: -10°C to 70°C

Working Humidity: 5% to 90% (Non-condensing)

Working Environment: Indoor

IR Sensor: 6 pairs

Max. Speed of Throughput: 30 people per minute

Lane Width (mm): 650


Dimension (L×W×H): 1200 × 150 × 980 (mm)

LED Indicator: Support

Cabinet Material:...

Specification

The single-lane swing barrier turnstile designed for smooth, silent operation and low power consumption. Built from stainless steel, it ensures high durability and long-lasting per...

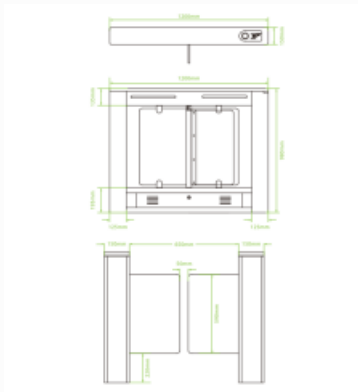

Scan product

Ref: KT102008TSSG250

Technospacio Speed Barrier Gate TSSG250

Technospacio Speed Barrier Gate TS-SG-250

Brand Name: TECHNOSPACIO

Model Name: TS-SG-250

Dimensions: 600 × 130 × 980 mm

Material Thickness: SUS304 / SUS316 (Optional), T = 1.5 mm

Passage Width: 600-900 mm

Passage Indicator: Soft LED indicator light on top + Door

RGB 3-color welcome lamp

Operating Environment: Indoor/Outdoor (Covered)

Power Rate: 60 W

Power Supply: AC 110-220 V,...

Specification

The TS-SG-250 Speed Gate is a premium, waist-high pedestrian access control solution designed for secure, fast, and efficient entry management. Featuring high-speed glass barrier p...



Scan product

Ref: KT102008TSSG400

Technospacio Speed Barrier Gate TSSG400

Technospacio Speed Barrier Gate TS-SG-400

Brand Name: TECHNOSPACIO

Model Name: TS-SG-400

Dimensions: 1400 × 120 × 980 mm

Material Thickness: SUS 304 + Side Glass Panel + Acrylic Lid

Passage Width: 600-900 mm

Passage Indicator: Soft LED indicator light on top + Door

RGB 3-color welcome lamp

Operating Environment: Indoor/Outdoor (Covered)

Power Rate: 60 W

Power Supply: AC 110-220...



Specification

The TS-SG-400 Speed Gate is a premium, waist-high pedestrian access control solution designed for secure, fast, and efficient entry management. Featuring high-speed glass barrier p...



Scan product

Ref: KT102008TTSF300

Technospacio Flap Barrier Turnstile TSF300

Technospacio Flap Barrier Turnstile TS -F-300

Brand Name: TECHNOSPACIO

Model Name: TS-F-300

Dimensions: 1200 × 160 × 980 mm

Cabinet Material: 304 Stainless Steel

Material Thickness: Top cover 1.2 mm + Body 0.8 mm

Passage Width: 600 mm

Passage Indicator: Soft LED indicator light on top + Door

RGB 3-color welcome lamp

Operating Environment: Indoor/Outdoor (Covered)

Power Rate: 40...



Specification

The Technospacio Flap Turnstile-300 series are robust products functioning to provide pedestrian access control in areas requiring moderate level of security. With its compact case...



Scan product

Ref: KT10200MARSS100

Single Lane Swing Barrier Turnstile MarsS100

Single Lane Swing Barrier Turnstile Mars-S100
TECHNICAL SPECIFICATIONS



Model: Mars-S100

Visual Indicator: Steady Green = Normal Use, Steady Red = Door Closed

Audio Indicator: Internal Buzzer

Lane Type: Single Lane

Lane Width: 660 mm (Optional: 900 mm)

Barrier Movement Type: Swing

Motor: DC Brushless Motor

Movement Speed: 0.8 s per Movement (Open/Close Timing)

Movement Accuracy: ± 2 D...

Specification

Additionally, this compact speed gate can integrate with access control system. Upon a valid verification of user's credentials (Fingerprint / Face / Palm / RFID Card / QR code), t...



Scan product

Ref: KT10201703MK1SS

Full Height Single Lane Turnstile SS

For Unmanned Entrances With High Security , User-friendly and Robust Construction Makes Full Height Turnstile Suitable for High Through Put Security Applications

Body Type: SS , Rotor Body : SS

1. Application Areas /users: Government/finance/it/oil Refineries / Nuclear Plants Ordnance Depots / Etc.
2. Design : Robust Design at Affordable Price.
3. Available in Single and Dual ...



Scan product

Ref: KT10201703MKIIS

Full Height Dual Lane Turnstile SS

Model No.: MK-II-S

stainless steel frame & Top Box SS

1. Application Areas /users: Government/finance/it/oil Refineries / Nuclear Plants Ordnance Depots / Etc.
2. Design : Robust Design at Affordable Price.
3. Available in Single and Dual Walkway.
4. Stainless Steel Frame and Stainless Steel Rotor.
5. Drive: Electro Mechanical Hand Operated (Optional Motorized)
6. Ce Certified ...



Scan product

Ref: KT10201703SMKII

Full Height Dual Lane Turnstile

1. Application Areas /users: Government/finance/it/oil Refineries / Nuclear Plants Ordnance Depots / Etc.
2. Design : Robust Design at Affordable Price.
3. Available in Single and Dual Walkway.
4. Stainless Steel Frame and Stainless Steel Rotor.
5. Drive: Electro Mechanical Hand Operated (Optional Motorized)
6. Ce Certified Against Electrical & Emc Safety.
7. Rotor: 4 X 90 Degr...



Scan product

Ref: KT10201703TSIVA

Slim Tripod Turnstile Sivananda Make

Solenoid locking mechanism
3 X 120 degree stop
Bi-directional operational Control
Self centering mechanism with hydraulic damping
Positive action lock to prevent two passage at one time.
Integration: With all type of access control panel/Reader available in the market
CE Certified against Electrical & EMC Safety
Casework available in Mild steel Powder coated OR Stainless...



Scan product

Ref: KT104004003KDWG

RFID Digital Key Management System with Genetec Integration

RFID-Based Electronic Key Management System with 7" Screen Size
Secure, Traceable, and Intelligent Key Management System
Automatic Sync of Card User and System User Data to KMS
Access through exit readers is automatically restricted when sensitive keys are withdrawn from the KMS, ensuring enhanced security control.
Automatically grant or restrict access to specific facility zon...



Scan product

Ref: KT10401000FP221

TOF People Counter FP221

Using TOF technology, it does not rely on visible light images, and directly obtains the depth map and grayscale map of the object instead of the RGB image, which can 100% protect the privacy of personnel; 2. Through specific tags, employees can be accurately filtered, support custom height cutoff points, distinguish between adults and children, and count them separately (HSN N...



Scan product

Ref: KT104023T6550A

X Ray Baggage Scanner 6550A Dual Energy Zkteco

X Ray Baggage Scanner 6550A Dual Energy Zkteco

Specification:

Tunnel Size W660mm × H510mm

Speed 0.20 m/s

Height of Transmission Belt 1300 mm

Maximum Load ≤180 kg (Adequate distribution)

Wire Resolution 40 AWG (0.0787mm metal wire)

Space Definition Horizontal Φ1.0mm \ Vertical Φ2.0mm

Penetrate Definition 34 AWG

Penetration 38mm Steel board

Monitor 22 inch LED

System Function

...

Specification

ZKX6550 uses reliable high quality dual energy X-ray generator. With the superb image algorithm, ZKX6550 could offer clear scanning image, which allows operators to identify pot...



Scan product

Ref: KT104023TSH100

X Ray Baggage Scanner 100100 Zkteco Dual Energy

X Ray Baggage Scanner 100100 Zkteco Dual Energy

Specification:

Tunnel Size(W*H) 1000*1000(mm)

Speed 0.2-0.4m/s (adjustable)

Height of Transmission Belt 387 mm

Maximum Load 200 kg (Adequate distribution)

Wire Resolution 38 AWG

Space De nition Horizontal $\Phi 1.0\text{mm}$ \ Vertical $\Phi 2.0\text{mm}$

Penetrate De nition 32 AWG

Penetration 30 mm steel board

Monitor 21.5 inch LED * 2

System Function

H...



Specification

ZKX100100 X-ray inspection system increases the operator's ability to identify potential threats; the device is designed to scan the objects up to a size of 100 × 100cm.



Scan product

Ref: KT118005001KI2S

Floor Standing KIOSK

Dimensions: 4' Height x 2.5' Width x 1.5' Depth

Easily Portable on wheels

MS body made of 1.6mm thick Sheet

CNC LASER cut & CNC Bending

Powder Coating :White (texture) / Offwhite / Silver/ Siemens

Grey / RAL 7032 /RAL 7035 / Dark Grey

Maintenance Door Back side Access

Inbuilt 6A Power Plug Sockets

Castor Wheels with brakes

VIEWSONIC TOUCHSCREEN DISPLAY

32" Screen Size with

27" ...



Scan product