





Product Catalogue

Automation

Automation

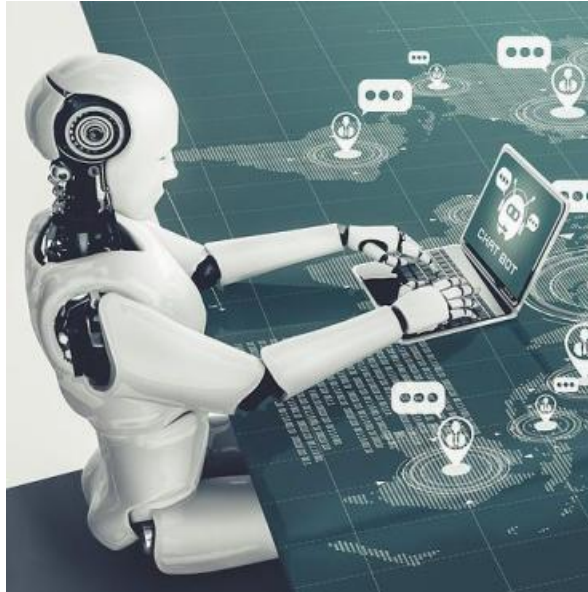

KT Automation Private Limited · D 32-33 Kamalanjali Commercial Complex,
Radhakrishna Crossing, Akota · 390020 Vadodara



Ref: KT104007001PHSW

Safety Photosensor

Safety Photosensor For Multiple Uses.
With NO,NC Facility
Power : 12V DC.



Scan product


Ref: KT190006001PB3S

Push Button 3 Switch Set Green, Blue, Red Normally Open

Push Button Set With Three Switches (Green + Yellow + Red)
used for Manual Operation as and when required
* Color Combination Can Be Changed on Request.
* NO/NC Combination Can Be Changed on Request.
* Push Button Size and Appearance Subject to Change
Without Prior Notice.
Warranty:- Not Applicable



Scan product



Ref: KT101006002SSE2

Exit Switch SS 2 wire

S S Exit Switch
S S Body



Scan product

Ref: KT101002003NF22

Face,Finger, Card, Password Based Reader NF22

Visible Light Indoor Facial Recognition

Face Capacity 1500

Palm Capacity : 500

Finger Capacity : 5000

Mifare Card Capacity : 1500

Max. User : 1500

Log Capacity : 200000

Communication Interface : Wi-Fi, TCP/IP, US

RF card options


Access control :

Exit Reader : N-FR12, Wiegand Reader, Push Button, No
Touch , Bell

Dimension : 185 x 72 x 25 mm



Scan product



Ref: KT10401200WNSK1

1 Key Wireless Call Button

1 Key Wireless Call Button

1 Key Function

Matt Finish

12 V 23 A Battery,



Scan product

Ref: KT10401200WCBHS

Wireless Call Button Holder Stand

Holder for Wireless Call Button


Material: 2mm thick milky white acrylic.

Dimensions: 4 inches high (h) by 2.5 inches wide (w).

Includes two 4mm holes.



Scan product



Ref: KT102002001BOO6

Boom for Boom Barrier 6 Meter

Boom for Boom Barrier
Size: 6 Meter



Scan product

Ref: KT102002001LPDT

Loop Detector


Loop Detector used In Exit for Automatic Exit
1.5 sq mm Cable to Be Used to for Automatic Gate Open in
Exit or Entry
Loop Created Under the Ground



Operating voltage- 220V AC $\pm 10\%$
Power Consumption:- $\leq 5\text{VA}$
Output Relays:- 240V/5A AC
Frequency Range:- 20 kHz to 170 kHz
Reaction Time:- 10ms
Loop Connection Wiring:- Maximum Length 20 Meters
Twisted at Least 20 Times Per Meter
Ope...



Scan product



Ref: KT102002001RTSW

Remote for Boom Barrier

Remote For Boom Barrier
Can Operate From Approx 5-7 Meter Distance



Scan product


Ref: KT190006001PB2S

Push Button 2 Switch Set Green, Red

- * Push Button Set With Two Switches (Green + Red)
 - * Color Combination Can Be Changed on Request.
 - * NO/NC Combination Can Be Changed on Request.
 - * Push Button Size and Appearance Subject to Change Without Prior Notice.
- Warranty:- Not Applicable



Scan product



Ref: KT102002001RSPL

Resting Pole For Boom Barrier

Resting Pole For Boom Barrier



Scan product


Ref: KT1010050011DCB

1 Door Controller For Boom Barrier

1 Door Controller For Boom Barrier designed to provide reliable and efficient control over the movement of the boom arm, ensuring smooth and safe passage for vehicles. Enable or Disable any Tag with 1 door controller for restriction to vehicles entering designated area.



Scan product



Ref: KT11400400GR50

Garden Rock Speaker 50

FEATURES

Rock - 50 JNM Garden Speaker

- * Outdoor Weather Proof Speaker
- * Aluminum Grille
- * Woofer: 6.5 inches
- * Tweeter: 1/2 inch
- * Power Handling: 15/30 Watts on 100v
- * Frequency Response: 100 -20 Khz
- * Sensitivity: 88 $\pm$ 3 dB
- * Dimensions (mm): 256*300*270
- * Glass fiber re-inforced plastic
- * Do not connect on 8 ohms
- * Amplifier. Please connect on
- * 100v amplifier



Specification

Rock - 50 JNM Garden Speaker, Woofer: 6.5 inches, 100v amplifier



Scan product

Ref: KT110008002IN2F

Insect Killer MS Powder Coated Model 2 Feet

Material: MS Powder Coated

Size: 25 " (L) X 7 " (B) X 18" (H)

Tube: 18w Actinic BL UVA Lamp (Philips / Osram)

Choke / Driver: 20W Electronics UV Chock (For Individual Tube)


Electrical Rating: 230 v AC/ 50 HZ

Pest Control Type Mosquitoes, Insects, Flies

Usage/Application Hotels, Hospitals, Restaurants, Malls, Bakeries, Dairy, Food Junctions, Kitchens, Offices



Scan product



Ref: KT10401200WKNK2S

2 key Button K2

Model No.K2

2Key , Call/Cancel)

Wireless and very easy to install system.

2 key Functions: Call, Cancel.

Strong Signal strength upto 100 mts.

23A-12V battery ensures long life.

Working voltage: DC12V

Working current: 10mA

Use Frequency: 433.92mhz

Size Dimensions: 60*60*22mm.



Scan product

Ref: KT114004007PS3T

PA Wall Speaker AHUJA PS 300TM

PS-300TM

2-Way Compact PA Wall Speaker

High fidelity 2-Way, 100V multi-purpose PA wall speaker.

100V, Power taps of 6W, 3W & 1.5W

Facility to use as 8 ohms Low Impedance Speaker available.

Power taps can be selected

through the rotary switch.

Movable mounting bracket supplied, can be mounted in


vertical or horizontal positions.

Power Rating 10W RMS / 15W Max.

Rated Voltage100V...



Scan product



Ref: KT190006001CNTR

Controller For Boom Barrier

Controller For Boom Barrier

(Image for representative purposes only, controller subject to change, based on boom barrier make and model).



Scan product

Ref: KT10400100TMHDB

LED Temperature Humidity Display Board

Size : 2 Feet X 2 Feet

Red color

Ch. height 12"

Mounting Type - Wall Mounting and Hanging Brackets

LED Temperature and Humidity Display board


* Usage/Application - Industrial

* Supply - 90-260VAC

* Power Type - AC



Scan product



Ref: KT1140040074025

Flameproof Horn Speaker ATS 4025 IIC



Flameproof Weatherproof Horn Loud Speaker

Rated wattage: 30 watts

Rated voltage: 15.5 Volts

Rated SPL at 1 khz, 15 watts at 1 mtr : 117 db

Effective freq response: 500 Hz to 5500 Hz (typical)

Dimension: 445mm (length) X 280mm (height)

Colour: Orange

SS bracket

Climatic

Temperature class : T6

Relative humidity : 95 %

IP protection : IP 65

Material

Flameproof unit cast Aluminium...



Scan product

Ref: KT101002003MB50

Face,Finger, Card, Password Based Reader Multibio - 500



Multibio - 500

Face Capacity 1,500

Finger Capacity 5,000

Palm Capacity -500'

Card Capacity -2000

Log Capacity -2,00,000

Max User- 2000

Speedy recognition to avoid long queue

Large display with easy handling features

Dual camera for live body sensing & observation


Camera support low light and normal light

Auto ON/OFF Energy saving light

Visible Light Indoor Facial Recognition Vi...



Scan product



Ref: KT110008002IN1F

Insect Killer MS Powder Coated Model 1 Feet

Material : MS Powder Coated

Size : 12.6 " (L) X 11.4" (B) X 6.1"(H)

Pest Control Type Mosquitoes, Insects, Flies

Usage/Application Hotels, Hospitals, Restaurants, Malls, Bakeries, Dairy, Food Junctions, Kitchens, Offices

Tube : 8 W UVA Lamp

Automation Grade Automatic

Number of Tubes 2 UV Light

Warranty 1 Year

Area Covered (Square Feet) 100-150 Sq. Ft



Scan product

Ref: KT1120060BENPS

BENQ SHORT THROW PROJECTOR

BENQ SHORT THROW
PROJECTOR


XGA, 3600 lumens

VGA + HDMI

Warranty : 2 year



Scan product



Ref: KT101003001DR03

Interlocking System 3 Door - ESSL with out memory



Microcontroller Based Design

EMG: Emergency switch

SW1, SW2, SW3: Switch /Reader - Door 3, Door2, Door 1

Ideal for Pharma / Clean Room Applications



Scan product

Ref: KT104001001ACCF

Safety LED Display Board Accident Free Days 4 x 2.5 Feet

Size: 4 Feet X 2.5 Feet


Pixle Pitch-P10

Connectivity : Lan and Mobile

Color -Red



Scan product



Ref: KT1040120SLT1XBK

1 button, Cancel only black, Water resistant IPX8



1 button, Cancel only black, Water resistant (IP-X8)
Excellent Performance and Reliability
Attractive compact design
Quiet Operations for Call and Response
Easy Installation and Use
Water Proof
Battery life 18-24 Months



Scan product

Ref: KT114004005DFPM

ERTL Approved Flameproof Portable Megaphone 15W



Technical Specification
SPL 110dB/15W/1m
Input Power: 15WRMS
Frequency Response: 250-10000 Hz

Enclosure and ElectroMechanical Arrangement
Ex d as per IS/IEC 60079-1: 2007 Gas Group: IIA, IIB & IIC for Zone 1 & 2

- Temperature Class T6 as per IS/IEC60079-0:2004
- Ingress IP Protection: IP66 IS/IEC60529-1:2001
- Material of construction: Cast Aluminium Alloy LM6
- Colour: PO Red


...



Scan product



[Watch video](#)



Ref: KT102008004KJZ03

Mounting stand ZKKJZ03

Mounting stand ZK-KJZ-03

Model: KJZ-03

Material: Steel

Mounting: Vertical (lathe integration)

Dimensions: Height: 414 mm

Compatibility: ZK-PROFACE-X, ZK-SPEEDFACE-V4L, ZK-SPEEDFACE-V5L

Weight: 1.5 kg

Vertical holder for facial recognition devices

For use on turnstiles and Flap barriers

Height of 414 mm

Made of steel

For indoor or outdoor use

Specification

The ZKTeco KJZ-03 Stainless Steel Mounting Pedestal Stand for Face Terminals is the authentic original part — engineered to drop straight into compatible systems. Furthermore, it s...



Scan product

Ref: KT11000700D0045

Air Blade Jet Hand Dryer Dolphy

Air Blade Jet Hand Dryer

DAHD0045

Touch Free Infra-Red Activation

High Grade ABS

Model No.

Material

Power 1000W

Voltage AC220-240V, 50Hz

Operation -Touch Free Infra-Red Activation

Auto Cut off -60 Sec

Speed -25000 RPM

Noise Level -60-80 Db

Air Speed -90m/s

Drying time -12-15 sec


Motot - Brush Motor

Blowing volume 150 m3/h

Waterproof- IPX1



Scan product



Ref: KT102002001LMSW

Limit Switch For Boom Barrier

Limit Switch For Boom Barrier.

Warranty:- Not Applicable



Scan product

Ref: KT10100400DG706

Digital Lock Dorset DG706 GM

Dorset Digital Lock

Model No.: DG-706 GM

FEATURES

Glass Door Digital Lock

- Unlocking Method: Finger, Card, Pin, Key, App
 - Finger, Card, Pin: 100 Unique access
 - Glass to Glass Bracket (optional)
 - Compatible with Glass Sliding & Swing Doors
 - Door Thickness: up to 14mm
- Utility Usages : Villas, Apartments, Commercial or Government Offices, Hotels, Resorts.


Specification

Glass Door Digital Lock

- Unlocking Method: Finger, Card, Pin, Key, App
- Finger, Card, Pin: 100 Unique access
- Glass to Glass Bracket (optional)
- Compatible with Glass Sliding &...



Scan product



Ref: KT10200200DBGM400

Boom Barrier Without LED 4 to 6 Meter Length DC motor BGM 400

Boom Barrier

Make:-Zketeco

Model No.: BGM 400

- The fastest operating speed is 1.5s, the speed can be adjusted according to different boom arm length.
- Digital control monitoring, support delay automatic close functions.
- High safety, support power off manually rise boom arm, anti - smash functions.

Model BG300

Operating Speed 1.5-6s

Boom Length Max 4.5m

Boom Type Telescopi...



Scan product

Ref: KT10400700DPMLS


Magnetic Limit Switch Ditec

Magnetic Limit Switch

Group6CS14FM



Scan product



Ref: KT10400700DSSL5

Sliding Shoe for Magnetic Limit Switch Ditec

Sliding Shoe for Magnetic Limit Switch
NC6CS230PFM



Scan product

Ref: KT10200200KT600L

KTi Boom Barrier Glass Finish 4 to 6 Meter Length DC motor


Automatic boom barriers are used to control vehicular movement on places where access control is required to ensure that only authorized personnel can access the premises.

An aluminium Bar rises in a vertical arc to allow the movement of vehicles.

BLDC motor is more powerful and requires almost no maintenance. All the operation process is soft without any noise and shaking
Boom...



Scan product



Ref: KT10401200WK34S

Wireless Led Display K34S

Model No.:K-34-S

Working Voltage : DC 12V 1A

Modulation : AM

Pairing Capacity : 250 Transmitters

Call Displayed : 3 Group

Call Capacity : 32

Frequency : 433.92 MHz

Digits Displayed : 4 (0000-FFFF)

Wireless Led Display With Power supply- (4 Digit Three Group)

30 Call Waiting.

Size Dimensions : 295x170x60mm



Scan product

Ref: KT1000000EH270N

High Speed Dryer EH270N

Casing :Stainless Steel #304 Grade

Mounting :Wall Mounted

Operation :Automatic

Sensor Rang-12 cm – 15 cm

Hand Dry Time :Less than 30 secs

Auto Cutoff :60 seconds

Motor :Brush AC Type

Speed :30,000 RPM

Rated Power :1000 W (Motor 500 W + 500 W Element)

Protection Class:IPX3

Blowing Volume :> 270 m3/h


Air Speed :100 m/s

FeaturesSAVE ELECTRICITY

80% Energy saving vs
conventional ...



Scan product



Ref: KT104001001ADTG

Count down Display Board

LED Display Board Size: 6 Inch X 1 Feet
With an Increment of One per Day
Indoor
Red Color
with 1 Reset Button



Scan product


Ref: KT114004007UH30

Horn Speaker Ahuja UHC 30

Input Power: 30w RMS
Frequency Response: 240- 10,000Hz
Weight: 1.98 kg



Scan product



Ref: KT101002003MUGN

Face ,Fingerprint, Card Without battery AIFace Magnum

Model No. : AIFace-Magnum
FaceCapacity:1500
FingerprintCapacity:5000
CardCapacity:10,000
TransacΘonCapacity:200,000
Display:2.4-inchtouchScreen
FacialRecogniΘonAlgorithm:eSSLFace3.5
FacialRecogniΘonSpeed:



Scan product

Ref: KT104001001TDGU

Token Display Led Disply Guj Language


led diplay
Color: Black
4 inch Character size
Dimensions: 13 Inches X 8 Inches X 2 Inches(approx)
Wattage: 50 Watts
Package Contents: 1 Token Display, 1 Token Control Unit, 1
Power Supply Adapter, 3 Meter Cat5 Sample Cable
* Available language gujarati



Scan product



Watch video



Ref: KT10100400FEM60

Flameproof EM Lock 600LBS



Flameproof EM Lock 600 LBS
Voltage Tolerance -15%
Voltage Input -12/24V DC
Current Draw 480mA At 12V DC , 240mA At 24 DC
Magnetic Contact for door status (No type)
Holding force -600 LBS (272 KGS)
Opetating Temperature -0-55 Degree C
Anti Rust Surfacer treatment
Dimension -275LX63WX42T



Scan product

Ref: KT10400100TTMHD


LED Temperature Humidity Display with 2.5 Feet X 9 Inch



LED Room Temperature & Humidity Display b Red High
Bright
Single Sided
Indoor
Model No : 12
Cabinet Size : 300 mm(H) X 850 mm(W) X 90 mr Digit Size:
140mm High
Inbuilt Sensor
Industrial / Dust Resistance
Titles by vinyl sticker
2 mm Front Lexan Polycarbonate Sheet You can set the
value via Button
Industrial / Dust Resistance
(°C & % in Permanent Sticker) Fixing Clamp Provided ...



Scan product



Ref: KT11400400UH30T

Horn Speaker Ahuja UHC 30XT

Power Output: 30W RMS / 45W Max
Input Voltage / Line: 100V with built-in matching transformer
Impedance Taps: Multiple selectable taps (330Ω, 400Ω, 500Ω, 670Ω, 1kΩ, 2kΩ) via a rear rotary switch
Frequency Response: 240 – 10,000 Hz
Sound Pressure Level (SPL): 108 dB (1W/1m) / 123 dB (30W/1m)



Scan product


Ref: KT104007001PHSP

Safety Photosensor Premium

Safety Photosensor For Multiple Uses.
Range : 18 to 22 Mtr
With NO,NC Facility
Power : 12V DC.



Scan product



Ref: KT10401200WK10W

Monitor Panel signage

MODEL NO- K10WMD

Size 260 x 170 x 22 mm

Screen size 10.1

Resolution 1280 x 800 Px

OS Anroid 10.0

Memory 1GB RAM

Built-in-Speaker 2 X W

Stand Table top stand

Support Horizontal/Vertical

Interface WiFi / Bluetooth



Scan product

Ref: KT10401200WKRXW

Wireless Receiver Module WiFi

MODEL NO- KRX (WIFI)

Size 175 x 95 x 30 mm

Interface RF/ WiF

Working Voltage DC 12V 1A

Call capacity 250 Transmitters


Digit Display 001-999

Body type ABS Plastic

RF frequency 433.92 MHz




Scan product



Ref: KT110008002FCGP

Gum Pad Sheet for Fly Catcher

Gum Pad Sheet
1 Packet - 15 nos. (sheets)

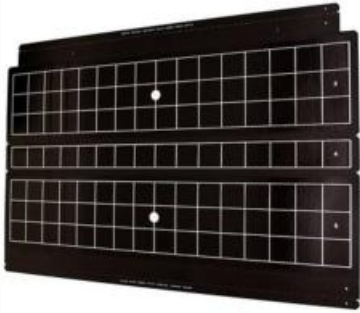

Scan product

Ref: KT114002001SSA1


Power Amplifier Ahuja SSB 120DP

Model No. " SSB-120 DP
120 Watts Amplifier
5 Mic & 2 Aux Inputs
Power Output -120W RMS at 10% THD/160W RMS Max.
Input Channels -5X MIC 0.65 MV/4.7K Ohm X2 Aux 100mv

No image



Scan product



Ref: KT10400100TMHD1

LED Temperature Humidity Display Board 2 feet X 1 Feet

Size : 2 Feet X 1 Feet

Red color

Ch. height 6"

Mounting Type - Wall Mounting and Hanging Brackets

LED Temperature and Humidity Display board

* Usage/Application - Industrial

* Supply - 90-260VAC

* Power Type - AC

No image



Scan product

Ref: KT11200600TIWF65

Samsung INTERACTIVE FLAT PANEL 65 WAF

Samsung WA65F Series: As an Android 14-based product

Key Features

Display Size & Type: 65" UHD Interactive Large Format Display

Resolution: 3840 x 2160 (4K UHD) for sharp, vibrant visuals

Operation Time: 16/7 continuous usage for business and educational settings

Touch Capability: Smooth and accurate multi-touch input for collaboration and presentations

Connectivity: HDMI, ...

Specification

Key features


Powered by Android™ and EDLA Certification

The WAF series, powered by Android OS, offers a familiar and customizable environment. Google EDLA certification promotes in...



Scan product





Ref: KT10400100TMHTT

Temprature LED Display Board

Temperature Display Board
Size: 4"Character Height
Indoor
Size 7.5 inch(H) x 13 inch(L)
Power Supply : 230 V AC



Scan product


Ref: KT190006001PB1S

Push Button Single

- * Push Button Set With One Switches (Green Or Red)
- * NO/NC Combination Can Be Changed on Request.
- * Push Button Size and Appearance Subject to Change Without Prior Notice.



Scan product



Ref: KTI01002003COFA

Face, PIN, Card COSEC ARGO FACEE Reader

Human Face -Yes

PIN -Yes

Card -EM Prox

User Profiles -50,000

Face Templates -200,000

Max. Templates Per User -30

Event Logs -500,000

Dimensions (HxWxD) 186mm x 74 mm x 50mm (Wall Mount)

Display -3.5" IPS LCD (Touch Screen)

Display Resolution -480 x 320 Pixel

Gorilla Glass -Yes (Gorilla Glass 3)

CPU Quad Core ARM Cortex-A7 @ 1.5 GHz -GPU

Built-in 2 TOPS Neural Network Computin...



Scan product


Ref: KTI0200200FRSPL

Floating Resting Pole For Boom Barrier

Floating Resting Pole For Boom Barrier



Scan product



Ref: KT10400100P66X4

Pollution Control Data Display Board P6 6X4 Feet



Pollution Control Data Display Board, Pixel Density: P6,
Dimension: 6 Feet X4 Feet
Pixel Density -P6

Outdoor

Multicolor

Module Size -192*192 mm

Module Pixel -32*32=1024dot

Input Voltage -230V

Dimension -6 Feet X4 Feet

Connectivity : LAN

SMD

MS Powder Coated with canopy(IP65)

Specification

LED Screen Name: P6 Outdoor Integrated 3 in 1 Full Color SMD Series

LED Class: Integrated 3 in 1 SMD Series

Pixel pitch: 6 mm



Scan product


Ref: KT190006001CNTS

Controller For Sliding Gate

Controller For Sliding Gate



Scan product



Ref: KTI09004001SWPA

Sweeper With Tank K70 40

Model : K 70/40

Type : Thrust Drive (Manual)

Theoretical Coverage (max) : 2450 m²/h

Drive : For sliding

Sweeping Brush Width : 500 mm

Brush Type : Single dish Brush + roller

Sweeping Width With 1 Side Brush : 700 mm

Tank Capacity : 40 L

Dimensions Product : 790 x 760 x 460 mm

Net Weight : 25 kg



Specification

The K 70/40 is a highly efficient, manual walk-behind floor sweeper designed for cleaning both indoor and outdoor surfaces without needing batteries or electricity. It features a w...



Scan product

Ref: KTI10003002D101

Ultrasonic Rat Repeller Digital Model No 101A

Ultrasonic Rat Repeller (Digital)

Home, Office, ATM etc.

Power Supply 220 VAC, 50 cycles/24 Volts DC 80 ma


Protects up to 400-500 sq. ft

power consumption : 10 watts

output sound pressure: 115 Decibels



Scan product



Ref: KT10900400DE430

Single Disc Scrubber Machine

Model No E430 S

Columbus single-disc scrubber Model E 430 S is a robust, corded electric floor cleaning machine

Key Specifications

Working Width: 430 mm

Pad Size: 17 inches (international standard)

Design: Robust metal/durable construction with an ergonomic, infinitely adjustable steering handle.

Drive System: Maintenance-free planetary gear

Operation: Quiet and safe for daily,...

Specification

The Columbus single-disc scrubber Model E 430 S is a robust, corded electric floor cleaning machine designed for efficient deep cleaning, scrubbing, and polishing of various hard f...



Scan product

Ref: KT110007002JETO

ABS Jet Hand Dryer

Model No. :OR/HD/10

Voltage: AC220-240V - 50/60HZ

Input Power: 1750 - 2050W

RPM: 24000

Drying Time: 10 Sec

Air Speed: 90 M/s | HEPA Filter

Material: ABS


Dimension: 685 x 300 x 220 MM



Model No.: OR/HD/10



Scan product



Ref: KTI0400700DPEBC

Electric Break Coil Ditec

Electric Break Coil 62656



Scan product

Ref: KTI10009001EP33

Paper Towel Dispenser Model EP33

Brand : Euronics

Material -ABS Plastic


Paper Towel Dispenser (M-Fold), (300 Tissues), Small

Maximum Towel Spec(mm) - 255(L) x 80(W) x 200(H)

Dimension (mm) – 282(L) x 249(W) x 100(H)



Scan product



Ref: KTI10015001ASD6

Automatic Soap Dispenser

Automatic Soap Dispenser
Capacity : 1000ML
Color : White & gray
Material : ABS
ASD/06



Scan product


Ref: KTI1200600IAT75

Altos 75 Interactive Flat Panel EZB75

- 75" LARGE SCREEN TO REACH LARGER AUDIENCE
- 4K | IPS SCREEN | DLED
- QUADCORE PROCESSOR
- EYE-CATCHING, RAZOR-SHARP IMAGES THANKS TO 4K UH RESOLUTION
- 40 POINT TOUCH DISPLAY WITH INFRARED (IR) TECHNOLOGY
- BUILT-IN PLAYER
- SUPPORTS INTERACTIVE WHITEBOARD (IWB) FEATURE
- STUNNING IMAGE WITH 1.07 BILLION COLORS
- RELIABLE SOLUTION TO SUSTAIN 16/7 OPERATION
- WIFI 6E
- BT 5.4
- ANDROID 14
- O...



Scan product



Ref: KT114006001WP25

Ahuja Portable PA system WP225

Portable Speaker with Wireless Hand Microphone
Elegant, rugged & easy to carry amplifier which delivers 20W (max.) output power. Built-in digital MP3 player with recording and Bluetooth function.

Operates on AC mains, 12V external car battery & 11.1V 2200mAh internal rechargeable lithium battery.
Facility for recharging an 11.1V 2200mAh Li-ion battery is provided along with a c...



Scan product

Ref: KT102006010AZ10


Swing gate Motor AZSW109A/1000KG

KIT INCLUDES Operator (1000Kg)- 2 No's Control unit
AZSWDC228- 1 no BOLT-TRANSMITTER- 2nos (AZ-T23B)

Swing Roller gate operator is Designed to move gates
Installed in Heavy Industrial and Commercial Buildings
Easier to drive the gate motor is Mounted on the far end
from hinged point
Spring enhances the tolerance capacity against the uneven
surfaces of the road up to 80 mm
Unl...



Scan product



Ref: KT102017TS2000P

Tripod Turnstile TS2000 Plus Zkteco

TS2000 Plus Series

Drop arm tripod turnstile. Improve the turnstile reliability and efficiency.

The durable SUS304 stainless steel housing ensures that the device can be anti-rust. Certified by Salt spray test 72 hours. Waterproof -Passed the self-laboratory test which is equivalent to IPX4 protection rating.

Arm loading

The stainless steel arm has a 38mm diameter of rod. It pr...



Scan product

Ref: KT109004001VCSW

Vacuum Cleaner SW52 S

Vacuum Cleaner

Model : SW 52IS

Rated voltage : 230 V

Power max. : 2400 W

Mains cable : 12 m

Low pressure, max. : 240 mbar

Air flow, max. : 116 l/s

Number of motors : 2

Working width : 400 mm

Suction hose : 2.5 m

Tank capacity : 78 l

Noise level : 80.5 dB(A)

L x B x H : 650 x 590 x 1050 mm

Weight 30 kg




Specification

The SW 52|S is a heavy-duty, 78-litre commercial and industrial wet & dry vacuum cleaner engineered by Columbus Clean for large-scale professional cleaning. Powered by a robust 240...



Scan product



Ref: KT101003001CUCO

Customize Controller

Customize Controller As per Requirement



Scan product



Ref: KT102002001AUZ6

Boom Barrier 6 Meter with Skirting

STAR-FENCE BLDC BOOM BARRIER

Model no. AZBB115/AZBF036M


BLDC BARRIER - AZBB115

FENCH BOOM 6MTR - AZBF036M

TRANSMITTER - AZBLDCTX22 - 2 NOS



Scan product



Ref: KT104001001TKMD

Token Display Multi Display System

Multi Display Token Display

No. Of Display unit 3

No. Of Call Counter 1

Token Dispenser (Manual Cutter/Auto Cutter -1

7-Segment Based 3 Digit Display

- 4-inch Display (Visibility up to 40 feet)
- Voice Announcement in English, Hindi, Gujarati and some Regional languages
- Volume Control

No image



Scan product

Ref: KT10401200S23PC


Display Call cancel SM323PC

Model No :- SM323PC

Main Display with 2x3 FND (2 digits X 3 displays) 20 call memory



Scan product



Ref: KT101001002FLG2

Standalone Access Control Device Frameless Glass Door Lock FLG22

Model Name:

Storage Capacity

Finger Capacity : 100

Card Capacity: 100

Max User 100

Log Capacity: 160

Features

High-Speed and Accurate Identification

Good adaptation for dry, moist and rough fingerprints

Fingerprint, Mifare Card, Password authentication

Supremely low Electric energy consumption

Metal body for durability

TN Color Display for Convenience

Biometri...



Scan product

Ref: KT102003002NS34

Retractable Gate 1.8 Meter Height SS 304 No See Through

Retractable Gate

Material:- Stainless Steel 304

No See Through

Height:- 1.9 Meter

Length:- As per requirement

Width:- 0.66 Meter

Power:- 370 W

Thickness:- 0.5 mm

Main Material:- 50 *51*0.5 mm

Vice Material:- 48 *33*0.5 mm

Release Key:- 2 PCS

Control Panel:- 1 PCS

Remote Control:- 2 PCS

Fix LED Screen Display (Both Side)

Front:- Welcome


Back:- Safe Trip

Imprint the company log...

No image



Scan product



Ref: KT102006002844C

Sliding Gate Motor 1800 KG FAAC



Model 844 C Z16
Power supply 220 - 240 V ~ @50/60 Hz
Max power 230 W
Pinion Z16 Module 4
Max. thrust force 1300 N
Max leaf weight 1800 kg
Max. leaf speed 9.6 m/min
Max leaf width 40 m
Stopping space 30 mm
Intended use Industrial/Commercial/Residential
Use frequency High traffic
Protection rating IP44
Operating temperature -20°C to +65°C
Start-up capacitor 18 µF
Thermal protecti...



Scan product

Ref: KT104001001A6X4


Safety LED Display Board Accident Free Days 6X4 Feet



Size: 6 Feet X 4 Feet
Pixle Pitch-P10
5: Character height
Connectivity :Mobile
Color -Red



Scan product



Ref: KT10400100P16X4

Pollution Control Data Display Board P10 6X4 Feet Multicolor



Pollution Control Data Display Board,
Pixel Density -P10

Outdoor

Multicolor

Module Size -192*192 mm

Module Pixel -32*32=1024dot

Input Voltage -230V

Dimension -6 Feet X4 Feet

Connectivity : LAN

SMD

MS Powder Coated with canopy(IP65)

Specification

LED Screen Name: P10 Outdoor Integrated 3 in 1 Full Color SMD Series

LED Class: Integrated 3 in 1 SMD Series

Pixel pitch: 10 mm



Scan product

Ref: KT10400100TDLD10

Dual Side Clock 3 feet X 10 Inch

size 3 feet x 10 inch character height


Red color

HH:MM: SS

Dual side



Scan product



Ref: KT10400100TDLDR9

LED Reverse Counting Clock 3 feet X 9 Inch

LED Reverse Counting Clock
size 3 feet x 9 inch character height
Red color
HH:MM: SS
Single Side
Aluminum Body
Power Supply 230V



Specification

230V Power Supply, Reverse Count Clock Led, Aluminum Body, Size 3ft x 9inch



Scan product


Ref: KT10400100TDLRCD

Reverse count down dual Side Display board

Reverse count down Led display board
with 3 Digit
Ch. Height -6 inch
Double side led display
with reset button to countdown Reverse in every second
Can be reset as per requirement
(Green/yellow/Red color display as per % completion of time.



Scan product



Ref: KT10400700DPHSL

Ditec Safety Photosensor LIN2

Photocell Model LIN2

Outside photocell - card that can be oriented in three positions

Capacity -Configurable 10 m – 30 m max

POWER SUPPLY - 24 Vdc - 24 Vac

POWER INPUT - Max 50 mA

RELAY CAPACITY - 24 Vdc / 1 A max

Temperature --20°C ÷ +55°C

Protection rating -IP44



Scan product

Ref: KT110002001K20L

Sensor Tap Euronics KSDT20L

Euronics KSDT20L

Automatic Tap Cum Automatic Soap Dispenser (2in1)

Counter Mount

Operation : Automatic Infra-Red Sensor

Supply Volume Per Drop (Soap Dispenser) : 2ML

Liquid Volume (Soap Dispenser) : 1500ML

Detecting Distance : 09-20 cm (Soap Dispenser & Faucet)


Power : Electrical (AC 220V/50Hz)

Inlet Water Pressure : 1.5 to 4.0 Bar (Min 1 bar Working pressure required)

Materia...



Scan product



Ref: KT11200600TIFS65

Samsung INTERACTIVE FLAT PANEL 65

Samsung WAC Series: As an Android 11-based product
KEY HIGHLIGHTS



- Resolution: 3840X2160(UHD-4k)
- 16X7 Per Day Functionality
- 50,000 Hrs. Display Life
- Intuitive UI: pen & brush mode, quick tool, palette menu
- Android OS
- Easy Multitasking
- Powerful Screen Sharing
- Intelligent App for Class
- Multi-point Touch Drawing (up to 20 people)
- Dual Pen
- HDMI 3 (Rear 2, Fron...



Scan product

Ref: KT10100400DG304

Digital Drawer Lock Dorset DG304

Digital Drawer Lock

Model No.: DG-304

Type: Digital / Biometric Drawer Lock

Access Mode: Fingerprint


Fingerprint Capacity: Up to 40 users

Power Source: Battery operated

Application: Drawer, cabinet, wardrobe



Scan product



Ref: KT10100400DG902

Digital Lock Dorset DG 902

Digital Lock D 902 5-in-1 Access (Bio + Pin + Card + Key with Wi-Fi Inbuilt)

Finger Print ID (Upto 100 unique access)

Password: (Upto 100 unique access)

RFID (Upto 100 unique access)

Mechanical Key

Auto/Manual/Privacy Locking

Low Battery Alarm

Door Thickness: 35mm-90mm



Scan product

Ref: KT10100400PNGS1

Smart Glass Door Lock G1 Phlipton

Model: PN-GDL-GS1 (WiFi Series G1)

Brand: Phlipton

Series: WiFi Series G1 Smart Lock

Access Modes: Fingerprint, Passcode, Mobile App (WiFi enabled), Mechanical Key, Wireless Remote

Fingerprint (100)

Card and password (1000 groups)

Connectivity: WiFi (App-based control)


Power supply : 4pcs 1.5V AA alkaline dry batteries

Colors : Matte black, space gray, champagne gold

Applicatio...



Scan product



Ref: KT10100408DG413

Digital Lock Yale YDG 413 GL

Digital Lock Yale YDG 413 GL

Voice Guide Feature

The voice guided operating manual for easier and more convenient use.

Automatic Locking

The Yale smart digital lock series automatically locks the door

after checking it is properly closed.

Fake PIN Code

To prevent the PIN code from being exposed, It allows you to enter fake

numbers before or after entering your PIN code.

Low B...

Specification

Smart, Secure and Convenience for Your Glass Door

YDG413 smart lock gives you simplified control on protection for glass door. It offers advantages to those who are searching for ...



Scan product

Ref: KT102006002M60

Sliding Gate Motor 600 KG

Sliding Gate Motor -AZSL100B

1) Operator only 220V AC Operator AZSL100B- 1

No (including Operator+ control board +Base plate + Magnet limit + Fixing

Accessories)2)TRANSMITTER (AZT30A) - 1 Nos

Sliding Gate Motor -AZSL100B

Model -AZSL100B

Power supply -220V AC

Motor power -370 W

Gate moving speed -11 - 13 m / min


Maximum weight -600 Kg

Transmitter Distance -≤ 30 m

Limit switch ...



Scan product



Ref: KT104001001ACCS

Safety LED Display Board Accident Free Days 4 x 3 Feet

Size: 4 Feet X 3 Feet
Pixel Pitch-P10
Connectivity : Lan and Mobile
No. Of window - 5
Color -Red



Scan product


Ref: KT104001001FFFA

Fire Fighter and First Aider Display Board 3X1 Feet

Size: 3 Feet X 1 Feet
Pixel Pitch - 5 mm
P5
Colour: Red
Character Height - 1.5"
Connectivity: Mobile app
Name display in Flip Mode



Scan product



Ref: KT104001001TK4D

Token Display 4 Multi Counter Token Display

Multi Counter Token Display 4 Row FnD Display


5 Digit 2.3 inch (Digit size)

No. Of Master unit 1

No. Of Call Counter 4 (Keypad with 16 keys)

Calling desired number

Voice Announcement in English, Hindi, Gujarati and some Regional languages



Scan product


Ref: KT104001005SMPS

5V 10AMP SMPS

5V 10AMP SMPS for Led Display




Scan product



Ref: KTI0400700DPBCK

Brake component Kit Ditec

Brake components kit NC6CS18KF



Scan product

Ref: KTI10011001G3MM


PVC Strip Curtain Roll 3mm Grey color

P.v.c Strip Curtain Roll Non Transparent

- 3 Mm Thickness
- 8" Width Of Each Strip
- Grey Color Available
- 50 Mtrs. Length
- Normal Grade



Scan product



Ref: KT11200600ITFH65

Hikvision Interactive Flat Panel Display 65 inch

DS-D5B65RB/EL
65-inch 4K Interactive Flat Panel Display



Commercial Grade and UHD 4K Display with Resolution of 3840×2160

- Zero-Gap Optical Bonding Screen reduces diffuse reflection and eliminate screen ghosting
- Professional Anti-glare and Anti-fouling surface treatment design to ensure smooth interaction along with Auto Brightness & Temperature Control
- Anti-blue Light Fil...

Specification

65-inch 4K Interactive Flat Panel Display
Model : DS-D5B65RB/EL(O-STD)/8G+128G
65-inch 4K Interactive Flat Panel Display
Model : DS-D5B65RB/EL(O-STD)/8G+128G
□ Specification□
Panel...



Scan product

Ref: KT112006052HK86

86 Inch Interactive Flate Panel D8B86RB EL

Commercial Grade UHD 4K Display (3840×2160)



Zero-Gap Optical Bonding Screen reduces diffuse reflection and ghosting

Professional Anti-glare, Anti-blocking (scratch & fingerprint), Anti-fouling surface treatment

Auto Brightness & Temperature Control


Anti-blue Light Filter for eye protection

Ultra-Fine Writing Experience with fast response

Annotation over anything, anywhere...



Scan product



Ref: KT113014001GP70

Electronic Safe Make: Godrej Model:NX PRO Plus 70L DigiBio



Make : Godrej
NX PRO Plus 70L (Digi +Bio)
Size : (cm)55.8 (h) x 37(w) x 44.5 (d)
Weight : 27.1 Kg
Volume : 70Ltr



Scan product

Ref: KT114002001AU98


PA Microphone AUD 98 XLR



Transducer Type: Moving coil dynamic
Polar Pattern: Unidirectional (cardioid)
Frequency Response: 50Hz to 15,000Hz
Sensitivity: 2.5mV/Pa
Impedance: 600 ohms



Scan product



Ref: KT114002001TZA7

2 Zone PA Amplifier TZA 7000

Ahuja model TZA-7000

6 Mic & 2 Aux Inputs

Power Output : 500W + 500W Max., 350W + 350W RMS at 10% THD, 300W + 300 RMS at 5% THD, 280W + 280W RMS at 2% THD

Output Regulation : ≤ 2 dB, no load to full load at 1kHz

Input Channels : Mono 6 $\times$ Mic 0.6mV/4.7k Ω , 2 $\times$ Aux 100mV/470k Ω , Stereo L/R 200mV/100k Ω , Line L/R 1V/50k Ω

Frequency Response : 50-15,000Hz ± 3 dB

Signal to Noise Ratio : 6...



Scan product

Ref: KT1160260023MY

Road Stud Without Shank Make 3M

Performance Feature: Day And Night Visibility

Directionality: Two-way

Size: 100 MM x 90 MM x 18 MM

Material: PLastic

Height: 18 MM

Width: 90 MM

Weight: 100 Gms

Color: Yellow With Yellow Reflector

White With White Reflector


White With Red Reflector

Suggested Applications: Road Edge Line, Road Center Line, Pedestrian Crossing

Warranty:- Not Applicable



Scan product



Ref: KT11400400AM15W

PESO Approved Flameproof Megaphone 15W



PESO Approved Flameproof Megaphone 15W

Technical Data : MCH 6001

Enclosure: Ex-d, Gas Gr. IIA, IIB & IIC as per IS/IEC 60079-1 & IS/IEC 60079-0

Protection: IP-65 as per IS/IEC 60529

Area Classification: Zone-1 & 2

Certification: CIMFR/TC/SR/H413

Material of Construction: Die Cast Aluminum Alloy

Rating:

Input Voltage: Max. up to 230 Volts AC, or up to 110V DC / 24V DC

Input Powe...

Specification

FLP Speaker with Megaphon 8 OHM 15Wat ,
Speaker CIMFR /CMF-21 INEX 0403 with recharge
Battery 3.7*4, LED Switch & Charging IC & 15w
Amplifier IP 66 Ahuja Mick With FLP Gland all in...



Scan product

Ref: KT119001001302P

Solar Blinker with Battery 12.8 V / 6 Ah




Features: -

- Low Power Consumption (less than 4W, 1/10th of incandesce lamp)
- Constant light output, even with variations in supply
- Low output degradation
- Even distribution of light
- High bright, focused and low power consumption LED's of Ever-light
- Automatic dusk to down switching (optional)
- Around 40 flashes per minute (as per user specifications)

Model Number -El...



Scan product



Ref: KT104001001DGEC

Digital Clock 2.3 inch Ch Height with SS Frame

Clock: Input through Ethernet

Controller: Microprocessor-based

Resolution: HH: MM

: DD: MM

Power Supply: POE

Mounting: Flush/ Conceal

Enclosure: Front plate SS304, with powder-coated back box

Display: 2.3" RED colour 7 segment

PC side software we will provide you free of cost



Scan product

Ref: KT101001002SKIS

Video Door Phone Hikvision DSKIS603PC Video Intercom Network Bundle

IP video intercom bundle for villa or house

One call button for easier calls

Convenient Hik-Connect APP Mobile Control

Including: DS-KV6113-WPE1(C) × 1, DS-KH6320-WTE1 × 1,
PSU × 2

Power adapter included in the package



Door Station

Operation system

Embedded Linux operation system

Flash

32 MB

RAM

256 MB

Camera


Camera

2MP HD camera

Night ...



Scan product



Ref: KT1010040GDLSW

Digital Door Lock-DLS1



Model : DL S1
Power Supply : 4.5 v - 6v (4 pcs AA Cell Power)
passcode length : 6-8 Bits
card volume - 100 pcs
Password Volume - 100pcs
Finger Volume: 50 pcs
Administrator : 9
Door Thickness : 38-120mm
Material : Aluminium Alloy
Size : 358x70 mm



Scan product

Ref: KT110002001NH02


Contactless Sensor Tap T 102




Model : T-102
Smart Contactless Automatic Sensor Tap(AC/DC)
Dimension : L-190, Distance of premix from bottom-100 mm,
Control Box: L-124 mm, W-90 mm, D-54 mm
Material : Chrome Plated Brass Metal Body
Power : 220V AC / DC 6V - 4xAA Alkaline Batteries
Application Area : Basin Mounted
Sensing Range : 150 mm Adjustable
Water Pressure : 0.02 Mpa-0.8 Mpa, *0.05 Mpa is minimum
Requi...

Specification

T-102 Tap is an Ergonomically Swan Neck Design. It offers touch free convenience and ensuring reduces the spread of germs and bacteria. This Tap help prevent water wastage, saving ...



Scan product



Ref: KT1100080MINIOR

Mini Insect Killer Orchid

Mini Insect Killer Orchid

Model : OR/FK/01

Fitting: Wall/Ceiling

Material:- Metal body

Power used: 40W

U.V Tubes: 2 Nos. X 12"

Open Area: 250 SQ.FT

Closed Area:350 SQ.FT

Dimension: 300 x 330 x 90 MM



Model No.: OR/FK/01

Specification

Ideal for homes, offices, hotels, restaurants, and commercial spaces. Effectively attracts and eliminates flying insects for improved hygiene.

Suitable for kitchens, dining areas, ...



Scan product

Ref: KT114006407SP6

Garden Speaker SP6305TD

Product Dimensions 17 x 25 x 17 cm; 4 kg

Item model number Ahuja SP-6305TD Special Purpose

Speker

Colour white

Speaker Amplification Type Passive


Power Source Battery Powered

Wattage 30 Watts

Item Weight 4 kg



Scan product



Ref: KT1040120SLTSB62

Call Cancel button Transmitter with pullstring1 m SB62XWHS SB63XWHS

Call / Cancel button (Transmitter) with pullstring(1 m)

The battery life 1 - 3 years

The length of the twisted pull cord is up to one meter

Used in Toilet / Wash room

Separate Cancel button available



Scan product

Ref: KT119001001303P

Solar Blinker Dual Power With Pole

Solar Blinker Dual Power With Pole




1. Light Emitting Area Size: 300 mm (12 Inch) Dia. (Polycarbonate housing)
2. LED Qty : 141 TO 190 Pcs Yellow / Red LED
3. Material: Moulded Polycarbonate(PC), Suitable for Extreme Weather Condition.
4. Power Supply : 12 v DC.
5. Light Source : Ultrabright LED's
6. Colors: Red / Yellow,
7. LED color: as ordered by you
8. Front Hood : Made...

Specification

300 mm dia polycarbonate traffic signals with smf/ lithium battery inbuilt in housing (plz see the picture) ,solar panel with solar charge controller & 360 degree rotating mechan...



Scan product



Ref: KT102008004FB70

Single Lane Flap Barrier FBL 700 Zkteco



Model No, : FBL 700

Power Requirements AC100 ~ 120V/200 ~ 240V, 50/60Hz

Working Temperature -28°C ~ 60°C

Working Humidity 5% ~ 80%

Working Environment Indoor/Outdoor

Max. Speed of Throughput 30 people per minute

Lane Width (mm) 600

Dimension (L*W*H) 1200 * 300 * 980 (mm)

LED Indicator Support

Cabinet Material SUS304 Stainless Steel

Lid Material SPCC (with black baking paint)

Ba...



Scan product

Ref: KT119001001312P

Solar Blinker with Battery 12.8 V 12 Ah




Features: -

- Low Power Consumption (less than 4W, 1/10th of incandesce lamp)
- Constant light output, even with variations in supply
- Low output degradation
- Even distribution of light
- High bright, focused and low power consumption LED's of Ever-light
- Automatic dusk to down switching (optional)
- Around 40 flashes per minute (as per user specifications)

Model Number -EI...



Scan product



Ref: KT114002001SS25

Power Amplifier Ahuja SSA 250M

Model: SSA250M

Item dimensions: L x W x H 52.2 x 43.6 x 21.2 Centimeters

Voltage: 240 Volts

Minimum Supply Voltage: 240 Volts



Scan product


Ref: KT102002001RELY

Relay

Relay for Multiple use.



Scan product



Ref: KT110007002EH20

Hand Dryer SS Euronics EH210N

EH210NSTAINLESS STEEL HAND DRYER

Casing -Stainless Steel #304 Grade

Filter- HEPA Filter

Operation- Automatic

Sensor Range -12-15 cm

Hand Dry Time -Less than 20 seconds

Auto Cutoff -30 seconds

Motor -Brush Type, Dual Ball Bearings


Speed- 26,000 RPM

Rated Power -1800 W

Protection Class -IPX1

Blowing Volume-> 270 m³/H

Air Speed90 m/s

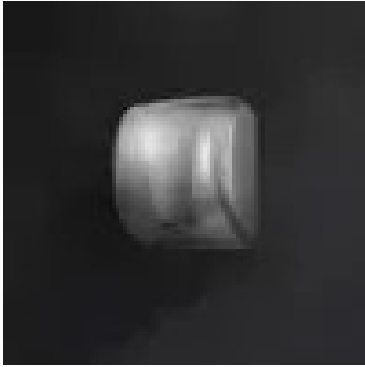

Scan product

Ref: KT1000000EHSSVE

Stainless Steel Hand Dryer Velora

Hand Dryer VELORA SS

Body Material : Stainless Steel #304 Grade

Operation : Automatic Sensor

Sensor Range : 10-12 cm

Drying Time : Less than 30 seconds

Motor Type : Brush AC Type

Motor Speed : 30,000 RPM

Rated Power : 1250 W (500 W Motor + 750 W Heating Element)

Air Speed : 100 m/s

Air Flow (Blowing Volume) : >270 m³/h


Protection Class : IPX3

Filter : HEPA Filter

Auto Shut-off ...



Scan product



Ref: KT1040120SLTSB71

1 button, Paired Cancel only black, Water resistant(IP X8)



1 button, Paired Cancel only black, Water resistant(IP-X8)

Excellent Performance and Reliability

Attractive compact design

Quiet Operations for Call and Response

Easy Installation and Use

Water Proof

Battery life 18-24 Months



Scan product

Ref: KT101002003F09W

Face, Finger, Card F09



Multi - Biometric Access Control Terminal With Video Intercom Capability

Fingerprint Template Capacity -3,000 (1:N) (Standard)

Face Template Capacity -1,500 (1:N) (Standard) \

Card Capacity -3,000 (1:N) (Standard)


User Capacity -3,000 (1:N) (Standard)

Transaction Capacity - 150,000 (1:N)

Simple access control functions (Electric Lock; Door Sensor; Exit Button)



Scan product



Ref: KT104007001PHWW

Wireless Safety Photosensor

Wireless Safety Photosensor For Multiple Uses.
With NO,NC Facility
Power : 12V DC.



Scan product


Ref: KT11000203013C6

Air Curtain 6 Ft CMR

Air Curtain (6Ft.)-03Motors & 5 Blowers
Make : CMR
Model : CM 132(C)
Power (watts) : 750 W
Air Velocity (m/s) HI: 21 LO: 16
Air Flow (m³ /h) : 2534
Noise (db) HI: 70 LO : 63
Dimensions (mm) : 1500 x 230 x 212



Scan product



Ref: KT119003002B40W

All In One Solar Street Light 40w Reflector Model with Remote 24 window



All In One Solar Street Light 40w Reflector Model with Remote 24 window

No. of LED: SMD5730 1152nos.

Solar Panel: 5v 35w Mono

Life Po4 Battery 3.2v 30000Mah

Led Power: 450w

Light Colour: Cool White

Charging Time: 6-8 Hrs

Lighting Time: Upto 2 Nights*

Dimension: 65*34cm

Motion Sensor

Dawn to Dusk Sensor

Application: Outdoor

Remote Control

Specification

All In One Solar Street Light 40w

Reflector Model with Remote (24 window) IP65



Scan product



Watch video

Ref: KT104001003TMHD

Temperature Humidity Display Board with NABL Certificate

4 inch 3 digit dual display metallic body ,high Brite LED
branded display ,with sensor

Micro controller Based

Supply -100-250V AC SMPS Based

Range -Temperature 0-99 Degree C

Display -3 Digit 7 Segment Red LED Display Board


Control 4 Tactile Switches

Size : 412 MM X 45 MM X 325 MM Approx

Box - MS Powder coated



Scan product



Ref: KT110003003USRS

Solar Ultrasonic Snake Repellent



[Watch video](#)

Solar Snake Repellent

For Garden, flowerbed, firms, etc.

Repels Snakes

Cover up to 800 Square meter (with out optical)

Door Area

size -17" to 18" approx.

Item Length- 60.96 cm

Material-Metal Body

Special Feature: Install into the soil to keep the top cover at least 1-2 inches above ground level & Power on 24 Hrs round the clock.



[Scan product](#)

Ref: KT102008004FB52

Single Lane Flap Barrier FBL 520 Zkteco



Model Name -FBL520

Barrier Material -Acrylic

Barrier Movement -Retracting

Cabinet Material -SUS304 Stainless Steel

Dimension (L*W*H) -1360 * 280 * 980 (mm)

Emergency Mode -Support

LED Indicator -Support

Lane Width (mm) -600

Lid Material -SUS304 Stainless Steel


MCBF -2 million

Max. Speed of Throughput -30 people per minute

Opening Noise -≤30dOpening Time -0.8s



[Scan product](#)



Ref: KT104001001SFTT

Digital PPE Indicators with Talking Board

Talking Board / Digital Indicators (Blank & White)
Voice-Assisted PPE Matrix Board

This model functions similarly to the standard backlit board, with the added feature of voice guidance. When an activity is selected, the system audibly announces the required PPE sequentially, synchronized with illuminated PPE indicators.



16 activities and 20 PPE
32" x 24" Board
Activity- Name_...



Scan product

Ref: KT104001001TDWR_SMDMODULE

Token Display Wireless SMD Module

WIRELESS TOKEN DISPLAY WITH KEYPAD

RANGE : 10 to 12 meters

Dimensions: 12.5" x 6.25" (approx)


Cabinet MS with chemical processed powder coated.

Language: Hindi, English.

Warranty:- 1 YearLed Type: SMD Module



Scan product



Ref: KT1040120SLT10RG

Corridor lamp

Wall-mount type corridor lamp (Receiver) 7-lighting colours available (colour selectable)
Single light with 6 colours

Different colours for the different call types

Can be configured with 20 Call Points

Common Light for Twin Sharing to reduce Investment

Light Steady / Blinking (Flashing) Configuration

Beep sound on or off



Scan product

Ref: KT102002001B614

Boom Barrier Without LED 6 Meter Length

Model B614

Make : FAAC

Maximum Anti-crushing safety and motor with integrated encoder

- Speed adjustment and smooth operation.
- Integrated control unit in the upper part of the beam body, i.e easy maintenance and intuitive programming

Power supply voltage 220-240V ~ 50/60 Hz

Electric motor With brushes 24V

Max. power 165 W


Max. torque 300 Nm

Material type Steel

Type of treatm...



Scan product



Ref: KT102008004FB50

Single Lane Flap Barrier FBL 500 Zkteco



Model Name -FBL500
Barrier Material -Acrylic
Barrier Movement -Retracting
Cabinet Material -SUS304 Stainless Steel
Dimension (L*W*H) -1360 * 280 * 980 (mm)
Emergency Mode -Support
LED Indicator -Support
Lane Width (mm) -600
Lid Material -SUS304 Stainless Steel
MCBF -2 million
Max. Speed of Throughput -30 people per minute
Opening Noise -≤30dOpening Time -0.8s



Scan product

Ref: KT1040120SLT5BPR


Transceiver (Receiver & Transmitter) max. output 10mW (Repeater)



Transceiver (Receiver & Transmitter) max.
output 10mW
Extending the signal range
LCD display: Easy configuration
Avoid duplication of the same calls
Register up to 999 Call Buttons
Power supply: AC110~240V, DC12V/1A adaptor



Scan product



Ref: KTI10013001DSCM

Electrical Sole Cleaning Machine

Electrical Sole Cleaning Machine with Drain
Model DSCM0002

Material 304 Stainless Steel

Dimensions 768 × 1338 × 140 mm

Dry Zone Size 405 × 524 mm

Clean Zone Size 616 × 524 mm

Voltage 220V / 50 Hz

Operation Electrical

Start Mode Sensor auto start

Brush Rotate Speed 10 m/min

Noise Level < 60 dB

Cleaning Mode Auto button drain

Auto Cut 10-12 seconds



Specification

The DSCM0002 Electrica Shoe Sole Cleaning Machine features sturdy 304 stainless steel construction with sensor auto-start and auto button drain. Its large cleaning zones and quiet ...



Scan product

Ref: KTI14002001G615

Goosneck Microphone GM615M

All six microphones feature

- Wide frequency response.
- High front-to-back rejection for more gain bef
- Built-in XLR socket.

Specifications

GM-615M

Frequency Response 50-18,000Hz Impedance 1kn


Sensitivity 5.0mV/Pa

Power Source 1.5V-9V DC

Overall Length 585mm (23")



Scan product



Ref: KT1000000EHTRIM

Hand Dryer SS TRIMAX Euronics

SS Hand Dryer TRIMAX Euronics

Motor Type : Brushless Motor

Material : Stainless Steel #304 Grade

Mounting : Wall Mounted

Operation : Touch-Free Infra-Red Activation

Hand Dry Time : 20 Seconds

Auto Cut-Off : 60 Seconds

Motor Speed : 36,000 RPM

Rated Power : 500 W

Protection Class : IPX1

Air Speed : 110 m/s

Dimensions : 263 (L) × 97.9 (W) × 306.5 (H) mm



Scan product

Ref: KT101002003SMAC

Face, Card MiniAC

odel MiniAC

Display 4.3"@ TFT Colour Touch LED Screen (272*480)

Camera WDR Binocular Camera @ 1MP

Operation System Linux

uthentication method Face / Card / Password (Virtual Keypad)

Face Template Capacity 1,500 (1:N) (Standard)

Card Capacity 1,500 (1:N) (Standard)


User Capacity 1,500 (1:N) (Standard)

Transaction Capacity 200,000 (1:N)

Max. User Password Length 8 Digits



Scan product



Ref: KT10200600D800

Sliding Gate Motor Ditec NEOS Series 800kg

Sliding Gate Motor Ditec NEOS Series NEOS 800G 800kg



Max. leaf weight- 800kg

Stroke control - limit switch +virtual encoder

Maximum opening - 20 m

Duty class - 4 - heavy duty

Power supply- 230 Vac - 50/60 Hz

Motor power supply- 24 Vdc

Power input- 1,5 A

Thrust - 800 N

Opening and closing speed - 0.1 - 0.24 m/s

Release system for manual opening - key operated



Scan product

Intermit...

Ref: KT1020060AZ106A

Swing gate Motor AZSW106A 300KG

KIT INCLUDES Operator (300Kg)- 2 No'sControl unit
AZSWDC228- 1 noBOLT-TRANSMITTER- 2nos (AZ-T23B)



Swing Roller gate operator is Designed to move gates
Installed in Heavy Industrial and Commercial Buildings
Easier to drive the gate motor is Mounted on the far end
from hinged point
Spring enhances the tolerance capacity against the uneven
surfaces of the road up to 80 mm
Unli...


Specification

PRODUCT DESCRIPTION:

o The swing gate operator is applicable for all gates with the weight
of the single-leaf gate up to 300 kg and the width of each swing gate
should be 2.5m/3m
o...



Scan product



Ref: KT1040010KTFCT1

Temperature Humidity Display Display 2 Feet X 1 Feet

Full-Color LED Temperature and Humidity Display Board

Size: 2 ft x 1 ft

p10

Ch. Height: 2.5 inches

RGB

Connectivity: Wifi

Body: Aluminium Alloy



Scan product

Ref: KT1000000EHTIER

SS Hand Dryer Tierra Euronics

Casing :Stainless Steel # 304 Grade

Mounting :Wall Mounted

Operation :Touch-Free Infra-Red Activation

Hand Dry Time :20 Sec

Auto Cutoff :60 seconds

Motor :Brushless

Speed :26,000 RPM

Rated Power :400w-1150W

Protection Class:IPX4

Air Speed :110m/s

Dimension(mm) :254(L) x 105 (W) x 322(H)

UV Lights Details


Wavelength :280nm

Power Consumption :2 to 3 mW

Life time of UV light:More ...



Scan product



Ref: KT101001002A221

Standalone Access Control Device With Card and Password SA221

Product Specification

Model Name/Number Biomax SA 221 Standalone Access Control

Display Type Touch Screen

Color Black

Language English

Operating Temperature -40 to +70 Degree Celcius

Reading Range 5 - 10 cm

Minimum Order Quantity 1

Product Description

Backlight Touch Keypad

Metal Case, anti-vandal

Wg26 Input/Output

2000 cards/codes in total

Utility: A smart lock is an electr...



Scan product



Ref: KT101001002DSKH

video door phone KH6 Series IPBased Indoor Station

Key Feature

- New UI V2.0: User friendly design
- 7-inch colorful touch screen with resolution 1024 × 600
- Standard PoE
- Stores messages and capture pictures in the TF card
- Remote unlocking via the client software or the mobile client
- Views live videos of door stations and linked cameras

Specification


System Parameters

Operating System

Embedded Linux operat...



Scan product



Ref: KT101002003ERIS

Face ,Fingerprint, Card,Password Without battery

Model : AI FACE ERIS

Technical Specifications

Display : 4-inch color LED touch screen

Camera : 2MP binocular camera

Operation System : Linux

Hardware : CPU: Dual Core@1GHz ,RAM: 1GB ,ROM: 8GB

Authentication method : Face / Fingerprint / Card/ Password

User Capacity : 3000

Face Template Capacity : 3000

Fingerprint Template Capacity : 3000

Card Capacity : 3000

Transaction Capaci...



Scan product

Ref: KT101002003ORCU

Face ,Fingerprint, Card,Password Without battery Ai Face Orcus

Model : Ai Face -Orcus

Multiple Authentication method : Fingerprint / Face / Card / Password

Fingerprint Template Capacity :3,000

Face Template Capacity : 1,500

Card Capacity ; 3,000


User Capacity : 3,000

Transaction Capacity : 1,50,000

Biometric Authentication Speed : Fingerprint:



Scan product



Ref: KT10100200602UF

Face, Finger, Card, Password Based Reader UFACE 602 ID



Face capacity : 1,200 (3000 Optional) 1:N

Fingerprints templates: 2000

Card Storage : 10,000 (optional)

Transaction storage : 1,00,000

Card reader : Yes

CPU: 1.0GHz

Fingerprint sensor : 500 DPI Optical sensor relay: 12 V relay

for lock EM lock, Bolt Lock

or Strike lock

Battery: 7.4 V, 2000 mAh Backup Battery



Scan product

Ref: KT1010040GL400

Digital Lock Glass Door Lock GL400 ESSL



Model: GL400 Plus

Shell material: aluminum alloy / ABS

- Panel material: IML injection molding / Acrylic

- Unlocking mode: APP/ Fingerprint / Password / IC card / Temporary

password / Remote control (optional)

- Fingerprint type: Semiconductor fingerprint sensor

- Recognition speed: 0.5s


- Recognition error: $\leq 0.0001\%$

- Fingerprint capacity: 100

- IC Card capacity: 200 (Shared ...)



Scan product



Ref: KT102006001800

Sliding Gate Motor Ditec Cross18VEP LCA85



Sliding Gate Motor Ditec CROSS Series CROSS18EP 1800kg

Electromechanical actuator for sliding gates up to 1800 kg

Stroke control lever-operated mechanical stop

Capacity 1800 kg

Service index intensive - up to 350,000 cycles

Intermittent operation S2 = 60 min - S3 = 55%

Cycles / hour * 19

Consecutive cycles * 33

Power absorption 230 Vac - 50 Hz (60 Hz version on request)...



Scan product

Ref: KT102006002M24

Sliding Gate Motor MCVICK 2400 kg



Sliding Gate Motor

Make: MCVICK

Power Supply: 230 V AC

Power: 250 W

Torque :22.5nm


Travel speed :11m/min

Protection Level: IP 44

Operation Temperature: -40°C ~ +55°C



Scan product



Ref: KT102008004FB72

Dual Lane Flap Barrier FBL 720 Zkteco

Model No, : FBL 720

Power Requirements AC100 ~ 120V/200 ~ 240V, 50/60Hz

Working Temperature -28°C ~ 60°C

Working Humidity 5% ~ 80%

Working Environment Indoor/Outdoor

Max. Speed of Throughput 30 people per minute

Lane Width (mm) 600

Dimension (L*W*H) 1200 * 300 * 980 (mm)

LED Indicator Support

Cabinet Material SUS304 Stainless Steel

Lid Material SPCC (with black baking paint)

Ba...



Scan product

Ref: KT102008004SATU

Single Lane Saturn 1000

Model : Saturn -1000

Visual Indicator -Steady Green

Visual Indicator

Top LED indicator:

Blue = Door closed / stand by

Green = Door opening

Red = Door closing / alarm

Lane Type

Saturn-S1000: Single lane

Lane Width-650mm (Standard)

Barrier Movement Type-Swing


Motor- DC brushless motor

Movement Speed -Average 1s per movement (Adjustable open/close timing)

Door leaf Material :...



Scan product



Ref: KT10200800SAT12

Single Lane Saturn S1200

Dual Swing(for additional lane)

650mm (Standard)

Motor DC brushless motor

Movement Speed -Average 1s per movement (Adjustable open/close timing)

Lid Material -Polycarbonate+2.5D tempered glass

Power Supply -110V / 220V $\pm 10\%$ AC @50Hz/60Hz

Noise Level -Less than 60dB

MTTR-Less than 60 minutes

MCBF -3 Million



Scan product

Ref: KT1020170MPT333

Full Height Turnstile MPT 333(4X90)

Magnetic High Turnstile Swing Entry Gate MPT 333 4wing

Model No: MPT-333C-A410 (MPT-333(4X90))

Number of Wings (Angle): 4 (90°)

Throughput: Approx. 20

Drive Technology: Electro-Mechanical

Control System: MGC

Safety System: -

Voltage: 100-240 V AC, 50-60 Hz

Power Consumption: Approx. 40 W (Without Accessories)

Duty Cycle: 100%

Enclosure Rating: IP43 (IP54 Optional)

Dimensions (L...




Specification

MPT full-height turnstiles are the ideal solution for access control in outdoor areas when large numbers of people need to enter or leave an area in a short time.

Reliable securin...



Scan product



Ref: KT104001001AC31

Safety LED Display Board Accident Free Days 1.5 X 1.5 Feet

Size: 3 feet x 1.5 feet
Pixle Pitch-P10
Connectivity: Lan and Mobile
Color -Red



Scan product


Ref: KT104001001AC54

Safety LED Display Board Accident Free Days 5X4 Feet

Size: 5 Feet X 4 Feet
Pixle Pitch-P10
Connectivity: Mobile Application
Color -Red
Outdoor



Scan product



Ref: KTl04001001DD12

Dual Side Digital Clock 12 Inch SMD Display

Size 2 feet x 1 feet

P10

Red

Character hight @ 12 inch

HH:MM

Dual side

Aluminium Fabrication



Scan product

Ref: KTl04001001DG12

Digital Clock 12 Inch SMD Display

Size 2 feet x 1 feet

P10

Red

Character hight @ 12 inch


HH:MM

Single side

Aluminium Fabrication



Scan product



Ref: KT104001001SFCM

Digital PPE Matrix Board Multicolor 3X3 Feet



FABRICATION: Aluminium with Black Powdercoating

SIZE: 3' x 3' Feet

DISPLAY TYPE: LED

LED TYPE: SMD, Highbright

LED COLOUR: Multicolour

INPUT: 230v AC

MOUNT: Wall mount

REALISTIC PPE IMAGES: Clear visuals for better awareness and compliance.

EASY KEYPAD OPERATION: Simple and user-friendly interface.

FASTER WORKER UNDERSTANDING: Promotes safety and reduces accidents



Scan product



Watch video

Ref: KT104001001SFCM4

Digital PPE Matrix Board Multicolor 4X3 Feet



FABRICATION: Aluminium with Black Powdercoating

SIZE: 4' x 3' Feet With 16 x 2 keypad

DISPLAY TYPE: LED

LED TYPE: SMD, Highbright

LED COLOUR: Multicolour

INPUT: 230v AC

MOUNT: Wall mount


REALISTIC PPE IMAGES: Clear visuals for better awareness and compliance.

EASY KEYPAD OPERATION: Simple and user-friendly interface.

FASTER WORKER UNDERSTANDING: Promotes safety and reduces acc...



Scan product



Ref: KT104001003ACCF

Safety LED Display Board Accident Free Days 4 x 3.5 Feet

Size: 4 Feet X 3.5 Feet

Pixel Pitch-P10

Connectivity : Lan and Mobile

Color -Red

Ip 65

Operate with 230V

The data is sent by our dedicated Android Mobile app (wireless)

They can sustain 40 degrees, but its advisable to put a canopy or under roof for a longer life span



Scan product

Ref: KT104001004X7WD

LED Single Side Clock Display Board 2 Feet X 6 Inch

Size 2 feet X 1 feet

6-inch character height

Red color


HH:MM: SS and Date and Month

P10

Outdoor



Scan product



Ref: KT10400100P46X4

Pollution Control Data Display Board P4 6X4 Feet



Pollution Control Data Display Board, Pixel Density: P6,
Dimension: 6 Feet X4 Feet
Pixel Density -P4
Outdoor
Multicolor
Module Size -192*192 mm
Module Pixel -32*32=1024dot
Input Voltage -230V
Dimension -6 Feet X4 Feet
Connectivity: LAN
SMD
MS Powder Coated with canopy(IP65)

Specification

LED Screen Name: P6 Outdoor Integrated 3 in 1 Full Color SMD Series
LED Class: Integrated 3 in 1 SMD Series
Pixel pitch: 4 mm



Scan product

Ref: KT10401200SLTRP


SR5MPRT for PC Monitoring SOLT



SR5-MPRT for PC Monitoring
Windows 10 or 11 with speaker and working USB port should be provided by the customer.
Frequency: 434.6500 MHz
Frequency stability: +/- 10 ppm
Data rate: 1800 bps
Channel space: 12.5 KHz
Modulation: FSK(+/- 3KHz)
Antenna Type: Helical type (internal)
PC interface: RJ45 to USB
Screen: LCD 1.3
Power/frequency: 10 mW.
Indicators: 2 LEDs (PWR/Rx indicator)...



Scan product



Ref: KT10401200W0KWC

Wireless Nurse Call System KWCS

Wireless Nurse Call System KWCS

Live Call Popup

Life time Data stored

Color coding for delayed calls

Export report in excel

Live call timers

Performance comparison chart

Specification

The Wireless Nurse Call System is designed to provide fast and reliable communication between patients and caregivers in hospitals, clinics, nursing homes, and assisted living faci...



Scan product

Ref: KT110013001DS01

Shoe Cover Dispenser Dolphy DSCD0001

Model No: DSCD0001

Material: ABS

Operation: Fully Automatic

Rated Power: 75W

Voltage: 220V / 50Hz

Loading Capacity: 50 Covers (Non-Woven)


Loading Capacity: 100 Covers (Plastic)

Fully Automatic Operation

Ideal for Hotel, Restaurant, Factory, and Shopping Malls



Scan product



Ref: KTI10016001ES82

Automatic Hand Sanitizer Dispenser Euronics EST82

Material : 304 Stainless Steel

Capacity : 1100 ML

Operation : Automatic Infra-Red Sensor

Power : Battery (4 x AA Alkaline Duracell)

Sensing Distance : 5~15cm



Scan product

Ref: KTI19003001100W

All in One Solar Street Light 100 Watt with Triple CAMERA

All in One Solar Street Light 100 Watt
with Triple CAMERA



No. of LED: 180 nos.

LED Power: 100watt

Solar Panel: 5v 25w

Life Po4 Battery 3.2v 24000Mah

Light Color: Cool White

Charging Time: 6-8 Hr/Lighting time: 12 Hrs*

Dimension: 60*25*18cm

Motion Sensor/Dawn to Dusk Sensor

Install Height: 4-5m / Application: Outdoor

Remote Control

Full HD IR Camera 5MP Each * 3 Came...


Specification

All in One Solar Street Light IP66

with Triple CAMERA V380 Pro Wi-Fi



Scan product



Ref: KT119003002A85W

All In One Solar Street Light 85w Royal Series Premium with Remote



All In One Solar Street Light 85w (Royal Series Premium) with Remote

No. of LED: SMD3030 432nos.

Solar Panel: 5v 85w Mono

Life Po4 Battery 3.2v 80000Mah

Led Power: 800w

Light Color: Cool White

Charging Time: 6-8 Hrs

Lighting Time: 12 Hrs*

Dimension: 90*45*7cm

Installation Height: Upto 15 Mtr

Dawn to Dusk Sensor

Application: Outdoor

Remote Control

Specification

All In One Solar Street Light IP65 85w
(Royal Series Premium) with Remote



Scan product

Ref: KT119003002B24W

All In One Solar Street Light 24w



All In One Solar Street Light 24w

No. of LED: SMD 5730 320nos.

Solar Panel: 5v 20w Mono

Life Po4 Battery 3.2v 24000Mah

Led Power: 120w

Light Colour: Cool White

Charging Time: 6-8 Hrs

Lighting Time: 14-18 Hrs*

Dimension: 63.5*25.5cm

Motion Sensor

Dawn to Dusk Sensor

Application: Outdoor


Remote Control

Specification

All In One Solar Street Light 24w
Reflector Model with Remote (4 window) IP65



Scan product



Ref: KT1000000EHTRON

Hand Dryer SS TRION Euroncis



Casing -Stainless Steel # 304 Grade
Operation -Infrared automatic
Hand Dry Time -20 Secs
Auto Cutoff -60 Secs
Motor-Brush Type
Speed - 36,000 RPM
Rated Power - 500W
Protection Class -IPX1
Blowing Volume -165m/H
Air Speed Medium- 85M/s
Dimension -263(L) x 97.9 (W) x 306.5(H)



Scan product

Ref: KT1000000SBE315

Swing Barrier SB E315




Product Size : 168*168*1000mm (L*W*H)
Pass width: 600 standard, 900mm Optional
Cabinet Material: Stainless Steel 304 Grade, Round tube of thickness $\delta=2.2\text{mm}$
Bar Material: Transparent Acrylic Thickness $\delta=10\text{mm}$
Movement: Servo motor-based Swing Gate movement
Drive Unit: 200W servo motor
Control Unit: Servo control system
Power Supply: 24V 500W
Power: 50W
Pass rate: 15-25 persons/mi...

Specification

0: Product Size : 168*168*1000mm (L*W*H)
1: Pass width : 600 standard, 900mm Optional
2: Cabinet Material : Stainless Steel 304 Grade, Round tube of thickness $\delta=2.2\text{mm}$
3: Bar Mater...



Scan product



Ref: KT101001002INF6

Visible Light Indoor Facial Recognition Indigo Face 6

Model Name: IndigoFace 6



Storage Capacity
Face Capacity : 2000
Finger Capacity : 10,000
Max. User: 2000
Log Capacity: 2,00,000
Card Capacity: 2000
Password Capacity: 2000

Features

Access control to secure your premises
Speedy recognition to avoid long queues
Good adaptation of dry, moist and rough fingerprint
Dual camera for live body sensing & observation
Strong metal build ...



Scan product

Ref: KT101001002NB1W

Multi Bio Attendance and Access Control Bio 101 W

Model Name: N-Bio101 W




Storage Capacity
Face Capacity: 2000
Finger Capacity: 5000
Card Capacity: 2000
Max User: 2000
Log Capacity: 1,50,000

Features

Good adaptation for dry, moist and rough fingerprints.
Output relay for door open.
Face, Fingerprint, Card, Password authentication
Supremely low Electric energy consumption.
Highly reliable and durable.
Comprehensive SDK is ava...



Scan product



Ref: KT101001002NBAS

Standalone Access Control Device With Card, Fingerprint and Password NBioAccess

Model Name : N-BioAccess

Storage Capacity

Finger Capacity: 10,000

Card Capacity: 10,000

Max Users: 10,000

Password: 10,000

Log Capacity: 2,00,000

Features:

High-Speed and Accurate Fingerprint Identification

Fingerprint, Card, Password authentication

Output relay for door open.

Supremely low Electric energy consumption.

Highly reliable and durable.

Comprehensive software devel...



Scan product

Ref: KT101001002NG4W

Multi Bio Attendance and Access Control NG4W

Model Name: NG4W

Storage Capacity

Face Capacity: 10,000

Finger Capacity: 30,000

Card Capacity: 10,000

Log Capacity: 2,00,000

Max User: 10,000

Features

World-class Face Identification Technology

High-Speed and Accurate Fingerprint Identification

Face, Fingerprint, Card authentication


2 output relay for door open.

Self-Service Inquiry

Good adaptation for dry, moist and rough f...



Scan product



Ref: KT101001002NUFC

Multi Bio Time Attendance and Access Control System N UltraFace

Model Name: N-Ultra Face Strong Light



Storage Capacity

Face Capacity: 3000

Finger Capacity: 30,000

Card Capacity: 3000

Max User: 3000

Log Capacity: 2,00,000

Features

World-class Face Identification Technology

High-Speed and Accurate Face Identification

Good adaptation for dry, moist and rough fingerprints.

Output relay for door open.

Face, Fingerprint, Card, Password authenti...



Scan product

Ref: KT101001002NX90

Standalone Access Control Device With Fingerprint and Password N-X90 GPRS

Model Name: NX90 + GPRS



Time Attendance and Access Control

Storage Capacity

Finger Capacity: 2000

Card Capacity: 2000

Max User: 2000

Password: 2000

Log Capacity: 1,50,000

Features

High-Speed and Accurate Fingerprint Identification

Fingerprint, Card, Password authentication


output relay for door open.

Good adaptation for dry, moist and rough fingerprints.

Supremely low Electr...



Scan product



Ref: KT101001002PRO1

Standalone Access Control Device With Finger Print And Password -N Access 10 Pro

Product Name: N-Access 10

Product Specification

Type Of System Fingerprint Recognition System

Sensor Type Optical Sensor

Type Of Attendance System finger+card

Brand Bio Max

Model Name/Number Access 10 Pro

Usage/Application fingerprint access control

Screen Size 2.4

Display Type Keypad

Language English

Installation Type Wall Mounted

Operating System Linux

FRR

Utility: A smar...



Scan product

Ref: KT101001002PRO3

Standalone Access Control Device With Face, Fingerprint And Password NBM300PRO

Model Name: N-BM300Pro

Storage Capacity:

Face Capacity : 500

Finger Capacity : 1,500

Card Capacity : 500

Max User : 500

Password : 500

Log Capacity : 1,00,000

Features:

high-Speed and accurate Face Identification

Good adaptation for dry, moist and rough fingerprints.


Face, Fingerprint, Card, Password & Authentication

Supremely Low Electric Energy Consumption

Highly Rel...



Scan product



Ref: KTI01001002SC40

Standalone Access Control Device With Card, Fingerprint and Password NSC403 Pro



Model Name: N-SC403 Pro

Storage Capacity
Card Capacity: 50,000
Max User: 50,000
Password: 50,000
Log Capacity: 2,00,000

Features


RFID & Password Identification
Accepting Card from 1 to 5 cm.
Less than 1 sec. card reading speed.
Supremely low Electric energy consumption.
Highly reliable and durable.
Comprehensive software development kit(SDK) is available for development and in...



Scan product

Ref: KTI01001002SS10

Standalone Access Control Device With Finger Print And Password - Access10

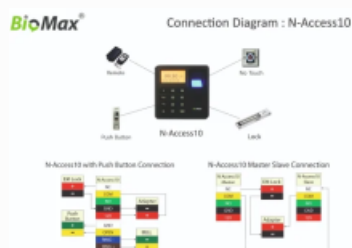


Product Specification
Model Name/Number ACCESS10
Brand BIOMAX
Usage/Application ACCESS CONTROL

Display Type LCD
Fingerprint Capacity 500
CARD CAPACITY 500
PASSWORD COUNT 2
Minimum Order Quantity 1
Product Description
Finger Capacity : 500
Card Capacity: 500 (non-standard)
Code count (Password) : 2

Utility: A smart lock is an electromechanical lock that is designed to perform l...



Scan product



Ref: KT101001002WL10

Standalone Access Control Device With Fingerprint and Password WL10



Model Name : N-WL10

Storage Capacity:

Fingerprint Capacity: 1000

Password : 1000

Max User: 1000

Log Capacity: 1,00,000

Feature:

High-Speed and Accurate Fingerprint Identification

Fingerprint, Password authentication.

"N-WL-10Simple USB based Biometric Attendance System

Good adaptation for dry, moist and rough fingerprints.

Supremely low Electric energy consumption.

Highly reli...



Scan product

Ref: KT101001002WL20

Standalone Access Control Device With Fingerprint and Password NWL20



Model Name: N-WL20

Storage Capacity:

Fingerprint Capacity: 1000

Password : 1000

Max User: 1000

Log Capacity: 1,50,000

Feature:

High-Speed and Accurate Fingerprint Identification

Fingerprint, Password authentication.

"N-WL-10Simple USB based Biometric Attendance System


Good adaptation for dry, moist and rough fingerprints.

Supremely low Electric energy consumption.

Highly reliab...



Scan product



Ref: KT101001002X990

Time Attendance and Access Control System NX990

Model Name: N-X990



Storage Capacity

Finger Capacity: 10,000

Card Capacity: 10,000

Max User: 10,000

Password: 10,000

Log Capacity: 1,50,000

Features

High-Speed and Accurate Fingerprint Identification

Fingerprint, Card, Password authentication

output relay for door open.

Supremely low Electric energy consumption.

Highly reliable and durable.

Comprehensive software development ...



Scan product

Ref: KT101001002Z900

Touch less face attendance system (Face + Card + Finger)

Brand : Timeoffice

Model Number : Z900 TOUCH-LESS FACE ATTENDANCE SYSTEM (FACCE+ FINGER+CARD)

Backup Options :PENDRIVE, LAN OR , TCP/IP

LCD :Yes

LCD Resolution :128X68

Scratch Proof :Yes

Identification Method :Face, Card, Fingerprint

Fingerprint Capacity :1000


Card Capacity :1000

Power Requirement : 12V,1.5A

Type : Access Control, Time & Attendance



Scan product



Ref: KTI01002003AIJU

Face Reader AiFace-Jupiter, ESSL Without Battery



Visible Light Facial Recognition

- Better hygiene with touchless biometric authentication
- Anti-spoofing algorithm against print attack (laser, color and B/W photos), videos attack and 3D mask attack
- Available card modules: 12.5 KHz EM card / 13.56MHz IC card (MF)
- Supplement light with adjustable brightness
- Multiple Verification Methods: Face / Fingerprint / Card / Passw...



Scan product

Ref: KTI01002003AINP

Face Reader AiFaceNeptune, ESSL with Battery wifi



Neptune Linux-Based

Time Attendance and Access Control System Visible Light Facial Recognition

Features:

Visible Light facial recognition

Card modules (optional): 125KHz ID Card (EM) / 13.56MHz IC Card


Anti-spoofing algorithm against print attack(laser, color and B/W photos), videos attack and 3D mask attack

Multiple verification methods : Face / Password / Card (optional)

Back...



Scan product



Ref: KT101002003FD8L

Face, Card FaceDepot8AL

Intelligent energy-saving design; precisely evaluation of the distance (up to 2.5m (8.2ft)) between the user and the device by

a microwave detector before waking up the recognition terminal

- 2MP starlight CMOS sensor camera with WDR function, which enables the terminal to recognize faces under extreme lighting

conditions (0.5 lux – 50,000 lux)

Access Control Interface Lock Rel...



Scan product

Ref: KT101002003NG4W

Face, Finger, Card, Password Based N G4W with wi fi & Battery

Storage Capacity :

Face Capacity : 10,000

Finger Capacity : 30,000

Card Capacity : 10,000

Log Capacity : 2,00,000

Max User : 10,000



Communication : WI-FI, TCP ,/IP , RS 232 /485, USB

4G GPRS : Optional, Sensor type : 500 DPI

RF card options : 125khz EM (Standard /13.56mhz Miface (optional)



Scan product

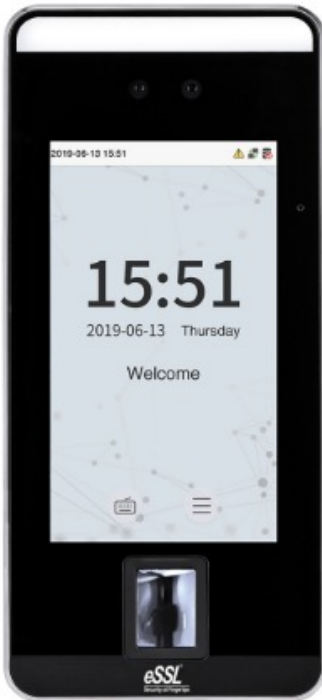

Ref: KT10100200MUAIA

Face, Finger, Card, Aiface Arion ESSI

Display 5-Inch
Camera WDR Low Light Camera @ 2MP
Operation System Linux
Hardware CPU: 1.GHz Dual Core
RAM: 1GB
ROM: 8GB
Authentication Method Face , Fingerprint , Card , Password
(Virtual Keypad)
Fingerprint Template Capacity 6,000 (1:N)
Face Template Capacity 6,000 (1:N)
Card Capacity 10,000 (1:N)
Transaction Capacity 200,000 (1:N)
Biometric Verification Speed Fingerprint:...



Scan product

Ref: KT101003001CO03


Interlocking System 3 Door

3 Door Interlocking Systems
(Model: SPL-DIS-0-3D-0-L1)
Controller in ABS Plastic Enclosure with Din Rail Mounted: 01
No,
SS Duel LED(red & Green) Switch with Plate: 06 No's
SS Emergency D/O Switch with Plate(without LED): 03 No's
600 LBS Magnet with feedback Sensor: 03 No's,

No image



Scan product



Ref: KT101003001DR06

Interlocking System 6 Door

EXCLUDING AC:
Buzzer indication in controller.
Switch for open door.
Emergency Exit Switch.
600 LBS magnet – 6 no.
Switch for 6 Door 8 no.



Scan product


Ref: KT101004003GA60

Digital Lock GA 60 B 4 Way Bluetooth

Manufacture competitiveness: Annual capacity, 5M units
·Product line-up: Accumulated over 500 models
·Quality assurance: 56 types of strict tests
·Technology: Holding over 50 patents
Installation Wooden & Steel Door Door Thickness 40-70mm
PIN Code 4-12 Digit
Fingerprint Up to 100 fingerprint can be registered
Smart Card Up to 100 smart card can be registered
Physical key 2PCS ...



Scan product



Ref: KT10100400DG201

Digital Lock Dorset DG 201

Digital Lock Dorset DG 201

ACCESS MODES

1. 360° Fingerprint ID (Up to 100 unique access)
2. RFID Card (Up to 100 unique access)
3. Pin
4. Mechanical Key
5. Video Door Phone and Home Automation Compatibility (Optional)

Smart Features: Anti-Theft Password, Drained Battery Quick Fix, Dual Authentication

Alarms: Low Battery Alarm, Fire Detection Alarm, Intrusion Alarm

Locking Mode...

Specification

The ZEST DG 204 Mortise Digital Door Lock is designed for secure access control in homes, offices, and apartments. It provides convenient keyless entry with enhanced security and m...



Scan product

Ref: KT10100400DG202

Digital Lock Dorset DG 202

Digital Lock Dorset DG 202

ACCESS MODES

1. 360° Fingerprint ID (Up to 100 unique access)
2. RFID Card (Up to 100 unique access)
3. Pin
4. Mechanical Key
5. Mobile Access (WIFI)
6. Video Door Phone and Home Automation Compatibility (Optional)

Smart Features: Anti-Theft Password, Drained Battery Quick Fix, OTP Access


Alarms: Low Battery Alarm, Fire Detection Alarm, Intrusion Ala...

Specification

The ZEST DG 204 Mortise Digital Door Lock is designed for secure access control in homes, offices, and apartments. It provides convenient keyless entry with enhanced security and m...



Scan product



Ref: KTI0100400DG204

Digital Lock Dorset DG 204

Digital Lock Dorset DG 204

ACCESS MODES

1. 360° Fingerprint ID (Up to 100 unique access)
2. RFID Card (Up to 100 unique access)
3. Pin
4. Mechanical Key
5. Mobile Access (WIFI)
6. Video Door Phone and Home Automation Compatibility (Optional)

Smart Features: HD Video Camera, 2-Way Intercom, Drained Battery Quick Fix

Alarms: Low Battery Alarm, Fire Detection Alarm, Intrusion Alarm...

Specification

The ZEST DG 204 Mortise Digital Door Lock is designed for secure access control in homes, offices, and apartments. It provides convenient keyless entry with enhanced security and m...



Scan product

Ref: KTI0100400GADCL

Godrej Advantis Digital Cabinet Lock

Advantis Digital Cabinet Lock

Product No.: 2999

Type: Digital Cabinet Lock

Application: Wooden cabinets / drawers / lockers (swing doors only)

Access Mode: Password (PIN)

Password Length: 4-9 digits

Password Capacity: Up to 14 users


Power Supply: 9V battery

Material / Finish: Black finish

Warranty: 1 year



Scan product



Ref: KTIO100400PDGPR

Digital Lock Dorset DG 204 Pro

Digital Lock Dorset DG 204 Pro

1. 360° Fingerprint ID (Up to 100 unique access)
2. RFID (Up to 100 unique access)
3. Pin
4. Mechanical Key
5. Mobile Access (WIFI)
6. Doorbell Gateway

Smart Features: HD Video Camera, 2-Way Intercom, Drained Battery Quick Fix

Alarms: Low Battery Alarm, Fire Detection Alarm, Intrusion Alarm

Locking Mode: Manual / Auto Locking Mode, Privacy Locking...



Specification

The ZEST DG 204 Mortise Digital Door Lock is designed for secure access control in homes, offices, and apartments. It provides convenient keyless entry with enhanced security and m...



Scan product

Ref: KTIO100400PNPS1

Smart Glass Door Lock Series 1 Pro Phlipton

Smart Glass Door Lock Series 1 Pro Phlipton

Power Supply : 4.5V-6V (4 pcs AA Cell power)

Unlock Methods : Fingerprint / RFID card

Passcode / Mechanical Key / Application

Quiescent Current :




Specification

The Phlipton Series 1 Pro is a versatile smart biometric door lock designed for wooden and residential doors. It features five convenient unlocking methods: fingerprint, passcode, ...



Scan product



Ref: KT10100408DG104

Digital Lock Dorset DG 104

Digital Lock Dorset DG 104

ACCESS MODES

1. 360° Fingerprint ID (Up to 100 unique access)
2. RFID Card (Up to 100 unique access)
3. Pin
4. Mechanical Key
5. Mobile Access (WIFI)
6. Video Door Phone and Home Automation Compatibility (Optional)

Smart Features: Universal Handed Operation, OTP Access, Drained Battery Quick Fix

Alarms: Low Battery Alarm, Fire Detection Alarm, Intrus...

Specification

The ZEST DG 204 Mortise Digital Door Lock is designed for secure access control in homes, offices, and apartments. It provides convenient keyless entry with enhanced security and m...



Scan product

Ref: KT10100408RC100

Yale Remote Control For Smart Locks

Yale Remote Control For Smart Locks

Model : Yale RC 100


Optional remote control for unlocking your front door.

Specification

Smart, Secure and Convenience for Your Glass Door smart lock gives you simplified control on protection for glass door. It offers advantages to those who are searching for better ...



Scan product



Ref: KT10100408RKYRA

Digital Lock Yale Kyra Pro

Product Key Features:

Yale Home
Biometric
PIN Code
RFID Card
Upto 5 Years Warranty
Mechanical Key
Remote Control
WiFi
Bluetooth



Biometric: Available
PIN code: Available
RFID keytag: Available
Remote control: Optional (sold separately)
Mechanical key override: 2 pcs available
Color: Matt Black / Champagne Gold Trimming
Front body: 78 (W) × 390 (H) × 50 (D) mm
Back body: 76 (W) ...



Scan product

Ref: KT1010040GGM10

Digital Door Lock With finger Access

Model : GM1000BK

Up to 100 Fingerprints / Up to 100 RFID Cards can be registered

4 Pin Number registration (4-12 Digit)

Auto-Lock, Re-Lock, Double Lock Function □Random Number and Multi-touch Feature

In case of emergency, use the mechanical key to open the door

Home Network, Remote Control, Bluetooth and Wi-fi Bridge (Optional)

Front Body Dimension: 50(W) X 270(H) X 23(D)mm



Scan product