




Product Catalogue

## Automatic Entry Solutions

Automation > Automatic Entry Solutions



KT Automation Private Limited · D 32-33 Kamalanjali Commercial Complex,  
Radhakrishna Crossing, Akota · 390020 Vadodara



Ref: KT104007001PHSW

### **Safety Photosensor**

Safety Photosensor For Multiple Uses.  
With NO,NC Facility  
Power : 12V DC.



Scan product




Ref: KT190006001PB3S

### **Push Button 3 Switch Set Green, Blue, Red Normally Open**

Push Button Set With Three Switches (Green + Yellow + Red)  
used for Manual Operation as and when required  
\* Color Combination Can Be Changed on Request.  
\* NO/NC Combination Can Be Changed on Request.  
\* Push Button Size and Appearance Subject to Change  
Without Prior Notice.  
Warranty:- Not Applicable



Scan product



Ref: KT102002001BOO6

## Boom for Boom Barrier 6 Meter

Boom for Boom Barrier  
Size: 6 Meter



Scan product

Ref: KT102002001LPDT

## Loop Detector


Loop Detector used In Exit for Automatic Exit  
1.5 sq mm Cable to Be Used to for Automatic Gate Open in  
Exit or Entry  
Loop Created Under the Ground



Operating voltage- 220V AC  $\pm 10\%$   
Power Consumption:-  $\leq 5VA$   
Output Relays:- 240V/5A AC  
Frequency Range:- 20 kHz to 170 kHz  
Reaction Time:- 10ms  
Loop Connection Wiring:- Maximum Length 20 Meters  
Twisted at Least 20 Times Per Meter  
Ope...



Scan product



Ref: KT102002001RTSW

### **Remote for Boom Barrier**

Remote For Boom Barrier  
Can Operate From Approx 5-7 Meter Distance



Scan product


Ref: KT190006001PB2S

### **Push Button 2 Switch Set Green, Red**

- \* Push Button Set With Two Switches (Green + Red)
  - \* Color Combination Can Be Changed on Request.
  - \* NO/NC Combination Can Be Changed on Request.
  - \* Push Button Size and Appearance Subject to Change Without Prior Notice.
- Warranty:- Not Applicable



Scan product



Ref: KT102002001RSPL

## Resting Pole For Boom Barrier

Resting Pole For Boom Barrier



Scan product


Ref: KT1010050011DCB

## 1 Door Controller For Boom Barrier

1 Door Controller For Boom Barrier designed to provide reliable and efficient control over the movement of the boom arm, ensuring smooth and safe passage for vehicles. Enable or Disable any Tag with 1 door controller for restriction to vehicles entering designated area.



Scan product



Ref: KT190006001CNTR

## Controller For Boom Barrier

Controller For Boom Barrier

(Image for representative purposes only, controller subject to change, based on boom barrier make and model).



Scan product

Ref: KT102008004KJZ03

## Mounting stand ZKKJZ03

Mounting stand ZK-KJZ-03

Model: KJZ-03

Material: Steel

Mounting: Vertical (lathe integration)

Dimensions: Height: 414 mm

Compatibility: ZK-PROFACE-X, ZK-SPEEDFACE-V4L, ZK-SPEEDFACE-V5L

Weight: 1.5 kg

Vertical holder for facial recognition devices

For use on turnstiles and Flap barriers

Height of 414 mm

Made of steel

For indoor or outdoor use




### Specification

The ZKTeco KJZ-03 Stainless Steel Mounting Pedestal Stand for Face Terminals is the authentic original part — engineered to drop straight into compatible systems. Furthermore, it s...



Scan product



Ref: KT102002001LMSW

## Limit Switch For Boom Barrier

Limit Switch For Boom Barrier.

Warranty:- Not Applicable



Scan product

Ref: KT10200200DBGM400

## Boom Barrier Without LED 4 to 6 Meter Length DC motor BGM 400

Boom Barrier

Make:-Zketeco

Model No.: BGM 400


- The fastest operating speed is 1.5s, the speed can be adjusted according to different boom arm length.
- Digital control monitoring, support delay automatic close functions.
- High safety, support power off manually rise boom arm, anti - smash functions.

Model BG300


Operating Speed 1.5-6s

Boom Length Max 4.5m

Boom Type Telescopi...

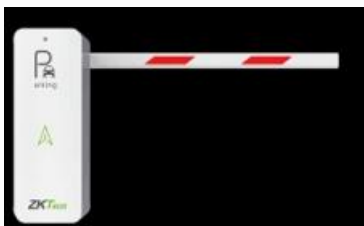

Scan product



Ref: KT10400700DPMLS

## Magnetic Limit Switch Ditec

Magnetic Limit Switch  
Group6CS14FM



DITEC Magnetic sensor



Scan product

Ref: KT10400700DSSLS

## Sliding Shoe for Magnetic Limit Switch Ditec


Sliding Shoe for Magnetic Limit Switch  
NC6CS230PFM



DITEC L/R Sliding shoe  
limit switch



Scan product



Ref: KT10200200KT600L

## **KTI Boom Barrier Glass Finish 4 to 6 Meter Length DC motor**

Automatic boom barriers are used to control vehicular movement on places where access control is required to ensure that only authorized personnel can access the premises.

An aluminium Bar rises in a vertical arc to allow the movement of vehicles.

BLDC motor is more powerful and requires almost no maintenance. All the operation process is soft without any noise and shaking

Boom...



Scan product

Ref: KT102010001HT58M

## **Electro Mechanical Tyre Killer**


TYRE KILLER PROVIDES AN ADVANCE OPERATION TO CONTROL ACCESS SMOOTHLY AND EFFECTIVELY BY BASIC OPERATION, AND ALSO PREVENT ILLEGAL IN AND OUT. THE MACHINE IS WELL IN DESIGN, RUSTPROOF, DURABLE AND CAN RESIST EXTERNAL DESTROY. ACCORDING TO DIFFERENT MACHINE CENTERS, INTELLIGENT DRIVE UNIT THROUGH ADVANCED CONTROL UNIT CAN BE DIVIDED INTO FULLYAUTOMATIC AND SEMI-AUTOMATIC. THEIR D...



[Watch video](#)



Scan product



Ref: KT104007001PHSP

### **Safety Photosensor Premium**

Safety Photosensor For Multiple Uses.

Range : 18 to 22 Mtr

With NO,NC Facility

Power : 12V DC.



Scan product


Ref: KT190006001PB1S

### **Push Button Single**

- \* Push Button Set With One Switches (Green Or Red)
- \* NO/NC Combination Can Be Changed on Request.
- \* Push Button Size and Appearance Subject to Change Without Prior Notice.



Scan product



Ref: KT102002001HSRD

## High Speed Roll Up door



Curtain Details PVC Coated Fabric Make SIOEN (Belgium)

- European make- most innovative & superior PVC Coated Fabrics for High Speed Doors
- Make: SIOEN, Belgium are Both sides Acrylic lacquered & dimensionally stable
- option of high-quality HP Latex Branding
- Cut on fully automated Cutting Machine from ZUND, Switzerland
- High Frequency Welded on FORSSTROM- Swedish make Weld...



Scan product


Ref: KT10200200FRSPL

## Floating Resting Pole For Boom Barrier

Floating Resting Pole For Boom Barrier



Scan product



Ref: KT190006001CNTS

## Controller For Sliding Gate

Controller For Sliding Gate



Scan product


Ref: KT10400700DPEBC

## Electric Break Coil Ditec

Electric Break Coil 62656



Scan product



Ref: KT102006010AZ10

## Swing gate Motor AZSW109A/1000KG

KIT INCLUDES Operator (1000Kg)- 2 No'sControl unit  
AZSWDC228- 1 noBOLT-TRANSMITTER- 2nos (AZ-T23B)



Swing Roller gate operator is Designed to move gates  
Installed in Heavy Industrial and Commercial Buildings  
Easier to drive the gate motor is Mounted on the far end  
from hinged point  
Spring enhances the tolerance capacity against the uneven  
surfaces of the road up to 80 mm  
Unl...



Scan product

Ref: KT102017TS2000P

## Tripod Turnstile TS2000 Plus Zkteco

TS2000 Plus Series

Drop arm tripod turnstile. Improve the turnstile reliability and efficiency.


The durable SUS304 stainless steel housing ensures that the device can be anti-rust. Certified by Salt spray test 72 hours. Waterproof -Passed the self-laboratory test which is equivalent to IPX4 protection rating.

Arm loading

The stainless steel arm has a 38mm diameter of rod. It pr...



Scan product



Ref: KT102002001AUZ6

## Boom Barrier 6 Meter with Skirting

STAR-FENCE BLDC BOOM BARRIER  
Model no. AZBB115/AZBF036M  
BLDC BARRIER - AZBB115  
FENCH BOOM 6MTR - AZBF036M  
TRANSMITTER - AZBLDCTX22 - 2 NOS



Scan product

Ref: KT102003002NS34

## Retractable Gate 1.8 Meter Height SS 304 No See Through

Retractable Gate  
Material:- Stainless Steel 304  
No See Through  
Height:- 1.9 Meter  
Length:- As per requirement  
Width:- 0.66 Meter  
Power:- 370 W  
Thickness:- 0.5 mm  
Main Material:- 50 \*51\*0.5 mm  
Vice Material:- 48 \*33\*0.5 mm


Release Key:- 2 PCS  
Control Panel:- 1 PCS  
Remote Control:- 2 PCS

Fix LED Screen Display (Both Side)  
Front:- Welcome  
Back:- Safe Trip  
Imprint the company log...



Scan product

No image



Ref: KT102006002844C

## Sliding Gate Motor 1800 KG FAAC



Model 844 C Z16  
Power supply 220 - 240 V ~ @50/60 Hz  
Max power 230 W  
Pinion Z16 Module 4  
Max. thrust force 1300 N  
Max leaf weight 1800 kg  
Max. leaf speed 9.6 m/min  
Max leaf width 40 m  
Stopping space 30 mm  
Intended use Industrial/Commercial/Residential  
Use frequency High traffic  
Protection rating IP44  
Operating temperature -20°C to +65°C  
Start-up capacitor 18 µF  
Thermal protecti...



Scan product

Ref: KT10400700DPHSL


## Ditec Safety Photosensor LIN2



Photocell Model LIN2  
Outside photocell - card that can be oriented in three positions  
Capacity -Configurable 10 m - 30 m max  
POWER SUPPLY - 24 Vdc - 24 Vac  
POWER INPUT - Max 50 mA  
RELAY CAPACITY - 24 Vdc / 1 A max  
Temperature --20°C ÷ +55°C  
Protection rating -IP44



Scan product



Ref: KT102006002M60

## Sliding Gate Motor 600 KG

Sliding Gate Motor -AZSL100B

1) Operator only 220V AC Operator AZSL100B- 1

No (including Operator+ control board +Base plate + Magnet limit + Fixing

Accessories)2)TRANSMITTER (AZT30A) - 1 Nos

Sliding Gate Motor -AZSL100B

Model -AZSL100B

Power supply -220V AC

Motor powe -370 W

Gate moving speed -11 - 13 m / min

Maximum weight -600 Kg

Transmi????er Distance -≤ 30 m

Limit switch ...



Scan product


Ref: KT104007001SAFE

## SAFETY PRODUCTS

SAFETY PRODUCT



Scan product



Ref: KT10400700DPBCK

## Brake component Kit Ditec

Brake components kit NC6CS18KF



Scan product

Ref: KT1160260023MY

## Road Stud Without Shank Make 3M

Performance Feature: Day And Night Visibility

Directionality: Two-way

Size: 100 MM x 90 MM x 18 MM

Material: PLastic

Height: 18 MM

Width: 90 MM

Weight: 100 Gms

Color: Yellow With Yellow Reflector

White With White Reflector


White With Red Reflector

Suggested Applications: Road Edge Line, Road Center Line, Pedestrian Crossing

Warranty:- Not Applicable



Scan product



Ref: KT10200800SBTL3

## Single Lane Swing Barrier Turnstile SBTL300



### Reliability

- SUS304 stainless steel casework ensure long-lasting durability.

- High quality electrical components.

### Safety Features

- Barriers unlock automatically during power outage.

- All smooth

Power Requirements - AC110V/220V, 50/60HZ

Working Temperature -20°C ~ 70°C

Working Humidity 5% ~ 95%

Infrared Sensor 4 pairs

Working Environment Indoor/Outdoor (if shelter)

Max. Spe...



Scan product

Ref: KT102008004FB70

## Single Lane Flap Barrier FBL 700 Zkteco



Model No. : FBL 700

Power Requirements AC100 ~ 120V/200 ~ 240V, 50/60Hz

Working Temperature -28°C ~ 60°C

Working Humidity 5% ~ 80%

Working Environment Indoor/Outdoor

Max. Speed of Throughput 30 people per minute

Lane Width (mm) 600

Dimension (L\*W\*H) 1200 \* 300 \* 980 (mm)

LED Indicator Support


Cabinet Material SUS304 Stainless Steel

Lid Material SPCC (with black baking paint)

Ba...



Scan product



Ref: KT102002001RELY

## Relay

Relay for Multiple use.



Scan product

Ref: KT104007001PHWW

## Wireless Safety Photosensor


Wireless Safety Photosensor For Multiple Uses.

With NO,NC Facility

Power : 12V DC.



Scan product



Ref: KT102008004FB52

## Single Lane Flap Barrier FBL 520 Zkteco



Model Name -FBL520  
Barrier Material -Acrylic  
Barrier Movement -Retracting  
Cabinet Material -SUS304 Stainless Steel  
Dimension (L\*W\*H) -1360 \* 280 \* 980 (mm)  
Emergency Mode -Support  
LED Indicator -Support  
Lane Width (mm) -600  
Lid Material -SUS304 Stainless Steel  
MCBF -2 million  
Max. Speed of Throughput -30 people per minute  
Opening Noise -≤30dOpening Time -0.8s



Scan product

Ref: KT102002001B614

## Boom Barrier Without LED 6 Meter Length




Model B614  
Make : FAAC  
Maximum Anti-crushing safety and motor with integrated encoder  
• Speed adjustment and smooth operation.  
• Integrated control unit in the upper part of the beam body, i.e easy maintenance and intuitive programming

Power supply voltage 220-240V ~ 50/60 Hz  
Electric motor With brushes 24V  
Max. power 165 W  
Max. torque 300 Nm  
Material type Steel  
Type of treatm...



Scan product



Ref: KT102008004FB50

## Single Lane Flap Barrier FBL 500 Zkteco



Model Name -FBL500  
Barrier Material -Acrylic  
Barrier Movement -Retracting  
Cabinet Material -SUS304 Stainless Steel  
Dimension (L\*W\*H) -1360 \* 280 \* 980 (mm)  
Emergency Mode -Support  
LED Indicator -Support  
Lane Width (mm) -600  
Lid Material -SUS304 Stainless Steel  
MCBF -2 million  
Max. Speed of Throughput -30 people per minute  
Opening Noise -≤30dOpening Time -0.8s



Scan product

Ref: KT10200600D800

## Sliding Gate Motor Ditec NEOS Series 800kg




Sliding Gate Motor Ditec NEOS Series NEOS 800G 800kg

Max. leaf weight- 800kg  
Stroke control - limit switch +virtual encoder  
Maximum opening - 20 m  
Duty class - 4 - heavy duty  
Power supply- 230 Vac - 50/60 Hz  
Motor power supply- 24 Vdc  
Power input- 1,5 A  
Thrust - 800 N  
Opening and closing speed - 0.1 - 0.24 m/s  
Release system for manual opening - key operated



Scan product

Intermit...



Ref: KT1020060AZ106A

## Swing gate Motor AZSW106A 300KG

KIT INCLUDES Operator (300Kg)- 2 No'sControl unit  
AZSWDC228- 1 noBOLT-TRANSMITTER- 2nos (AZ-T23B)



Swing Roller gate operator is Designed to move gates  
Installed in Heavy Industrial and Commercial Buildings  
Easier to drive the gate motor is Mounted on the far end  
from hinged point  
Spring enhances the tolerance capacity against the uneven  
surfaces of the road up to 80 mm  
Unli...

### Specification

#### PRODUCT DESCRIPTION:

- o The swing gate operator is applicable for all gates with the weight of the single-leaf gate up to 300 kg and the width of each swing gate should be 2.5m/3m
- o...



Scan product

Ref: KT102006001800

## Sliding Gate Motor Ditec Cross18VEP LCA85

Sliding Gate Motor Ditec CROSS Series CROSS18EP 1800kg



Electromechanical actuator for sliding gates up to 1800 kg

Stroke control lever-operated mechanical stop

Capacity 1800 kg

Service index intensive - up to 350,000 cycles

Intermittent operation S2 = 60 min - S3 = 55%


Cycles / hour \* 19

Consecutive cycles \* 33

Power absorption 230 Vac - 50 Hz (60 Hz version on request)...



Scan product



Ref: KT102006002844P

## **Sliding Gate Motor 2200 KG FAAC**

Model No. 844 R 3 PH

Make : FAAC

for commercial and industrial sliding gates with max weight of 2.200 kg (Z12)

Power supply- 400 Vac (3ph)(+6%-10%) 50 (60) Hz

Absorbed power -950 W

Motor rotation speed-1.400 rpm



Scan product

Ref: KT102006002M24

## **Sliding Gate Motor MCVICK 2400 kg**

Sliding Gate Motor

Make: MCVICK

Power Supply: 230 V AC

Power: 250 W

Torque :22.5nm


Travel speed :11m/min

Protection Level: IP 44

Operation Temperature:□40°C ~ +55°C



Scan product



Ref: KT102008004FB72

## Dual Lane Flap Barrier FBL 720 Zkteco

Model No, : FBL 720

Power Requirements AC100 ~ 120V/200 ~ 240V, 50/60Hz

Working Temperature -28°C ~ 60°C

Working Humidity 5% ~ 80%

Working Environment Indoor/Outdoor

Max. Speed of Throughput 30 people per minute

Lane Width (mm) 600

Dimension (L\*W\*H) 1200 \* 300 \* 980 (mm)

LED Indicator Support

Cabinet Material SUS304 Stainless Steel

Lid Material SPCC (with black baking paint)

Ba...



Scan product

Ref: KT102008004SATU

## Single Lane Saturn 1000

Model : Saturn -1000

Visual Indicator -Steady Green

Visual Indicator

Top LED indicator:

Blue = Door closed / stand by

Green = Door opening

Red = Door closing / alarm

Lane Type

Saturn-S1000: Single lane

Lane Width-650mm (Standard)

Barrier Movement Type-Swing


Motor- DC brushless motor

Movement Speed -Average 1s per movement (Adjustable open/close timing)

Door leaf Material :...




Scan product



Ref: KT10200800SAT12

## Single Lane Saturn S1200

Dual Swing(for additional lane)  
 650mm (Standard)  
 Motor DC brushless motor  
 Movement Speed -Average 1s per movement (Adjustable open/close timing)  
 Lid Material -Polycarbonate+2.5D tempered glass  
 Power Supply -110V / 220V  $\pm 10\%$  AC @50Hz/60Hz  
 Noise Level -Less than 60dB  
 MTTR-Less than 60 minutes  
 MCBF -3 Million

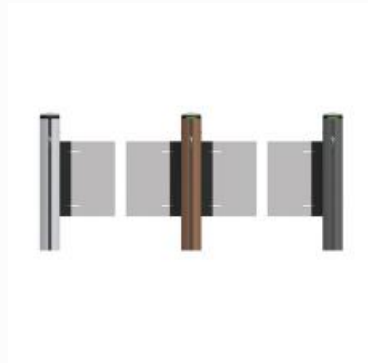

Scan product

Ref: KT1020170ESTRIP

## Tripod Turnstile ESSL Model No ET 1000

Model No.: ET1000:HeavyDutyTripodTurnstile

Specifications

Passage Width: $\leq 550$ mm  
 Throughput rate:35p/m  
 Power Supply:100~240V  
 Operational Voltage:24V  
 Max Power Consumption:30W  
 Frequency:50~60hz  
 Protection Level: $\geq 44$   
 Working Temperature:-25~+70OC  
 Electro-magnetic Drive: DC  
 Dimension Excluding Bar:480x280x980mm


Features

Controller

- ☐ Semi-Automode
- ☐ Pure Mechanical mode
- ☐ Single or Bi-directio...



Scan product



Ref: KTI020170MPT333

## Full Height Turnstile MPT 333(4X90)

Magnetic High Turnstile Swing Entry Gate MPT 333 4wing

Model No: MPT-333C-A410 (MPT-333(4X90))

Number of Wings (Angle): 4 (90°)

Throughput: Approx. 20

Drive Technology: Electro-Mechanical

Control System: MGC

Safety System: -

Voltage: 100-240 V AC, 50-60 Hz

Power Consumption: Approx. 40 W (Without Accessories)

Duty Cycle: 100%

Enclosure Rating: IP43 (IP54 Optional)

Dimensions (L...



### Specification

MPT full-height turnstiles are the ideal solution for access control in outdoor areas when large numbers of people need to enter or leave an area in a short time.

Reliable securin...



Scan product

Ref: KTI000000SBE315

## Swing Barrier SB E315

Product Size : 168\*168\*1000mm (L\*W\*H)

Pass width: 600 standard, 900mm Optional

Cabinet Material: Stainless Steel 304 Grade, Round tube of thickness  $\delta=2.2\text{mm}$

Bar Material: Transparent Acrylic Thickness  $\delta=10\text{mm}$

Movement: Servo motor-based Swing Gate movement

Drive Unit: 200W servo motor

Control Unit: Servo control system

Power Supply: 24V 500W

Power: 50W

Pass rate: 15-25 persons/mi...



### Specification

0: Product Size : 168\*168\*1000mm (L\*W\*H)


1: Pass width : 600 standard, 900mm Optional

2: Cabinet Material : Stainless Steel 304 Grade, Round tube of thickness  $\delta=2.2\text{mm}$

3: Bar Mater...



Scan product



Ref: KTI02001001BGHB

## **BGI K4 Crash Rated Hydraulic Bollard**

BGI K4 Crash Rated Hydraulic Bollard

Model no.B3150

Accessories : Including control panel, Push button  
,photosensor for humansafety,High Range Reciver,  
High Range Remote Control,Loop detector



Drive Hydraulic

Cylinder Diameter 220 mm

Cylinder Length 700 mm

Rating K4 Rating

Cylinder Material ST 37

Special Stainless Steel cover SS 304

Cylinder Surface Treatment Hot Dip galvanized...



Scan product

Ref: KTI02002001BOO8


## **Boom for Boom Barrier 8 Meter**

Boom for Boom Barrier

Size: 8 Meter



Scan product



Ref: KT102002001LDIT

## Loop Detector - Industrial Grade

Loop Detector Industrial Grade used In Exit for Automatic Exit

Dual Channel Metal Detector Vehicle Loop Detector for Parking Lot Access Control

1.5 sq mm Cable to Be Used to for Automatic Gate Open in Exit or Entry

Loop Created Under the Ground



Model No.: 220S

Specifications:

- Supply voltage: AC220V
- Loop quantity: 2
- Output interface: four relay
- Sensitivity: 10 class adjust...

### Specification

Specifications:

- Supply voltage: AC220V
- Loop quantity: 2
- Output interface: four relay
- Sensitivity: 10 class adjustable
- Output Delay: no
- Sensitivity: adjustable in 3 increments...



Scan product


Ref: KT102002001LGDC

## Display Counters for Led Guided Parking

Display Counters for LED Guided Parking system



Scan product



Ref: KT102002001LGMC

## Master Controller for Led Guided Parking

Master Controller for LED Guided Parking system



Scan product




Ref: KT102002001LGPS

## Sensors for Led Guided Parking

Sensor for LED Guided Parking system



Scan product



Ref: KT102002001LGZC

## Zonal Controller for Led Guided Parking

Zonal Controller for LED Guided Parking system



Scan product

Ref: KT102002001LMDB


## Main Display Board for Led Guided Parking

Main Display Board ( 4 floors )

| TOTAL PARKING  | 143 | NO. OF PARKING | PARKING AVAILABLE |
|----------------|-----|----------------|-------------------|
| GROUND LEVEL   | 9   | 9              |                   |
| UPPER BASEMENT | 84  | 84             |                   |
| LOWER BASEMENT | 50  | 50             |                   |



Scan product



Ref: KT102002001MRIS

## Industrial sectional door

Industrial sectional door  
Warranty:- 1 Year No on-site



Scan product


Ref: KT102002001RTBB

## Remote for Boom Barrier Came

Remote For Boom Barrier- Came  
Can Operate From Approx 5-7 Meter Distance



Scan product



Ref: KT102002001SPRG

## Balancing Spring For Boom Barrier

Boom Barrier Spring for specific models. Use only after technical approval. Installation by certified technician only.



×



Scan product

Ref: KT102002006NEP6


## Boom Barrier 8 Meter PowerFusion XD Neptune



AUTOMATIC BARRIER MODEL - PowerFusion XD Supply,  
 installation, testing and commissioning of Boom Barrier:  
 Application Environment Condition Indoor / Outdoor Drive  
 Motor: Electro-Mechanical DC Brushless Protection Degree:  
 IP 65  
 Power Supply: 230V AC  
 CE Certified  
 High torque bi-direction 24VDC BLDC motor for heavy and  
 continuous Traffic  
 Modern design with removable top cover.  
 V...



Scan product



Ref: KT10200200DEQ80H

## Boom Barrier 8 meters without light and LEDs FAAC B680H



Boom Barrier 8 meters without light and LEDs FAAC B680H

Power supply 100 ÷ 240 ~ 50 (60) Hz

Electric Motor 36 Vdc Brushless

Absorbed power 240 W

Absorbed current 1,1 A/230 V

Motor rotation speed 1.000 ÷ 6.000 RPM

Pump capacity 3,2 l/min (max)

Electronic deceleration Absolute encoder

Operating ambient

temperature -15°C ÷ +65°C

Weight 85 kg (65 kg body +

20 kg housing)

Oil type...

### Specification

The B680H has an Hybrid heart which, together with its "everlasting" springs, allows it to exceed 2,000,000 cycles of continuous-use, raising 8 m beams in less than 6 seconds, in t...



Scan product

Ref: KT10200200DTQ7EH

## Boom Barrier Ditec QIK7eh 5 Meter



Boom Barrier Ditec QIK7eh 5 Meter

Power supply - 230 V ~ 50/60 Hz

Absorption - 1 A

Line fuse - F1,6A

Torque - 70 Nm

Insulation class - Class 1

Opening time - 2 ÷ 6 s/90°

Closing time - 2 ÷ 6 s/90°

Bar length (max) - 6000 mm

Service class - 5 - VERY INTENSE

Intermittence - S2 = 60 min, S3 = 60%

Temperature - min -20°C max +55°C

Degree of protection - IP24D


Control panel - EL31R

### Specification

INTENSE (for apartment block, industrial and commercial entrances and car parks with vehicle access or access for intense pedestrian use.



Scan product



Ref: KT10200200DTQ80H

## Boom Barrier 8 meters with light and LEDs FAAC B680H



Boom Barrier 8 meters with light and LEDs FAAC B680H

Power supply 100 ÷ 240 ~ 50 (60) Hz

Electric Motor 36 Vdc Brushless

Absorbed power 240 W

Absorbed current 1,1 A/230 V

Motor rotation speed 1.000 ÷ 6.000 RPM

Pump capacity 3,2 l/min (max)

Electronic deceleration Absolute encoder

Operating ambient

temperature -15°C ÷ +65°C

Weight 85 kg (65 kg body +

20 kg housing)

Oil type FA...

### Specification

The housing is non load-bearing and may be easily replaced, with the upright post remaining in place.

It is available in stainless-steel or steel versions, with the innovative, ...



Scan product

Ref: KT10200200DTQIK4

## Boom Barrier Ditec QIK4e 4 Meter



Boom Barrier Ditec QIK4e 4 Meter

Power supply - 230 V ~ 50 Hz

Absorption - 1.5 A

Line fuse - F1,6A

Torque - 90 Nm

Insulation class - Class 1

Opening time - 4 s/90°

Closing time - 4 s/90°

Bar length (max) - 3700 mm

Service class - 4 - INTENSE

Intermittence - S2 = 15 min, S3 = 30%

Temperature - min -20°C max +55°C

Degree of protection - IP24D


### Specification

An omnipolar disconnection switch with minimum contact gaps of 3 mm must be included in the mains supply.

Check that upstream of the electrical installation there is an adequate re...



Scan product



Ref: KT10200200DTQIK7

## Boom Barrier Ditec QIK7eh 4 Meter



Boom Barrier Ditec QIK7eh 4 Meter

Power supply - 230 V ~ 50/60 Hz

Absorption - 1 A

Line fuse - F1,6A

Torque - 70 Nm

Insulation class - Class 1

Opening time - 2÷6 s/90°

Closing time - 2÷6 s/90°

Bar length (max) - 6000 mm

Service class - 5 - VERY INTENSE

Intermittence - S2 = 60 min, S3 = 60%

Temperature - min -20°C max +55°C

Degree of protection - IP24D

Control panel - EL31R

### Specification

An omnipolar disconnection switch with minimum contact gaps of 3 mm must be included in the mains supply.

Check that upstream of the electrical installation there is an adequate re...



Scan product

Ref: KT10200200KGV6

## Godrej Boom Barrier Without LED 6 Meter Length DC motor GVB6



Model No. GVB6

- Housing Thickness: 1.5 mm thickness for higher strength and reliability

- Inbuilt anti crash safety feature


- Better Visibility: White aluminum boom bar with reflective strips and Dark Gray powder coated housing

- IP54 Protection: Control unit is IP - protected making it dust and water resistant

- Optical Beam Sensor: Safety device to detect presence of vehicle...



Scan product



Ref: KT10200200NAPFX

## **Boom Barrier 7 Meter with led Neptune**

Make - Neptune  
Model Power Fusion XD  
Power supply 220 - 240V AC 50/60 Hz  
Electric motor 24V DC brushless  
Max. power- 200 watt  
Max. torque - 400 - 600 Nm  
Opening/closing speed -2.5 to 5 Sec  
Surface treatment Pre hot dip galvanized and dust painted  
Encoder -Integrated with motor  
Beam type -Elliptical with rubber gasket and plastics  
Protection class - IP 65  
use Frequency - 1...



Scan product


Ref: KT10200200PAT6D

## **Boom Barrier With DC Motor without led 4 to 6 Meter**

MODEL NO.-PAT 6D ( DC BRUSHLESS MOTOR)  
MECHANISM-ELECTRO-MECHANICAL  
POWER SUPPLY -220-230V AC, 50-60 HZ/110V AC 60 HZ  
Duty Cycle -100%  
Control Voltage -24 DC  
Power Consumption -120 W  
OPENING/CLOSING SPEED -4 - 6 SECS  
MAXIMUM BOOM LENGTH -UP TO 6 METERS TELESCOPIC  
BOOM  
HOUSING -GALVANISED MILD STEEL + RA POWDER COATED  
OR SS HOUSING (OPTIONAL)  
MTBF -10 MILLION OPERATIONS



Scan product



Ref: KT1020020K4BBS8

## K8 Crash Rated Bollards

Swaraj's K8 Crash Rated Bollards

Model: S8

Diameter: 275 with 3mm SS 304 Cover

Height: 1000mm

Mechanism: Hydraulic with 3sec EFO and 1 Cycle Accumulator  
(01 Set = 05 Bollards)



Scan product

Ref: KT1020020TSB300

## Technospacio Boom Barrier TSB300

Technospacio Boom Barrier TS-B-300

Brand Name: TECHNOSPACIO

Model: TS-B-300

Operating Speed: 1.5 s to 6 s

Boom Length: 3 m to 6 m

Boom Type: Telescopic Straight Boom

Motor Type: DC 24V Brushless Motor

Output Power: 150 W

Operating Voltage: DC 24V

Power Supply: AC 220V/110V, 50 Hz to 60 Hz

Remote Control Distance:  $\leq 30$  m

Operating Temperature:  $-30^{\circ}\text{C}$  to  $75^{\circ}\text{C}$


Protection Level: IP5...

### Specification

The Technospacio-Boom Barrier-300 Series is a high-reliability DC brushless boom barrier designed for continuous operation in demanding environments such as apartments, toll gates...



Scan product



Ref: KT1020020TSB500

## Technospacio Boom Barrier TSB500

Technospacio Boom Barrier TS-B-500

Brand Name: TECHNOSPACIO

Model: TS-B-500

Operating Speed: 0.5 s to 6 s

Boom Length: 3 m to 6 m

Boom Type: Telescopic Straight Boom

Motor Type: DC Servo Motor

Output Power: 200 W

Operating Voltage: DC 24V

Power Supply: AC 220V/110V, 50 Hz to 60 Hz

Remote Control Distance:  $\leq 100$  m

Operating Temperature:  $-30^{\circ}\text{C}$  to  $75^{\circ}\text{C}$

Protection Level: IP54

Dimen...



### Specification

The Technospacio-Boom Barrier-500 Series, Intelligent Barrier Gates are designed to provide outstanding durability and dependable long-term performance through precision production...



Scan product

Ref: KT102002GSBBEDC6

## Boom Barrier Without LED 4 to 6 Meter Length GSBBEDC6

Boom Barrier Without LED 4 to 6 Meter Length GS-BBEDC6

MECHANISM TYPE: ELECTRO-MECHANICAL

CONSTRUCTION: MS POWDER COATED

NOISE:

### Specification

CONSTRUCTION:


Heavy duty material used for internal assembly

High grade MS sheet for external housing with air ventilators

Key lock to provide secure access to electronics and conn...



Scan product



Ref: KT102003001S324

## **Retractable Gate 2.2 Meter Height SS 304**

Retractable Gate  
Material:- Stainless Steel 304  
Height:- 2.2 Meter  
Length:- As per requirement  
Thickness:- 0.5 mm



USP:  
Doesnt Need More space  
Stainless steel is best compared to MS  
Better Look  
Can be installed immediately on delivery



Scan product

Ref: KT102003002S242

## **Retractable Gate 1.2 Meter Height SS 202, 201**


Retractable Gate  
Material:- Stainless Steel 304  
Height:- 1.2 Meter  
Length:- As per requirement  
USP:



Doesnt Need More space  
Stainless steel is best compare to MS  
Better Look  
Can be installed immediately on delivery



Scan product



Ref: KT102003002S342

## **Retractable Gate 1.2 Meter Height SS 304**

Retractable Gate

Material:- Stainless Steel 304

Height:- 1.2 Meter

Length:- As per requirement

USP:

Doesnt Need More space

Stainless steel is best compare to MS

Better Look

Can be installed immediately on delivery



[Watch video](#)



[Scan product](#)

Ref: KT102004002MCRB

## **BGI K12 Crash Rated Road Blocker 4 Mtr**

BGI K12 Crash Rated Road Blocker - 4 Mtr

Model no.R2000

Company Certifications ISO 9001-2015

Mechanism Electro - Hydraulic

Blocking Height 600-900mm

Blocking Width 6 Mtr (Customized)

Safety Protection Photo Sensor & Loop Detector


Protection Class IP66 for Control Panel Enclosure

Housing Galvanised Mild Steel Body

Integration Integration with the Bollard & Other access control P...



[Scan product](#)



Ref: KT102006001000

## **Sliding Gate Motor Ditec NEOS Series 1000kg**

Sliding Gate Motor Ditec NEOS Series NEOS1000G 1000kg



Max. leaf weight - 1000kg

Stroke control - limit switch +  
virtual encoder

Maximum opening - 20 m

Duty class - 4 - heavy duty

Power supply - 230 Vac - 50/60 Hz  
120 Vac - 50/60 Hz (J version)

Motor power supply - 24 Vdc

Power input - 2 A  
4 A (J version)

Thrust- 1000 N



Scan product

Opening and closing speed - 0.1 - 0.19 m/s

Ref: KT102006002000

## **Sliding Gate Motor Ditec CROSS Series 2000kg**

Sliding Gate Motor Ditec CROSS Series CROSS20VEI 2000kg



Electromechanical actuator for sliding gates up to 2000 kg

Stroke control - magnetic limit switch

Capacity - 2000 kg

Service index - very intensive - up to 450,000 cycles

Intermittent operation S2=90 min - S3=90%

Cycles / hour \* 27

Consecutive cycles \* 44


Power absorption 230 Vac - 50/60 Hz

Power input 3.5 A

Thru...



Scan product



Ref: KT102006002400

## **Sliding Gate Motor Ditec ION Series 600kg**

Sliding Gate Motor Ditec ION Series ION6B 600kg



Max. leaf weight: 600 kg

Stroke control: Virtual encoder

Maximum opening width: 20 m

Service class: Intensive use, tested up to 150,000 cycles

Power supply: 100-120 Vac, 200-240 Vac (selectable by switch), 50-60 Hz

Power absorption: 24 Vdc

Thrust: 800 N pick-up current

Opening and closing speed: 0.1-0.3 m/s

Release system...



Scan product

Ref: KT102006002844R

## **Sliding gate Operator FAAC 844 R 380V MC 3 PH**



SLIDING GATE OPERATOR 844 R 380V-MC- 3PH

Maximum anti-crushing safety by coupling the twin-disk oil-bath clutch with the electronic device and encoder.

- Inductive limit switch.
- Designed for height and side adjustable fastening.

Power supply voltage -380-415V~ 3PH+N 50/60 Hz

Electric motor Asynchronous three-phase


Max. power 950 W

Max. torque 62 Nm (\*)

Max expressed force 25...



Scan product



Ref: KT102006003500

## **Sliding Gate Motor Ditec CROSS Series CROSS35VEI 3500kg**



Sliding Gate Motor Ditec CROSS Series CROSS35VEI 3500kg  
Electromechanical actuator - for sliding gates  
up to 3500 kg  
Stroke control - magnetic limit switch  
Capacity - 2000kg  
Service index- very intensive  
up to 450,000 cycles  
Intermittent operation- S1 = 100%  
continuous use  
Cycles / hour \*- 32  
Consecutive cycles \* - continuous  
Power absorption- 230 Vac - 50/60 Hz  
Power input - 4...

### **Specification**

steel worm screw; cemented, tempered and adjusted with a bronze crown

irreversible geared motor to avoid installation of electro-mechanical locks

Safety-Test function

sturdy le...



Scan product

Ref: KT10200600D400

## **Sliding Gate Motor Ditec ION Series 400kg**

Sliding Gate Motor Ditec ION Series ION4B 400kg



Max. leaf weight: 400 kg

Stroke control: Virtual encoder

Maximum opening width: 20 m

Service class: Intensive use, tested up to 150,000 cycles

Power supply: 100 Vac - 240 Vac, 50-60 Hz

Power absorption: 24 Vdc


Thrust: 600 N pick-up current

Opening and closing speed: 0.1 - 0.3 m/s

Release system for manual opening: Key ope...



Scan product



Ref: KT10200600D500

## Sliding Gate Motor Ditec NEOS Series 500kg

Sliding Gate Motor Ditec NEOS Series NEOS 500 G 500kg



Max. leaf weight - 500 kg

Stroke control - virtual encoder

Maximum opening - 20 m

Duty class 4 - heavy duty

Power supply - 230 Vac - 50/60 H

Motor power supply - 24 Vdc

Power input -1,5 A

Thrust - 500 N

Opening and closing speed 0.1 - 0.25 m/s

Release system for manual opening key operated




Scan product

Intermittent operation...

Ref: KT10200600N600

## Sliding Gate Motor Ditec NEOS Series 600kg

Sliding Gate Motor Ditec NEOS Series NEOS600 600kg

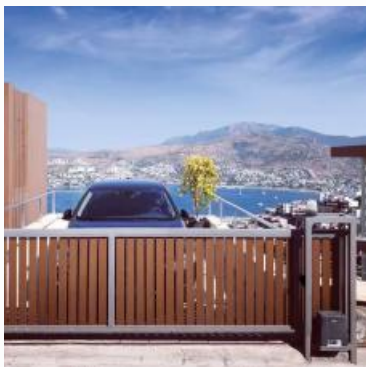

Max. leaf weight: 600 kg

Stroke control: Limit switch + virtual encoder

Maximum opening: 20 m

Duty class: 4 - heavy duty

Intermittent operation: S2 = 30 min; S3 = 50%

Power supply: 230 Vac - 50/60 Hz

Motor power supply: 24 Vdc

Power input: 1.5 A


Thrust: 600 N

Opening and closing speed: 0.1 - 0.24 m/s



Scan product

Protection ratin...



Ref: KT102006010AZ80

## **Swing gate Roller Motor AZSW108B800KG**

KIT INCLUDES Operator (800Kg)- 2 No'sControl unit  
AZSWDC228- 1 noBOLT-TRANSMITTER- 2nos (AZ-T23B)  
ECO - Swing gate Single Roller operator 800 Kg



Swing Roller gate operator is Designed to move gates  
Installed in Heavy Industrial and Commercial Buildings  
Easier to drive the gate motor is Mounted on the far end  
from hinged point  
Spring enhances the tolerance capacity against th...



Scan product

Ref: KT1020060AZ108A

## **Swing gate Motor AZSW108A/400KG 1 Operator Kit**


AZSW108A/400KG 1 OPERATOR KIT  
ECO-Swing gate Single Roller operator 400 Kgs  
Operator (400Kg)-1 NoControl unit AZSWDC227- 1  
noTRANSMITTER- 2 nos (AZ-T23B)



Power Supply 220 V - 240 V AC  
Motor Watt 40 W \* 2 no's  
Motor Power 24 V DC  
Push Force 600 N  
Motor RPM 52 RPM  
Speed 15 m / min  
Remote Distance  $\leq$  50 m  
Environment Temperature -  $-35^{\circ}\text{C} \sim + 65^{\circ}\text{C}$



Scan product



Ref: KT1020060TSS100

## Swing Barrier Gate TSS100 Technospacio

Brand Name: TECHNOSPACIO  
Technospacio Swing Barrier Gate TS-S-100  
Model Name: TS-S-100  
Dimensions: 260 × 180 × 1050 mm  
Cabinet Material: 304 Stainless Steel  
Material Thickness: Top cover 1.2 mm + Body 0.8 mm  
Passage Width: ≤ 1000 mm  
Passage Indicator: Soft LED indicator light on top + Door  
RGB 3-color welcome lamp  
IR Sensor: 2 Pair Sensor  
Operating Environment: Indoor/Outdoor (...)

### Specification

The Technospacio TS-S-100 Swing Gate is a stylish and intelligent entrance control solution designed for secure, fast, and smooth pedestrian access. Featuring elegant glass swing b...



Scan product

Ref: KT1020060TSS350

## Swing Barrier Gate Technospacio TSS350


Technospacio Swing Barrier Gate TS-S-350  
Brand Name: TECHNOSPACIO  
Model Name: TS-S-350  
Dimensions: 1200 × 160 × 980 mm  
Cabinet Material: 304 Stainless Steel  
Material Thickness: Top cover 1.2 mm + Body 0.8 mm  
Passage Width: 600-850 mm  
Passage Indicator: Soft LED indicator light on top + Door  
RGB 3-color welcome lamp  
IR Sensor: 4 Pair Sensor  
Operating Environment: Indoor/Outdoor ...

### Specification

The Technospacio Swing Barrier-350 gates are stylish waist-high security speed gates that operate on the swing open principle with glass (or plastic) panels acting as the barrier g...



Scan product



Ref: KT1020060TSS380

## Swing Barrier Gate Technospacio TSS380

Technospacio Swing Barrier Gate TS-S-380

Brand Name: TECHNOSPACIO

Model Name: TS-S-380

Dimensions: 1400 × 120 × 1000 mm

Cabinet Material: 304 Stainless Steel

Material Thickness: Top cover 1.2 mm + Body 1.5 mm

Passage Width: ≤ 1000 mm

Passage Indicator: Soft LED indicator light on top + Door

RGB 3-color welcome lamp

Operating Environment: Indoor/Outdoor (Covered)

Power Rate: 60 ...



### Specification

The Technospacio Swing Barrier-380 gates are stylish waist-high security speed gates that operate on the swing open principle with glass (or plastic) panels acting as the barrier g...



Scan product

Ref: KT102008004FESD

## Single Lane Flap barrier with ESD Access Control

Flap Barrier (Left & Right Single Core - 1 Nos)

1. Size: 1200\*300\*980mm

2. Lane width: 600mm

3. Power supply: 100-240V 50/60Hz

4. Full height mechanism with DC motor

5. Communication: RS485/RS232

6. Material : SUS304

7. Acrylic Flap with LED



Face Id

1. Processor: RK3568


2. Operating system: Android 11.0

3. Face display: 8 inches with capacitive touch

4. Tester: 3-color status l...



Scan product



Ref: KT10200800SBT33

## Swing Barrier Turnstile for Additional Lane SBT320



Model No.: SBT320

Swing Barrier Turnstile for Additional Lane

Reliability

- SUS304 stainless steel casework ensure long-lasting durability.

- High quality electrical components.

Barriers unlock automatically during power outage.

- All smooth finish. No exposed screws.

- Ergonomic design makes card and fingerprint authentication fast & simple for users

Power Requirements -AC110V/22...



Scan product

Ref: KT10200800SBTL2

## wide passage Single Lane Swing Barrier Turnstile SBT2000S



Model No.: SBT2000S

Reliability

- A design for both disabled and non-disabled users

- MCBF of 5-million times

- Smart indicator modes representing the standby, successful verification and access denied status

Safety

- Anti-collision


- Barrier unlock automatically during a power outage

- Fast and straightforward card and fingerprint authentication

Power Requirements AC 110V/220...



Scan product



Ref: KT102008SBTL500

## Single Lane Swing Barrier Turnstile SBTL500

Single Lane Swing Barrier Turnstile SBTL500

Model: SBTL500

Power Requirements: AC100 ~ 120V / 200 ~ 240V, 50/60Hz

Working Temperature: -20°C ~ 70°C

Working Humidity: 5% ~ 90% (non-condensing)

Working Environment: Indoor/Outdoor (if sheltered)

Max. Speed of Throughput: 30 people per minute

Lane Width (mm): 650

Dimension (L×W×H): 1360 × 280 × 980 (mm)

LED Indicator: Support

Cabin...



### Specification

SBTL300 series and associated access control readers are all factory-tested prior to shipping.

Provides true plug & play turnstiles with the lowest possible total cost of ownershi...



Scan product

Ref: KT102008SBTL520

## Single Lane Swing Barrier Turnstile SBTL520

Model: SBTL520

Power Requirements: AC100 ~ 120V / 200 ~ 240V, 50/60Hz

Working Temperature: -20°C ~ 70°C

Working Humidity: 5% ~ 90% (non-condensing)

Working Environment: Indoor/Outdoor (if sheltered)

Max. Speed of Throughput: 30 people per minute

Lane Width (mm): 650

Dimension (L×W×H): 1360 × 280 × 980 (mm)

LED Indicator: Support

Cabinet Material: SUS304 Stainless Steel

Lid Mate...




### Specification

The SBTL520 Series is a single-lane swing barrier turnstile designed for smooth, silent operation and low power consumption. Built from stainless steel, it ensures high durability ...



Scan product



Ref: KT102008SBTL700

## Single Lane Swing Barrier Turnstile SBTL700

Single Lane Swing Barrier Turnstile SBTL700

Input Voltage: AC100V to 120V / 200V to 240V, 50 Hz to 60Hz

Working Temperature: -10°C to 70°C

Working Humidity: 5% to 90% (Non-condensing)

Working Environment: Indoor

IR Sensor: 6 pairs


Max. Speed of Throughput: 30 people per minute

Lane Width (mm): 650

Dimension (L×W×H): 1200 × 150 × 980 (mm)

LED Indicator: Support

Cabinet Material:...

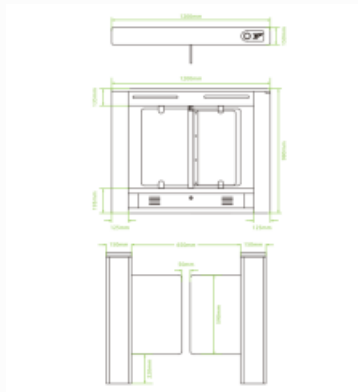

### Specification

The single-lane swing barrier turnstile designed for smooth, silent operation and low power consumption. Built from stainless steel, it ensures high durability and long-lasting per...



Scan product

Ref: KT102008TSSG250

## Technospacio Speed Barrier Gate TSSG250

Technospacio Speed Barrier Gate TS-SG-250

Brand Name: TECHNOSPACIO

Model Name: TS-SG-250

Dimensions: 600 × 130 × 980 mm

Material Thickness: SUS304 / SUS316 (Optional), T = 1.5 mm

Passage Width: 600-900 mm

Passage Indicator: Soft LED indicator light on top + Door

RGB 3-color welcome lamp

Operating Environment: Indoor/Outdoor (Covered)

Power Rate: 60 W

Power Supply: AC 110-220 V,...




### Specification

The TS-SG-250 Speed Gate is a premium, waist-high pedestrian access control solution designed for secure, fast, and efficient entry management. Featuring high-speed glass barrier p...



Scan product



Ref: KT102008TSSG400

## Technospacio Speed Barrier Gate TSSG400

Technospacio Speed Barrier Gate TS-SG-400

Brand Name: TECHNOSPACIO

Model Name: TS-SG-400

Dimensions: 1400 × 120 × 980 mm

Material Thickness: SUS 304 + Side Glass Panel + Acrylic Lid

Passage Width: 600-900 mm

Passage Indicator: Soft LED indicator light on top + Door

RGB 3-color welcome lamp

Operating Environment: Indoor/Outdoor (Covered)

Power Rate: 60 W

Power Supply: AC 110-220...



### Specification

The TS-SG-400 Speed Gate is a premium, waist-high pedestrian access control solution designed for secure, fast, and efficient entry management. Featuring high-speed glass barrier p...



Scan product

Ref: KT102008TTSF300

## Technospacio Flap Barrier Turnstile TSF300

Technospacio Flap Barrier Turnstile TS -F-300

Brand Name: TECHNOSPACIO

Model Name: TS-F-300

Dimensions: 1200 × 160 × 980 mm

Cabinet Material: 304 Stainless Steel

Material Thickness: Top cover 1.2 mm + Body 0.8 mm

Passage Width: 600 mm

Passage Indicator: Soft LED indicator light on top + Door

RGB 3-color welcome lamp

Operating Environment: Indoor/Outdoor (Covered)

Power Rate: 40...




### Specification

The Technospacio Flap Turnstile-300 series are robust products functioning to provide pedestrian access control in areas requiring moderate level of security. With its compact case...



Scan product



Ref: KTIO200MARSS100

## Single Lane Swing Barrier Turnstile MarsS100

Single Lane Swing Barrier Turnstile Mars-S100  
TECHNICAL SPECIFICATIONS



Model: Mars-S100

Visual Indicator: Steady Green = Normal Use, Steady Red = Door Closed

Audio Indicator: Internal Buzzer

Lane Type: Single Lane

Lane Width: 660 mm (Optional: 900 mm)

Barrier Movement Type: Swing

Motor: DC Brushless Motor

Movement Speed: 0.8 s per Movement (Open/Close Timing)

Movement Accuracy:  $\pm 2$  D...

### Specification

Additionally, this compact speed gate can integrate with access control system. Upon a valid verification of user's credentials (Fingerprint / Face / Palm / RFID Card / QR code), t...



Scan product

Ref: KTIO201703BT926

## Bridge Type Tripod Turnstile MTTT926A Magtech



Model No. MTTT-926A

Type - Bridge type

Construction of Material SS3 I 6 Grade

Control Motorized

Dimension - 1200 L X 280 W X 980 H

Power supply - 220V AC 50 HZ

Movement - Automatic

Passage width - 550 MM

Power consumption - 32 W

Duty cycle - 100%

Enclosure rating - IP 65 (NABL Certified)

Unlock time - 0.2S


Traffic Speed -

### Specification

MAGTECH® Tripod Turnstile is aesthetically crafted in Stainless Steel, Grade 316 along with SS arms. The tripods turnstiles are categorized as Motorized and Non-Motorized comes as ...



Scan product



Ref: KT10201703TMC10

## Tripod Turnstile MC 1100

TURNSTILE TYPE TRIPOD WITH DROP ARM FEATURE  
FROM MCVIK ISO CERTIFIED  
FULLY STAINLESS STEEL STRUCTURE WITH CONTROL BOX,  
220V POWER SUPPLY. MOUNTING BRACKETS,  
BI-DIRECTIONAL ACCESS CONTROL COMPATIBILITY  
WEATHERPROOF BOLT-TOGETHER CONSTRUCTION  
FOR EASY ACCESS ALONG CONFINED ROUTES.  
POWDER COATED FINISH IN A WIDE RANGE OF COLOURS  
SHOCK ABSORBING COUPLING BETWEEN MECHANISMS  
AND ROTA...



Scan product

Ref: KT1020GSFB304SS

## Flap Barrier GSFB304SS

Flap Barrier GS-FB304SS  
Product name: Flap Barrier  
Passage width:


### Specification

Product Feature:

- The flap barrier is made of high-quality 304-grade stainless steel and High-Density Acrylic.
- One IQ box KNX per window connects up to four window drives and two ...



Scan product



Ref: KT1020GSP304SS

## P type Gate GSP304SS

P type Gate GS-P304SS

Product name: P-Type Gate

Passage width:



P- TYPE GATE

### Specification

The barrier has a combination of a DC Motor with electronic proximity limit switches which ensures smooth operation. The leaf fail-safe feature ensures gate is automatically free in ...



Scan product

Ref: KT1020GSSB304SS

## Swing Barrier GSSB304SS

Swing Barrier GS-SB304SS

Product name: Swing Barrier

Passage width:




SWING BARRIER

### Specification

The Swing gate model is a compact security barrier that seamlessly integrates with access control systems. The swing barrier is equipped with multiple sensors and buzzers for safety...



Scan product



Ref: KT1020GSTM304SS

## **Slim Line Tripod Turnstile GSTM304SS**

Slim Line Tripod Turnstile GS-TM304SS

Product name: Slim Line Tripod Turnstile

Passage width:



### **Specification**

AREAS OF APPLICATION:

- Commercial and IT Parks
- Educational Buildings and Administrative Buildings.
- Amusement Parks and Stadiums



Scan product

Ref: KT1020GUSB304SS

## **Ultra Slim Barrier GSUSB304SS**

Ultra Slim Barrier GS-USB304SS

Product name: Ultra Slim Barrier

Passage width:



### **Specification**


In-built Led Indication for clear understanding(RED/GREEN/YELLOW)

Key lock to provide secure access to electronics and connections

IR sensors and proximity electronic switches for...



Scan product



Ref: KT1020GUSBTST200

## Technospacio Tripod Turnstile TST200



Brand Name: TECHNOSPACIO

Model Name: TS-T-200

Dimensions: 480 × 280 × 980 mm

Cabinet Material: 304 Stainless Steel

Material Thickness: Top cover 1.2 mm + Body 1.5 mm

Passage Width: 550 mm

Passage Indicator: Soft LED indicator light on top + Door

RGB 3-color welcome lamp

Operating Environment: Indoor/Outdoor (Covered)

Power Rate: 40 W

Power Supply: AC 110–220 V, 50/60 Hz

IP Rati...

### Specification

Designed for secure pedestrian access control in offices, factories, commercial buildings, schools, metro stations, airports, and other high-security entry points.

Ideal for managi...



Scan product

Ref: KT1020GUSBTST250

## Technospacio Tripod Turnstile TST250



Technospacio Tripod Turnstile TS-T-250

Brand Name: TECHNOSPACIO

Model Name: TS-T-250

Dimensions: 1200 × 160 × 980 mm

Cabinet Material: 304 Stainless Steel

Material Thickness: Top cover 1.2 mm + Body 1.5 mm

Passage Width: 550 mm

Passage Indicator: Soft LED indicator light on top + Door

RGB 3-color welcome lamp

Operating Environment: Indoor/Outdoor (Covered)

Power Rate: 40 W

Powe...


### Specification

Designed for secure pedestrian access control in offices, factories, commercial buildings, schools, metro stations, airports, and other high-security entry points.

Ideal for managi...



Scan product



Ref: KTIO20GUSBTST350

## Technospacio Tripod Turnstile TST350

Technospacio Tripod Turnstile TST350

Brand Name: TECHNOSPACIO

Model Name: TS-T-350

Dimensions: 1200 × 280 × 980 mm

Cabinet Material: 304 Stainless Steel

Material Thickness: Top cover 1.2 mm + Body 1.5 mm

Passage Width: 550 mm


Passage Indicator: Soft LED indicator light on top + Door

RGB 3-color welcome lamp

Operating Environment: Indoor/Outdoor (Covered)

Power Rate: 60 W

Power ...

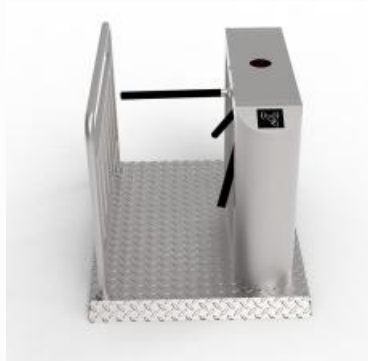

### Specification

Designed for secure pedestrian access control in offices, factories, commercial buildings, schools, metro stations, airports, and other high-security entry points.

Ideal for managi...



Scan product

Ref: KTIO4007001SLCS

## Safety Curtain Sensor

Single Output Safety Light curtain

Model : LC 1290-410 -1OP-CW-OA

For outdoor application

Output :PNP NC

Supply : 24V DC

No. of Beams : 12

Pitch : 90mm

Protected height : 990 mm

Overall Height : 1125 mm

Range : 10 Mtr.




Each Set Consists:-

1. Transmitter - 1 No.
2. Receiver - 1 No.
3. Cable - 2 Nos.
4. Controller (1OP-CW) - 1 No



Scan product



Ref: KT190006001P1FP

## Flame Proof Push Button

Flame Proof Push Button Set With One Switches (Green).

\* Color Combination Can Be Changed on Request.

\* NO/NC Combination Can Be Changed on Request.

\* Push Button Size and Appearance Subject to Change Without Prior Notice.

Warranty:- Not Applicable



Scan product