





Product Catalogue

Boom Barrier

Automation > Automatic Entry Solutions > Boom Barrier

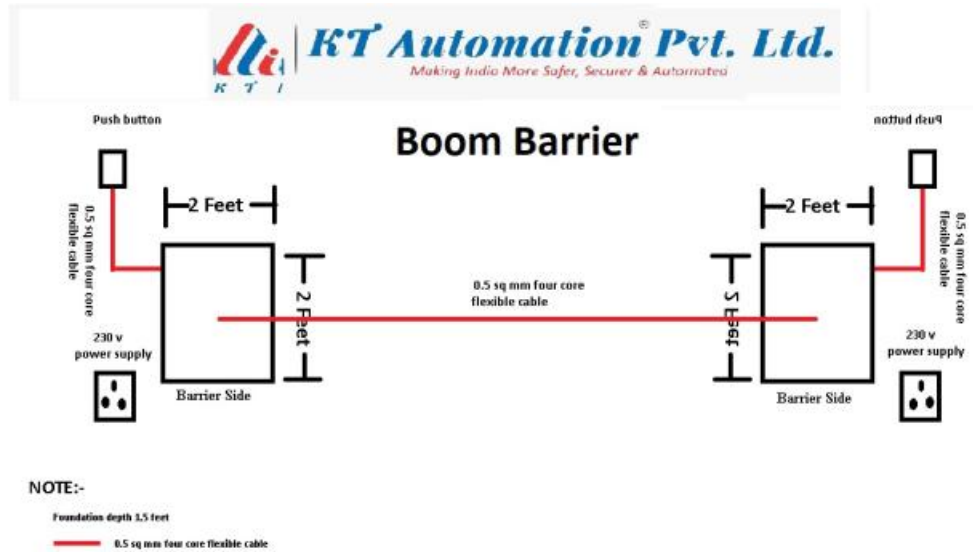

KT Automation Private Limited · D 32-33 Kamalanjali Commercial Complex,
Radhakrishna Crossing, Akota · 390020 Vadodara



Ref: KT104007001PHSW

Safety Photosensor

Safety Photosensor For Multiple Uses.
With NO,NC Facility
Power : 12V DC.



Scan product


Ref: KT190006001PB3S

Push Button 3 Switch Set Green, Blue, Red Normally Open

Push Button Set With Three Switches (Green + Yellow + Red)
used for Manual Operation as and when required
* Color Combination Can Be Changed on Request.
* NO/NC Combination Can Be Changed on Request.
* Push Button Size and Appearance Subject to Change
Without Prior Notice.
Warranty:- Not Applicable



Scan product



Ref: KT102002001BOO6

Boom for Boom Barrier 6 Meter

Boom for Boom Barrier
Size: 6 Meter



Scan product

Ref: KT102002001LPDT

Loop Detector


Loop Detector used In Exit for Automatic Exit
1.5 sq mm Cable to Be Used to for Automatic Gate Open in
Exit or Entry
Loop Created Under the Ground



Operating voltage- 220V AC $\pm 10\%$
Power Consumption:- $\leq 5VA$
Output Relays:- 240V/5A AC
Frequency Range:- 20 kHz to 170 kHz
Reaction Time:- 10ms
Loop Connection Wiring:- Maximum Length 20 Meters
Twisted at Least 20 Times Per Meter
Ope...



Scan product



Ref: KTI02002001KTIL

Boom Barrier With LED Up to 5 Meter

Model : BGL-100 (ESSL)

Boom Barrier: with Company Fitted LED up to 5 meter

Length:- Up to 5 Meter With LED



Dimension : 268 X 348 X 1050 in MM

Maximum Length of Boom : 5 meter

Boom Rest Stand : yes

LED Indicator Red/Green

Arm Material : Aluminium

Time for Up/Down : 6 s

Input Control Signal : Dry Contact

Ingress Protection Degree : IP54

Mode : Automatic/Manual

Bumping Bo...



Scan product



Watch video

Ref: KTI02002001KTI6

Boom Barrier Without LED 4 to 6 Meter Length KTI

Boom Barrier

Make:- KTI -Zkteco

Model -CMP 200

Length:- Up to 6 Meter

Without LED Model

MANUAL OVERDRIVE, ORIGINAL ALUMINUM

BOOM WITH BOTTOM PVC

TECHNICAL SPECIFICATIONS AS BELOW:

Power supply:220Va.c.±10% 50Hz (*)

Minimum opening time:5.5 s

Boom (aluminum) length:6m max.


Manual manoeuvre:



Scan product



Watch video



Ref: KT102002001RTSW

Remote for Boom Barrier

Remote For Boom Barrier
Can Operate From Approx 5-7 Meter Distance



Scan product


Ref: KT190006001PB2S

Push Button 2 Switch Set Green, Red

- * Push Button Set With Two Switches (Green + Red)
 - * Color Combination Can Be Changed on Request.
 - * NO/NC Combination Can Be Changed on Request.
 - * Push Button Size and Appearance Subject to Change Without Prior Notice.
- Warranty:- Not Applicable



Scan product



Ref: KT102002001RSPL

Resting Pole For Boom Barrier

Resting Pole For Boom Barrier



Scan product

Ref: KT190006001CNTR


Controller For Boom Barrier

Controller For Boom Barrier

(Image for representative purposes only, controller subject to change, based on boom barrier make and model).



Scan product



Ref: KT102002001BOO5

Boom with Led for Boom Barrier 5 Meter

Boom with Led for Boom Barrier

Size: 5 Meter

Warranty : NA



Watch video



Scan product

Ref: KT102002001SW46

Boom Barrier Without LED 4 to 6 Meter Length

Boom Barrier

Length:- Up to 6 Meter

Without LED Model

Model : PAT6

Make : Swaraj

Dimenssion : 350mm×275mm×1110mm

Maximum Length of Boom : 6 Meter

Boom Rest Stand : yes

Arm Material : MILD STEEL

Time for Up/Down : 3 TO 4 SECONDS

Input Control Signal : Dry Contact

Ingress Protection Degree : COMPLIANT TO IP68 STANDARDS


Optional Accessories WARNING/ TRAFFIC LIGHTS, PHOTOCCELL EYE FO...



Watch video



Scan product



Ref: KT102002001LMSW

Limit Switch For Boom Barrier

Limit Switch For Boom Barrier.

Warranty:- Not Applicable



Scan product

Ref: KT10200200DBGM400

Boom Barrier Without LED 4 to 6 Meter Length DC motor BGM 400

Boom Barrier

Make:-Zketeco

Model No.: BGM 400

- The fastest operating speed is 1.5s, the speed can be adjusted according to different boom arm length.

- Digital control monitoring, support delay automatic close functions.


- High safety, support power off manually rise boom arm, anti - smash functions.

Model BG300


Operating Speed 1.5-6s

Boom Length Max 4.5m

Boom Type Telescopi...

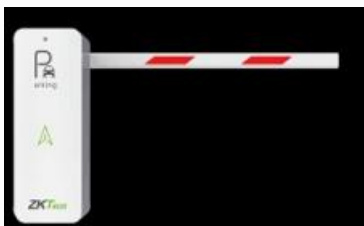

Scan product



Ref: KT10200200KT600L

KTi Boom Barrier Glass Finish 4 to 6 Meter Length DC motor

Automatic boom barriers are used to control vehicular movement on places where access control is required to ensure that only authorized personnel can access the premises.

An aluminium Bar rises in a vertical arc to allow the movement of vehicles.

BLDC motor is more powerful and requires almost no maintenance. All the operation process is soft without any noise and shaking
Boom...



Scan product

Ref: KT102002006NEPT

K4 Rated Crash Rated Boom Barrier Neptune

Model No.- NCRB K4-6.

Boom Length Upto 6 Mtr. Maxmium..

Make - Neptune.

CRASH RATED BOOM BARRIER.

COLOR: GRAY.

(Price Inclusive Push Button).



Features

Reliable Hydraulic Power Drive Unit

Certified as per ASTM 2626-18 MP30- P1 equivalent to K4

Crash Certification Standards to stop 6.8 Ton


vehicle traveling at 50 km/h (30 MPH)

100% Duty Cycle

Wide Range of Accessories and Safety...



Scan product



Ref: KT104007001PHSP

Safety Photosensor Premium

Safety Photosensor For Multiple Uses.

Range : 18 to 22 Mtr

With NO,NC Facility

Power : 12V DC.



Scan product

Ref: KT102002001AVIA8

Boom Barrier 8 Meter Length

Boom Barrier -8 meter

Make: Autozone

Power Supply -220V

Boom Length-6 Sec Upto 8 m

Remote distance-30 M

Max Recording of transmitter -60


Operation cycle-6 Million

Housing dimension-296*367*981

Protection class- IP54



Scan product



Ref: KT190006001PB1S

Push Button Single

- * Push Button Set With One Switches (Green Or Red)
- * NO/NC Combination Can Be Changed on Request.
- * Push Button Size and Appearance Subject to Change Without Prior Notice.



Scan product


Ref: KT10200200FRSPL

Floating Resting Pole For Boom Barrier

Floating Resting Pole For Boom Barrier



Scan product



Ref: KT102002003KTIL

Boom Barrier With LED Up to 3 Meter KTIL3



Boom Barrier: with LED
Model No.:BGL-100
Length:- Up to 3 Meter With LED
Make : ESSL
Dimension : 268 X 348 X 1050 in MM
Maximum Length of Boom : 3 meter
Boom Rest Stand : yes
LED Indicator Red/Green
Arm Material : Aluminium
Time for Up/Down : 2 s
Input Control Signal : Dry Contact
Ingress Protection Degree : IP54
Optional Accessories : 1. Photo Cell,
2. Air Switch,
3. L...



Scan product

Ref: KT1020020CG4000

Boom Barrier Came 4 Meter




Boom Barrier:- CAME
Model No. G4000
Length:-4 Meter
Includes:-
1 Controller
1 Remote
1 Push Button
1 Foundation Frame

Warranty:- 1 Year No on-site



Scan product



Ref: KT102002001AUZ6

Boom Barrier 6 Meter with Skirting

STAR-FENCE BLDC BOOM BARRIER
 Model no. AZBB115/AZBF036M
 BLDC BARRIER - AZBB115
 FENCH BOOM 6MTR - AZBF036M
 TRANSMITTER - AZBLDCTX22 - 2 NOS



Scan product


Ref: KT102002001B15M

Boom Barrier 2 Meter, 1.5 Meter

Parking Space Barrier LB330 L/R Series Manage parking space with ease Elegant and Efficient
 Elegant design with a solid chassis
 Operation speed asfast as 3s
 Embedded LED lighting
 DC 24V brushless motor
 Adjustable boom arm angle of rise and fall
 Model LB330 L/R
 Operating Speed 3s to 5s (congurable)
 Boom Arm Length 2m/1.5m
 Boom Arm Type Round boom with LED light
 Chassis Dimensio...



Scan product



Ref: KT102002001ESS6

Boom Barrier Without LED 4 to 6 Meter Length ESSL



Boom Barrier
Make:- ESSL
Model no.: BG100
Dimension : 268 X 348 X 1050 mm
Length:- Up to 6 Meter
Boom Rest Stand : yes
Arm Material : Aluminium
Time for Up/Down :(6M 6sec)
Input Control Signal : Dry Contact
Ingress Protection Degree : IP54

Output interface for Lamp (Optional)
Mode : Automatic/Manual
Bumping Bounce Back : yes
Auto closing time 1 - 80s
SMPS - Input AC 220V ...



Scan product


Ref: KT102002001RELY

Relay

Relay for Multiple use.



Scan product



Ref: KT102002001PAT5

Boom Barrier With LED Up to 5 Meter Swaraj Secutech



Boom Barrier:- Swaraj Secutech
 Length:- Up to 5 Meter With LED
 Model : PAT 5
 Make : Swaraj
 Dimension : 350MM×250MM×1070MM
 Maximum Length of Boom :5 meter
 Boom Rest Stand : yes
 Arm Material : ALUMINIUM WITH MS/SS BASE FRAME +
 EPOXY POWDER COATING
 TO PREVENT ANY CORROSION
 Time for Up/Down :4S (FOR 3-4 M), 6 S (FOR 6M)
 Input Control Signal : Dry Contact
 Ingress Protection De...



Scan product

Ref: KT102002001CAM6


Boom Barrier 6 Meter Make Came



Boom Barrier:- CAME
 Guard G6000
 Length:-6 Meter
 Includes:-
 1 Controller
 1 Remote
 1 Push Button
 1 Boom Rest
 1 Foundation Frame
 Warranty:- 1 Year on-site



Scan product



Ref: KT104007001PHWW

Wireless Safety Photosensor

Wireless Safety Photosensor For Multiple Uses.
With NO,NC Facility
Power : 12V DC.



Scan product

Ref: KT10200200DTQK7H

Boom Barrier Ditec QIK7EH 6 Meter

Ditec Set- Qik7EH - Barrier upto 5.8 M Long Boom


Includes :

1. Barrier Operator : Qik 7EH
2. Boom Arm : 5.8 M (Without LED)
3. Control Panel : 1 Nos.


Power supply - 230 V~ 50/60 Hz

Absorption - 1 A

Torque - 70 Nm

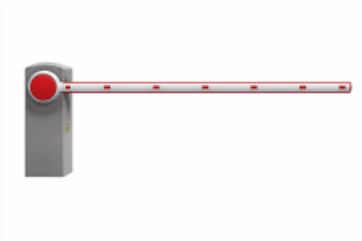

Scan product



Ref: KT102002001ESS8

Boom Barrier 8 Meter Length ESSL



Model: BG-108
 Make : ESSL
 Dimension : 268X 348 x 1050 MM
 Maximum Length of Boom - 8 meter
 Boom Rest Stand : yes
 Arm Material : Aluminium
 Time for Up/Down : 2s(for 1- 3 mm),6s(for 4-6 M)
 Input control : Dry Contact
 Ingress Protection Degree: IP54
 Output Interface : Access Control panel
 Mode: automatic /manual
 Bumping bounce back -Yes
 auto closing time : 1-80s
 SMPS - I...



Scan product

Ref: KT102002001B614

Boom Barrier Without LED 6 Meter Length




Model B614
 Make : FAAC
 Maximum Anti-crushing safety and motor with integrated encoder
 • Speed adjustment and smooth operation.
 • Integrated control unit in the upper part of the beam body, i.e easy maintenance and intuitive programming

Power supply voltage 220-240V ~ 50/60 Hz
 Electric motor With brushes 24V
 Max. power 165 W
 Max. torque 300 Nm
 Material type Steel
 Type of treatm...



Scan product



Ref: KT102002001BG1F

Boom Barrier with Fencing Arm BG100 ESSL

Boom Gate with Fencing Arm - BG100

Maximum length of Boom arm : 5m

Boom Rest Stand :Yes

Arm material : Aluminium

Time for Up/down : 6s

Input control signal : Dry contact

Ingress protection Degree : IP67

Remote control : Yes, upto 25 meters


Mode : Automatic/Manual

Incorporated control panel with 3

push buttons (STOP/UP/Down) to control the motor

Bumping bounce back : Yes

Auto cl...



Watch video



Scan product

Ref: KT102002001CGT8

Boom Barrier 8 Meter with LED Make Came

Boom Barrier:- cAME

Length:-8 Meter

Model No.:GARD GT8

PASSAGE WIDTHCLEARANCE -from 4 to 7.8 meters

MCBF 3 million cycles

Tested for intensive use up to 160 CYCLES/hour.

Protection rating (IP) 54

Power supply (V - 50/60 Hz) 230 AC

Motor power supply (V) 24 DC

Max current draw (mA) 1.1

Stand-by consumption (W) 7

Power (W) 240

Torque (Nm) 600

Opening time at 90° (s) 4 to 8


Cyc...



Watch video



Scan product



Ref: KT102002001AACP

Boom Barrier Access pro 3.5 Meter Magnetic

Barrier width of up to 3.5 m
Opening and closing times of minimum 1.3 s
Modular expandable control system
Limited approval for use with movement of persons



Technical data Access Pro
Barrier width Max. 3,5 m
Opening/closing time 1,3 s
Power consumption Max. 95 W
Drive technology MHTM™
Voltage 85-264 VAC, 50/60 Hz
Duty cycle 100%
Housing dimensions (L x W x H) 315 x 360 x 915 mm...



Scan product


Ref: KT102002001BB3M

Boom Barrier 3 Meter Model No MC 3001B

AUTOMATIC BOOM BARRIER -3 Meter
High Speed
MAKE MCVIK FOR TOLL AND PARKING
MODEL: MC-3001B, COMPLETE WITH
CONTROLLER, MOUNTING PLATE, PUSH BUTTON FOR
OPERATION,
Power supply:-220Va.c.±10% 50Hz (*)
Minimum opening time: - 0.9s
Boom (aluminum) length:-3m max.
Manual manoeuvre: -Quick key release
Maximum no. manoeuvres in 24h... 100%
Working temperature: --20°C to +70 C
Warranty...



Scan product



Ref: KT102002001BOFF

Boom Barrier with Folding Arm

Model : BG100

Maximum length of Boom : 5m
(2.5 m +2.5m / 3m+2m / 2m+3m)

Boom Rest Stand :Yes

Arm material : Aluminium

Time for Up/down : 6s

Input control signal : Dry contact

Ingress protection Degree : IP67

Input Interface for : 1. Photocell

2. Air switch

3. Loop detect

Output interface for 1. lamp

Optional Interface : Access control panel, Stand alone
access control,Control b...



Watch video



Scan product

Ref: KT102002001BOO8


Boom for Boom Barrier 8 Meter

Boom for Boom Barrier

Size: 8 Meter



Scan product



Ref: KT102002001CAM4

Boom Barrier 4 Meter Make Came

Boom Barrier:- CAME

Model No.: Guard4

Length:-4 Meter

Includes:-

1 Controller

1 Remote

1 Push Button

1 Foundation Frame



Watch video



Scan product

Ref: KT102002001FAAC

Boom Barrier 4 Meter Make FAAC

Model No - FAAC 620 standard with Boom Length 4 Mtrs.


Opening/ Closing Time - 3.5 - 4.5 Sec

Make - FAAC

Warranty:- 1 Year No on-site



Scan product



Ref: KT102002001LDIT

Loop Detector - Industrial Grade

Loop Detector Industrial Grade used In Exit for Automatic Exit

Dual Channel Metal Detector Vehicle Loop Detector for Parking Lot Access Control

1.5 sq mm Cable to Be Used to for Automatic Gate Open in Exit or Entry

Loop Created Under the Ground



Model No.: 220S

Specifications:

- Supply voltage: AC220V
- Loop quantity: 2
- Output interface: four relay
- Sensitivity: 10 class adjust...

Specification

Specifications:

- Supply voltage: AC220V
- Loop quantity: 2
- Output interface: four relay
- Sensitivity: 10 class adjustable
- Output Delay: no
- Sensitivity: adjustable in 3 increments...



Scan product

Ref: KT102002001PT5A

Boom Barrier Anti pet Up to 5 meter

Anti Pet Boom Barrier

Make:- Swaraj OR Equivalent

Length:- Up to 5 Meter

Model : PAT5A

Make : Swaraj

Dimenssion :350X250X1070 mm

Maximum Length of Boom : 5 Meters

Boom Rest Stand : NO


Arm Material : Mild Steel with Zinc coating

Time for Up/Down : 3 to 4 Seconds


Input Control Signal : Dry Contact

Ingress Protection Degree: IP55

Optional AccessoriesWARNING/ TRAFFIC LIGHTS, ...



Scan product



Ref: KT102002001RTBB

Remote for Boom Barrier Came

Remote For Boom Barrier- Came
Can Operate From Approx 5-7 Meter Distance



Scan product

Ref: KT102002001SPRG

Balancing Spring For Boom Barrier


Boom Barrier Spring for specific models. Use only after technical approval. Installation by certified technician only.



×



Scan product



Ref: KT102002001TOLP

Boom Barrier 3 Meter Magnetic

Boom Barrier - 3 Meter

Make : Magnetic

Model No.: Toll Pro

Motorised Boom Barrier with# 03 meter boom # wireless remote# IP54 rated (min)# MCBF: 10 Million cycles.

Opening and closing times down to 0.3 s

Very low operating costs thanks to efficient and long-lived MHTM™ drive

Highly user-friendly and with optimum accessibility
Designed for 10 million opening and closing cycles...



Watch video



Scan product

Ref: KT102002002CMP1

Boom Barrier Economical Model up to 6 Meter

Boom Barrier

Length:- Up to 6 Meter

Make:- Zkteco OR Equivalent

Input Power:- AC 220/AC 110

Rated Power:- 90 W

Operating Temperature:- -30 Degree C to +80 Degree C

Chassis Weight:- 55

Protection Level:- IP44

Remote Control Distance:- Up to 30 Meter

Opening / Closing Time:- 6 Sec


Warranty:- 1 Year No on-site



Watch video



Scan product



Ref: KT102002006AACP

Boom Barrier 6 Meter Magnetic Access Pro L

Make : Magnetic
Access Pro-L
Length -6 Meter
Opening/closing time -4.0 s
Power Consumption -Max. 25 W
Drive technology -MHTM™
Voltage -85-264 VAC, 50/60 Hz
Duty cycle- 100%
Housing dimensions (W x D x H)-315 x 360 x 915 mm
Enclosure rating-IP 54
High level of functionality for numerous applications
Very low operating costs thanks to efficient and long-lived MHTM™ drive
Ease-...



Scan product


Ref: KT102002006NEP6

Boom Barrier 8 Meter PowerFusion XD Neptune

AUTOMATIC BARRIER MODEL - PowerFusion XD Supply,
installation, testing and commissioning of Boom Barrier:
Application Environment Condition Indoor / Outdoor Drive
Motor: Electro-Mechanical DC Brushless Protection Degree:
IP 65
Power Supply: 230V AC
CE Certified
High torque bi-direction 24VDC BLDC motor for heavy and
continuous Traffic
Modern design with removable top cover.
V...



Scan product



Ref: KT10200200DEQ80H

Boom Barrier 8 meters without light and LEDs FAAC B680H



Boom Barrier 8 meters without light and LEDs FAAC B680H
 Power supply 100 ÷ 240 ~ 50 (60) Hz
 Electric Motor 36 Vdc Brushless
 Absorbed power 240 W
 Absorbed current 1,1 A/230 V
 Motor rotation speed 1.000 ÷ 6.000 RPM
 Pump capacity 3,2 l/min (max)
 Electronic deceleration Absolute encoder
 Operating ambient temperature-15°C ÷ +65°C
 Weight 85 kg (65 kg body + 20 kg housing)
 Oil type...

Specification


The B680H has an Hybrid heart which, together with its "everlasting" springs, allows it to exceed 2,000,000 cycles of continuous-use, raising 8 m beams in less than 6 seconds, in t...



Scan product

Ref: KT10200200DESS6

Boom Barrier Without LED 4 to 6 Meter Length DC motor BG 100



Boom Barrier

Make:- ESSL

Model no.: BG100-BDC

36 DC BRUSHLESS BARRIER

Features:

Power Supply : 220V+10% 50/60Hz,

110V+10% 50/60Hz ,

Motor Power : 36VDC 120W,

Max Length of Boom : 6M .

Power Supply : 220V+10% 50/60Hz

110V+10% 50/60Hz

Motor Power : 36VDC 120W

Max Length of Boom : 6M

Time For Up/ Down : 1.5S(for 1-3M) 3S(for 3-4M)/6S(for 5-6M)

Working Environmental : -350 ~+500C


...



Scan product



Watch video



Ref: KT10200200DTQ7EH

Boom Barrier Ditec QIK7eh 5 Meter

Boom Barrier Ditec QIK7eh 5 Meter

Power supply - 230 V ~ 50/60 Hz

Absorption - 1 A

Line fuse - F1,6A

Torque - 70 Nm

Insulation class - Class 1

Opening time - $2 \div 6$ s/90°

Closing time - $2 \div 6$ s/90°

Bar length (max) - 6000 mm

Service class - 5 - VERY INTENSE

Intermittence - S2 = 60 min, S3 = 60%

Temperature - min -20°C max +55°C

Degree of protection - IP24D

Control panel - EL31R

Specification

INTENSE (for apartment block, industrial and commercial entrances and car parks with vehicle access or access for intense pedestrian use.



Scan product



Ref: KT10200200DTQ80H

Boom Barrier 8 meters with light and LEDs FAAC B680H

Boom Barrier 8 meters with light and LEDs FAAC B680H

Power supply 100 ÷ 240 ~ 50 (60) Hz

Electric Motor 36 Vdc Brushless

Absorbed power 240 W

Absorbed current 1,1 A/230 V

Motor rotation speed 1.000 ÷ 6.000 RPM

Pump capacity 3,2 l/min (max)

Electronic deceleration Absolute encoder

Operating ambient

temperature -15°C ÷ +65°C

Weight 85 kg (65 kg body +

20 kg housing)

Oil type FA...


Specification

The housing is non load-bearing and may be easily replaced, with the upright post remaining in place. It is available in stainless-steel or steel versions, with the innovative, ...




Scan product





Ref: KTI0200200DTQEH

Ref: KTI0200200DTQIK4



Ref: KT10200200DTQIK7

Boom Barrier Ditec QIK7eh 4 Meter



Boom Barrier Ditec QIK7eh 4 Meter

Power supply - 230 V ~ 50/60 Hz

Absorption - 1 A

Line fuse - F1,6A

Torque - 70 Nm

Insulation class - Class 1

Opening time - 2÷6 s/90°

Closing time - 2÷6 s/90°

Bar length (max) - 6000 mm

Service class - 5 - VERY INTENSE

Intermittence - S2 = 60 min, S3 = 60%

Temperature - min -20°C max +55°C

Degree of protection - IP24D

Control panel - EL31R

Specification

An omnipolar disconnection switch with minimum contact gaps of 3 mm must be included in the mains supply.

Check that upstream of the electrical installation there is an adequate re...



Scan product

Ref: KT10200200FAAC5

Boom Barrier 5 Meter FAAC 620 BASIC



Boom Barrier -5 meter

Boom Barrier: CAR TRAFFIC BARRIER 620 BASIC HYD (MAX

BEAM LENGTH 5 MTR) OPEN/CLOSE TIME 3.5 TO 4.5 SEC

(IP-44 /CE Certificate)

Model No - FAAC 620 BASIC (Without Inbuilt loop detector)

Make - FAAC

Power supply voltage- 230 Vac(+6%-10%)-50 Hz

Absorbed power- 7 W


Motor maximum load- 300 W

Power supply for accessories - 24 Vdc

Accessories max. current - 500...



Scan product



Ref: KT10200200KGVB6

Godrej Boom Barrier Without LED 6 Meter Length DC motor GVB6

Model No. GVB6

- Housing Thickness: 1.5 mm thickness for higher strength and reliability
- Inbuilt anti crash safety feature
- Better Visibility: White aluminum boom bar with reflective strips and Dark Gray powder coated housing
- IP54 Protection: Control unit is IP - protected making it dust and water resistant
- Optical Beam Sensor: Safety device to detect presence of vehicle...



Scan product

Ref: KT10200200NAPFX

Boom Barrier 7 Meter with led Neptune

Make - Neptune

Model Power Fusion XD

Power supply 220 - 240V AC 50/60 Hz

Electric motor 24V DC brushless

Max. power- 200 watt

Max. torque - 400 - 600 Nm

Opening/closing speed -2.5 to 5 Sec

Surface treatment Pre hot dip galvanized and dust painted

Encoder -Integrated with motor


Beam type -Elliptical with rubber gasket and plastics

Protection class - IP 65

use Frequency - 1...



Scan product



Ref: KT10200200PAT6D

Boom Barrier With DC Motor without led 4 to 6 Meter



MODEL NO.-PAT 6D (DC BRUSHLESS MOTOR)
MECHANISM-ELECTRO-MECHANICAL
POWER SUPPLY -220-230V AC, 50-60 HZ/110V AC 60 HZ
Duty Cycle -100%
Control Voltage -24 DC
Power Consumption -120 W
OPENING/CLOSING SPEED -4 - 6 SECS
MAXIMUM BOOM LENGTH -UP TO 6 METERS TELESCOPIC
BOOM
HOUSING -GALVANISED MILD STEEL + RA POWDER COATED
OR SS HOUSING (OPTIONAL)
MTBF -10 MILLION OPERATIONS



Scan product

Ref: KT1020020TSB300

Technospacio Boom Barrier TSB300




Technospacio Boom Barrier TS-B-300
Brand Name: TECHNOSPACIO
Model: TS-B-300
Operating Speed: 1.5 s to 6 s
Boom Length: 3 m to 6 m
Boom Type: Telescopic Straight Boom
Motor Type: DC 24V Brushless Motor
Output Power: 150 W
Operating Voltage: DC 24V
Power Supply: AC 220V/110V, 50 Hz to 60 Hz
Remote Control Distance: ≤ 30 m
Operating Temperature: -30°C to 75°C
Protection Level: IP5...

Specification

The Technospacio-Boom Barrier-300 Series is a high-reliability DC brushless boom sbarrier designed for continuous operation in demanding environments such as apartments, toll gates...



Scan product



Ref: KT1020020TSB500

Technospacio Boom Barrier TSB500



Technospacio Boom Barrier TS-B-500
 Brand Name: TECHNOSPACIO
 Model: TS-B-500
 Operating Speed: 0.5 s to 6 s
 Boom Length: 3 m to 6 m
 Boom Type: Telescopic Straight Boom
 Motor Type: DC Servo Motor
 Output Power: 200 W
 Operating Voltage: DC 24V
 Power Supply: AC 220V/110V, 50 Hz to 60 Hz
 Remote Control Distance: ≤ 100 m
 Operating Temperature: -30°C to 75°C
 Protection Level: IP54
 Dimen...

Specification

The Technospacio-Boom Barrier-500 Series, Intelligent Barrier Gates are designed to provide outstanding durability and dependable long-term performance through precision production...



Scan product

Ref: KT102002GSBBEDC6

Boom Barrier Without LED 4 to 6 Meter Length GSBBEDC6




Boom Barrier Without LED 4 to 6 Meter Length GS-BBEDC6
 MECHANISM TYPE: ELECTRO-MECHANICAL
 CONSTRUCTION: MS POWDER COATED
 NOISE:

Specification

CONSTRUCTION:
 Heavy duty material used for internal assembly
 High grade MS sheet for external housing with air ventilators
 Key lock to provide secure access to electronics and conn...



Scan product



Ref: KTI04007001SLCS

Safety Curtain Sensor

Single Output Safety Light curtain
 Model : LC 1290-410 -1OP-CW-OA
 For outdoor application
 Output :PNP NC
 Supply : 24V DC
 No. of Beams : 12
 Pitch : 90mm
 Protected height : 990 mm
 Overall Height : 1125 mm
 Range : 10 Mtr.



Each Set Consists:-

1. Transmitter - 1 No.
2. Receiver - 1 No.
3. Cable - 2 Nos.
4. Controller (1OP-CW) - 1 No



Scan product

Ref: KTI90006001P1FP

Flame Proof Push Button

Flame Proof Push Button Set With One Switches (Green).
 * Color Combination Can Be Changed on Request.
 * NO/NC Combination Can Be Changed on Request.
 * Push Button Size and Appearance Subject to Change Without Prior Notice.
 Warranty:- Not Applicable



Scan product