



## N-Bio101 W

### Advance Multi Bio



Face



Finger



RFID



Inbuilt  
Battery



WiFi



LAN



USB



GPRS  
(Optional)



Access  
Control

## Multi-Bio Attendance and Access Control

### Storage Capacity

|                 |          |
|-----------------|----------|
| Face Capacity   | 2000     |
| Finger Capacity | 5000     |
| Card Capacity   | 2000     |
| Max User        | 2000     |
| Log Capacity    | 1,50,000 |

### Features

High-Speed and Accurate Face Identification

Good adaptation for dry, moist and rough fingerprints.


Output relay for door open.

Face, Fingerprint, Card, Password authentication

Supremely low Electric energy consumption.

Highly reliable and durable.

Comprehensive SDK is available for development and integration.

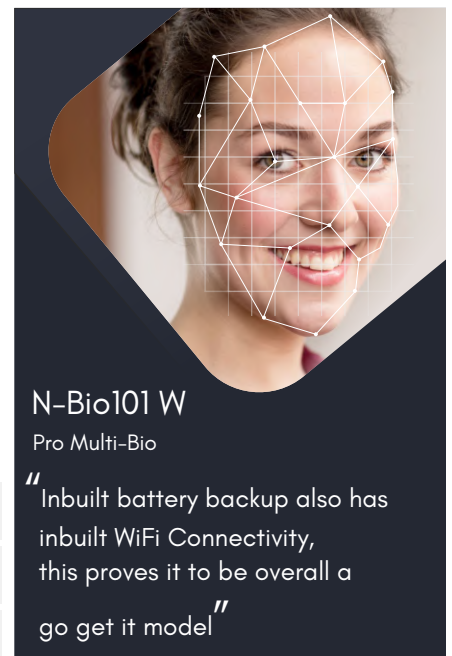

N-Bio101 W

Pro Multi-Bio

"Inbuilt battery backup also has inbuilt WiFi Connectivity, this proves it to be overall a go get it model"

## Communication Interface

|               |                              |
|---------------|------------------------------|
| Communication | WIFI, TCP/IP, RS232/485, USB |
|---------------|------------------------------|

## Biometric

|                   |                                                      |
|-------------------|------------------------------------------------------|
| Push Data         | YES                                                  |
| 4G GPRS           | Optional                                             |
| Sensor type       | 500 DPI                                              |
| FAR               | 0.00001%                                             |
| FRR               | 0.001%                                               |
| Processor         | 1 GHz                                                |
| OS                | Linux                                                |
| Verification time | <=1 second                                           |
| RF card options   | 125kHz EM (Standard) /<br>13.56MHz Mifare (Optional) |

## Audio/Visual

|                   |                                       |
|-------------------|---------------------------------------|
| LCD               | 2.8" TFT color screen                 |
| Voice instruction | 16-bit Hi-Fi voice & sound indication |
| Language          | English                               |

## Access control

|                  |                                                               |
|------------------|---------------------------------------------------------------|
| Wiegand in & out | YES                                                           |
| Relay            | YES                                                           |
| Support          | RS485 Reader, Wiegand Reader,<br>Remote Push Button, No Touch |

## Power & Enviroment

|                       |                    |
|-----------------------|--------------------|
| Inbuilt Battery       | YES                |
| Operating Temperature | 0°C ~ 50°C         |
| Power                 | 12V DC / 2A        |
| Dimension             | 175 x 145 x 79.5mm |



Auto Focus



low light Verification



Long Distance Verification



Accepts Color Finger

### Software

Desktop, Web, Cloud



Time Attendance



Access Control



Employee Self Service



Mobile App

**Disclaimer :** Brief specifications are mentioned here. specification may change without prior notice. Customers are advised to check with us before purchase. Actual product may differ slightly to that depicted for ongoing product development.

Certified by



[www.biomaxsecurity.com](http://www.biomaxsecurity.com)

### Connect with us on



BiomaxOfficial



BioMax Security



biomaxsecurity



BioMax Access Control