

## N-E90 Pro



Finger



RFID



Inbuilt Battery



WiFi



LAN



USB



Access Control

## Time Attendance and Access Control

### Storage Capacity

Finger Capacity	2000
Card Capacity	2000
Max Users	2000
Password	2000
Log Capacity	1,50,000

### Features

High-Speed and Accurate Fingerprint Identification

Fingerprint, Card, Password authentication


output relay for door open.

Good adaptation for dry, moist and rough fingerprints.

Supremely low Electric energy consumption.

Highly reliable and durable.

Comprehensive software development kit(SDK) is available for development and integration.

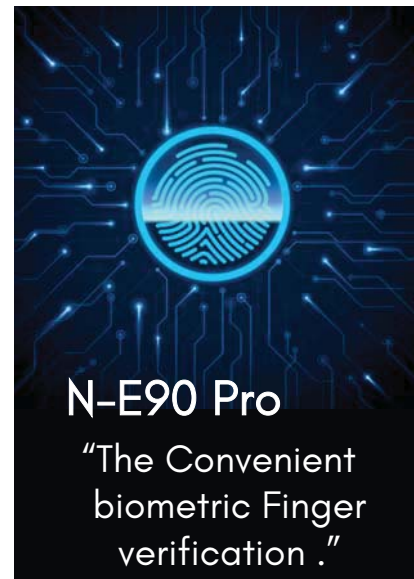

# N-E90 Pro

## Communication Interface

Communication	WIFI, TCP/IP, USB
---------------	-------------------

## Biometric

Push Data	YES
Sensor type	500 DPI
FAR	0.00001%
FRR	0.001%
OS	Linux
Verification time	<=1 second
RF card options	125kHz EM (Standard) / 13.56MHz Mifare (Optional)



Accepts moist and rough Finger



Accepts Color & Mahendi Finger



Durable and Rigid Body



Unaffected by High  
Temperatures 0° ~ 50°

## Audio/Visual

LCD	2.4" TFT colour screen 320X240 pixel
Voice instruction	16-bit Hi-Fi voice & sound indication
Language	English

## Access control

Relay	YES
Support	Remote, Push Button, No Touch

## Power & Enviroment

Inbuilt Battery Backup	YES
Operating Temperature	0°c ~ 50°c
Power	12V DC / 2A
Dimension (L*H*W)	180 x 130 x 45 mm

### Software

Desktop, Web, Cloud



Time Attendance



Access Control



Employee Self Service



Mobile App

**Disclaimer** : Brief specifications are mentioned here. specification may change without prior notice. Customers are advised to check with us before purchase. Actual product may differ slightly to that depicted for ongoing product development.

Certified by    

www.biomaxsecurity.com

### Connect with us on



BiomaxOfficial



BioMax Security



biomaxsecurity



BioMax Access Control