
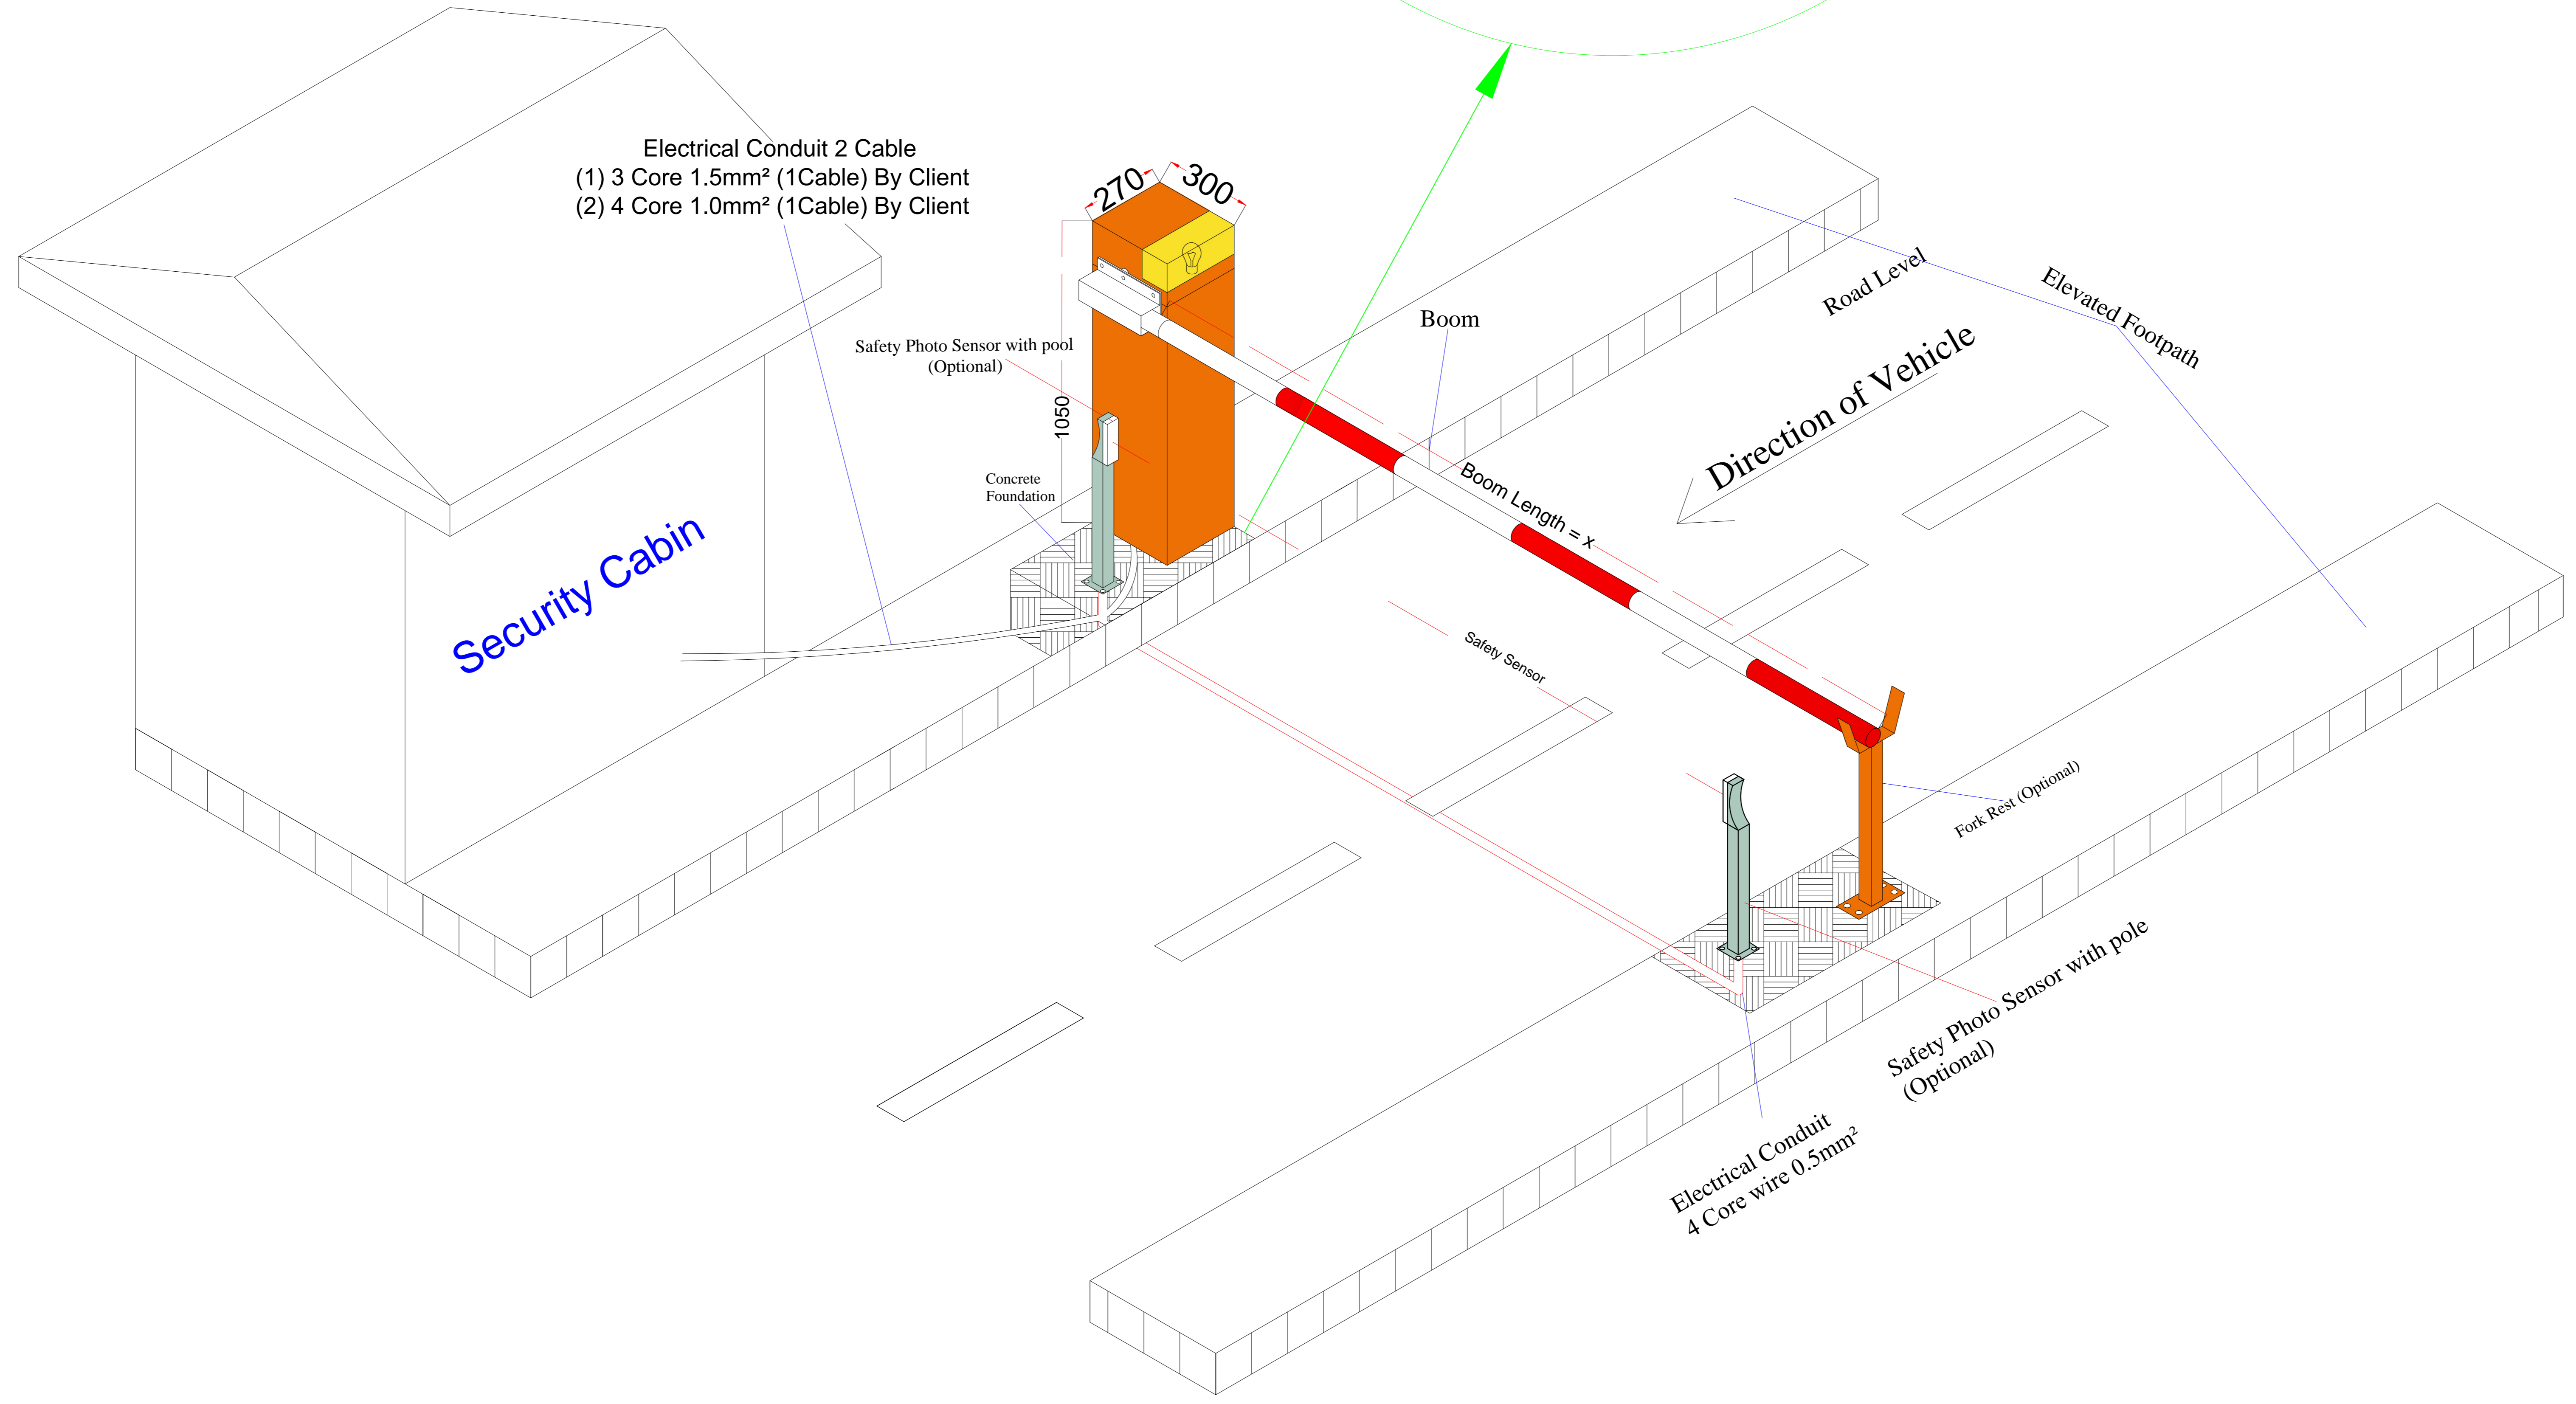


Front View

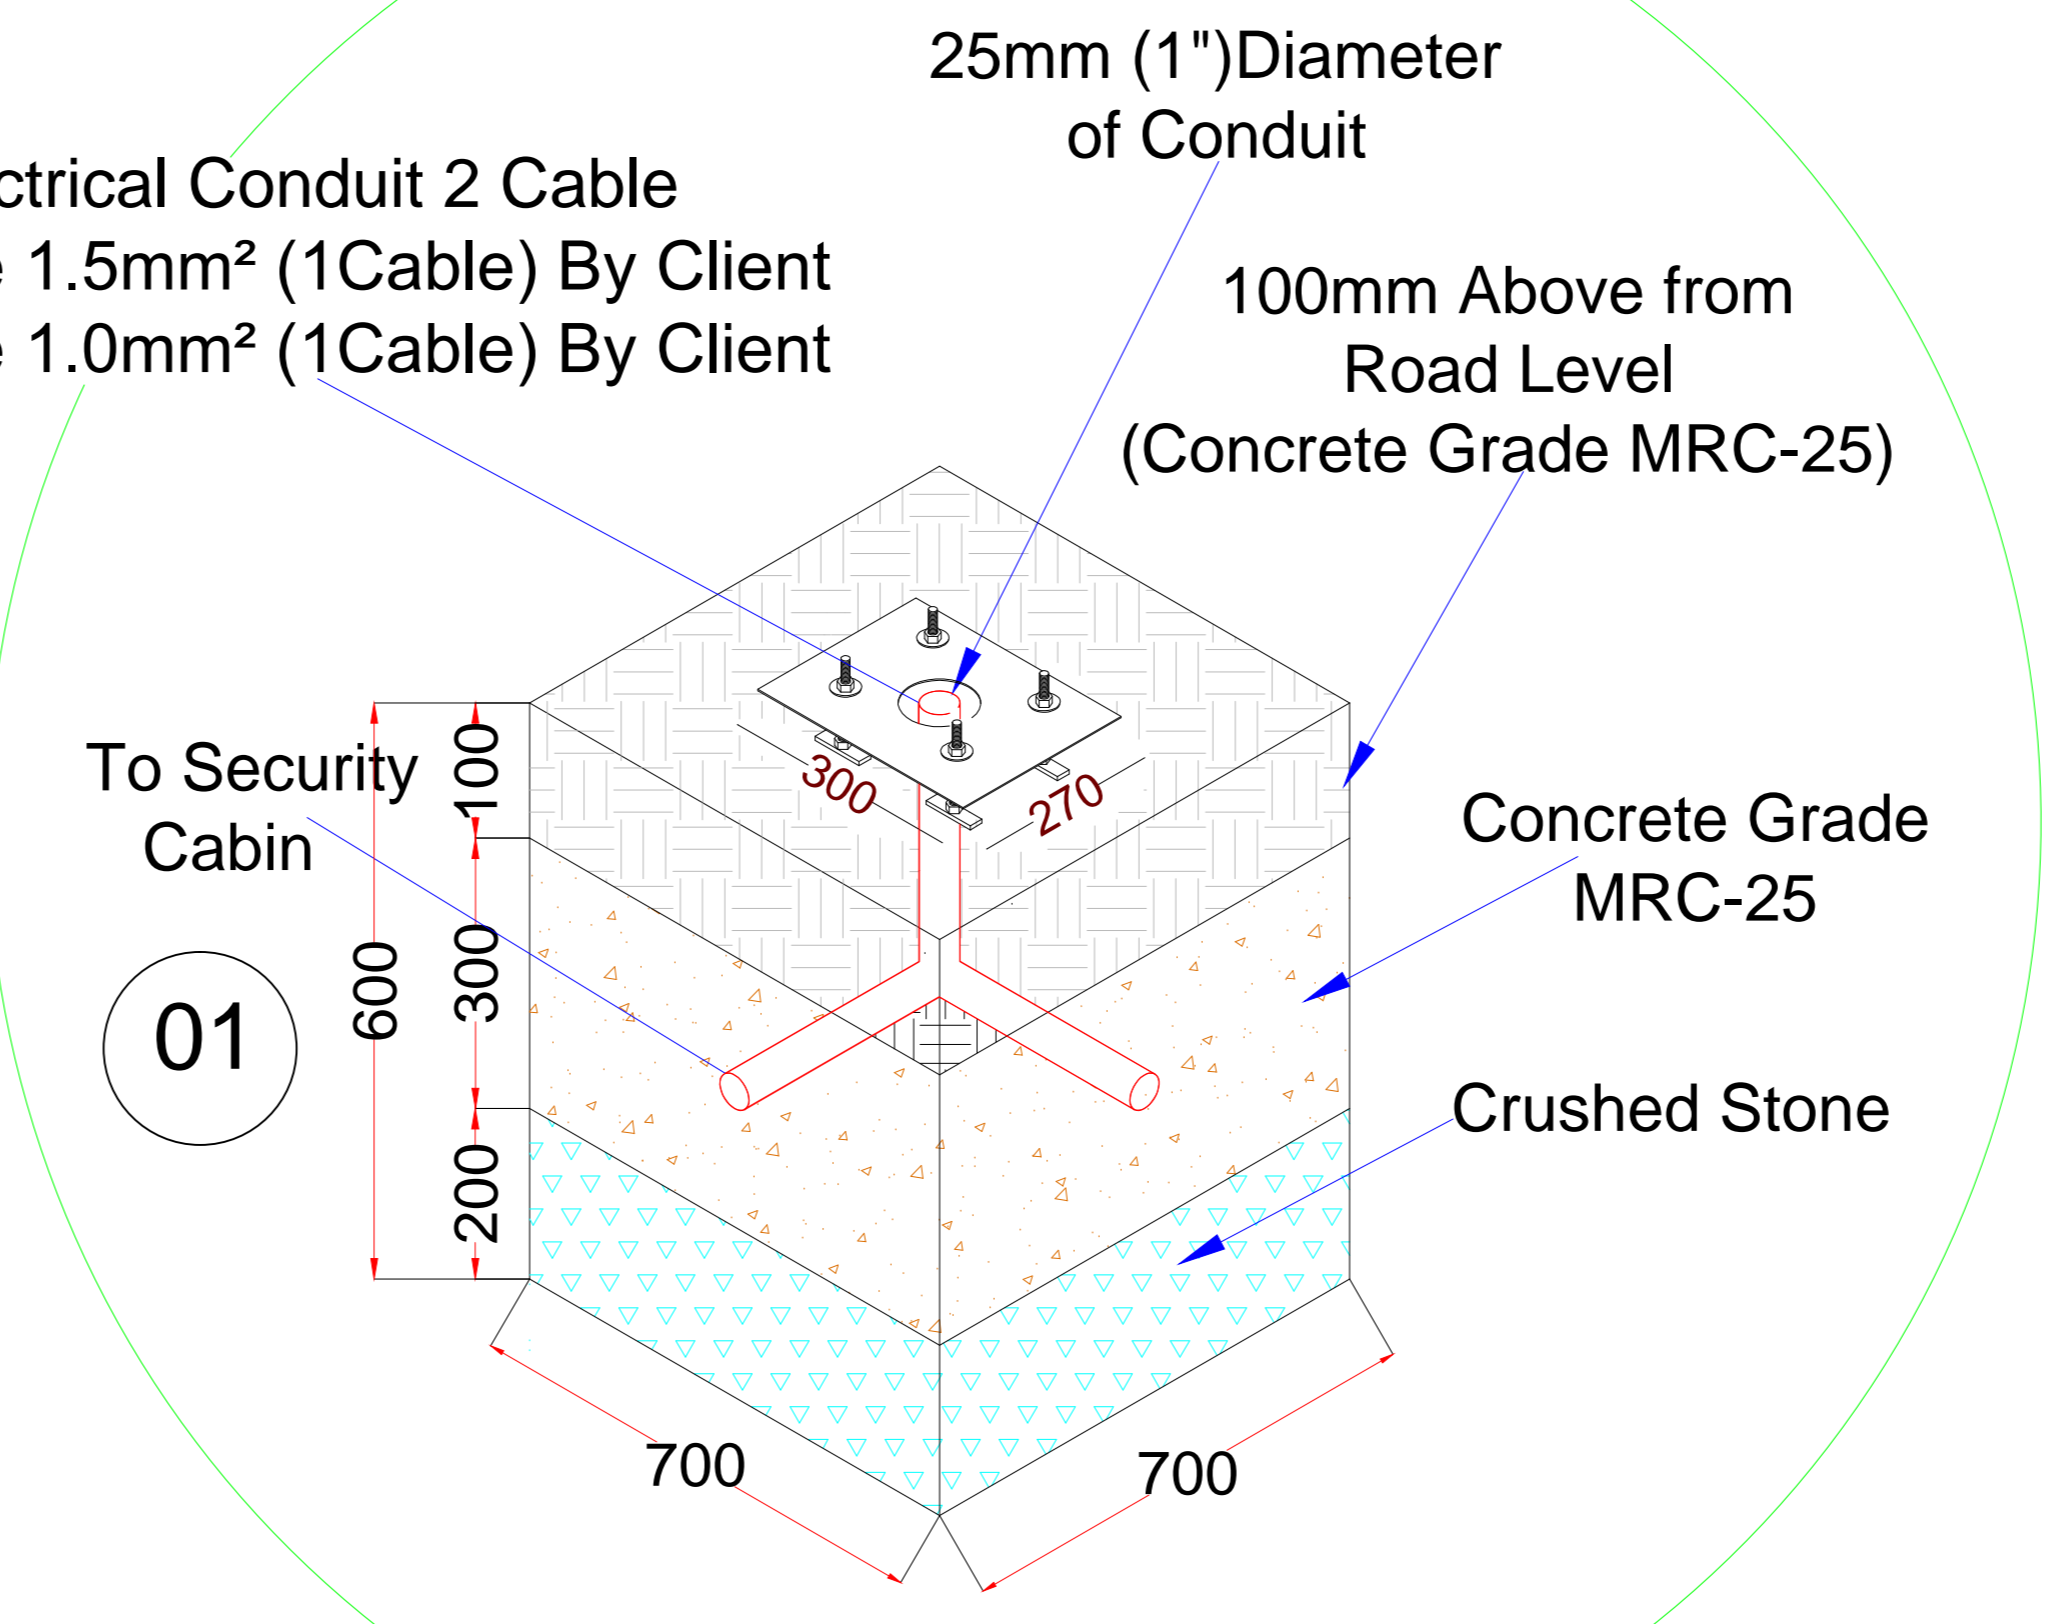

Rapid N barrier Layout		
Type	----	
Motor Location	Boom Length	Qty.
---	--	--

Power/Electrical Requirement	
Phase	1 Φ
Voltage	230 V
Frequency	50 HZ
Current	Max. 5 Amp.

SCALE-NTS

GROUP :- Automatic Boom Barriers PRODUCT :- Auto Barrier MODEL NO:- Rib Normal Barrier

This drawing is the soul property of (TAS) Do not copy/reproduce /share with others without our permission.

REV	DATE	DESCRIPTION	DRAWN BY	APPROVED BY	DATE	DRAWN BY	CHECKED BY	APPROVED BY
00	12-04-2020	ISSUED FOR APPROVAL	SOHRAB KHAN	KAPIL SACHDEV	12-04-2020	SOHRAB KHAN	KAPIL SACHDEV	KAPIL SACHDEV

PRO NO:- 915 DRAWING NO :- GA-248(PRO915) Rib Normal Barrier

