



9001:2015  
Certified



Automation Redefined

# Toshi Barrier

## Model - NORMAL




Toshi Automation barriers provide practical and cost effective vehicle management solution. Auto barriers are reliable require little maintenance and can interface with any access control systems. Designed for 27x7 operations in very high traffic situations.


Technical Specifications :

Max. Boom Length (M)	6.5 to 8mtr in round aluminium Boom (80/75mm OD)
Boom Weight (KG)	1.75kg per meter
Max. Torque (NM)	300
Opening Time (Sec)	11
Power Supply (V)	230
Motor Capacity (W)	130
Power absorbed (A)	0.6
Weight of Operator (KG)	145
Protection Grade (IP)	55
Daily Cycles Suggested (n°)	1000
Service (%)	100
Operating Temp (°C)	-10 to +55
Colour	RAL 2000 for Barrier White with red reflective for Boom
RS-485	Inbuilt
MBTF	0.2 Million

Barrier Direction

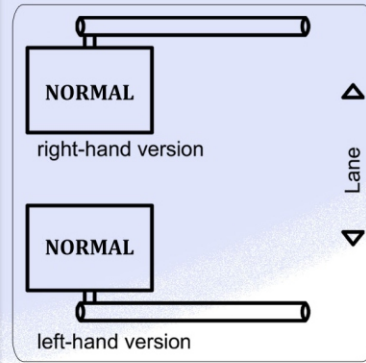

(Also Available with park 230V Circuit instead of TG-700)

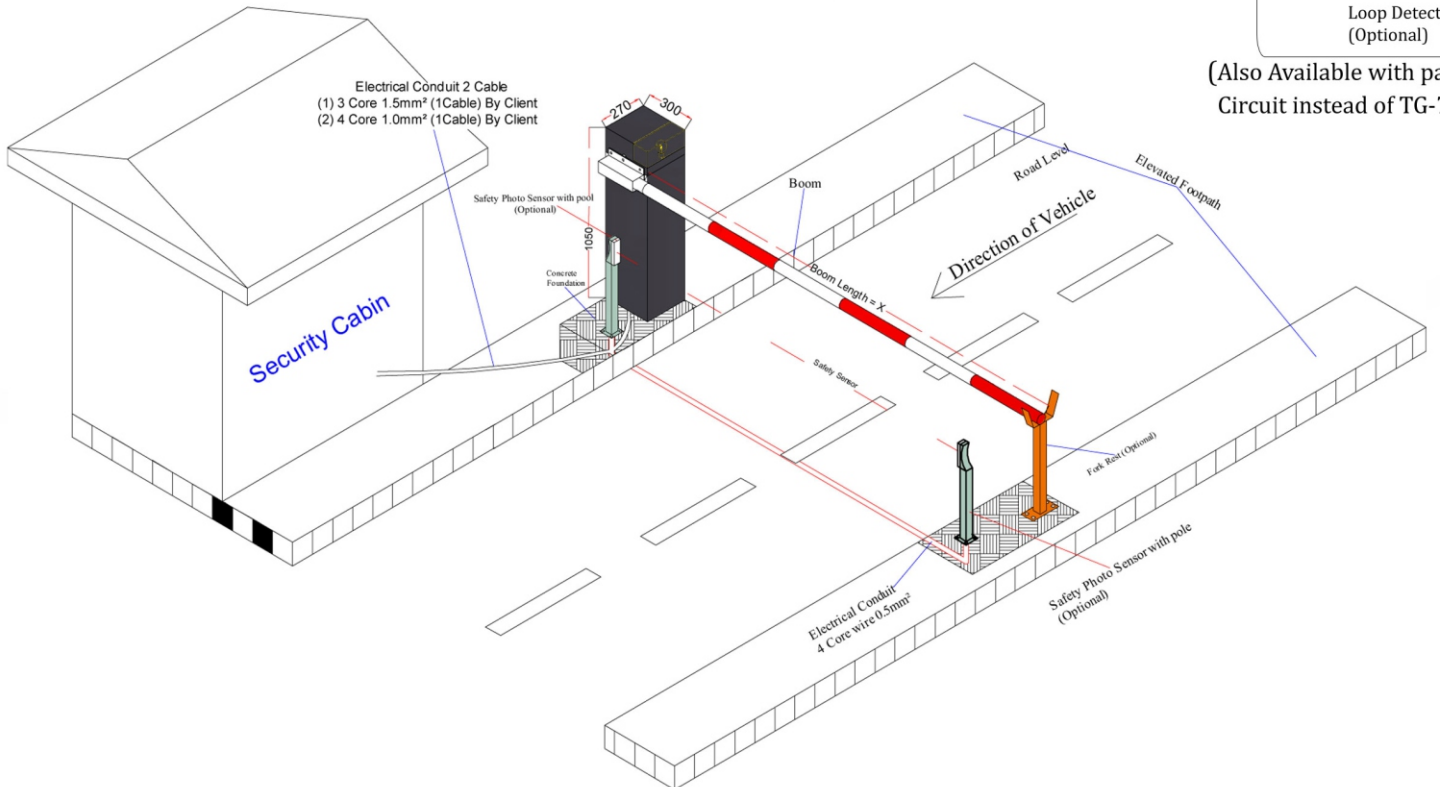

**Toshi Automation Solutions**

Plot No. A-1/244, Sector-17 Kavi Nagar Industrial Area, Ghaziabad. Uttar Pradesh Pin Code : 201009  
 +91-8287116904  
 sales@toshiautomation.com www.toshiautomation.com