



Performance

Speed range	1-200 mph (1-321 km/h)
Speed resolution	1 mph (1 km/h)
Speed accuracy	+/- 0.3%
Range	900 feet (274 meters)
Update rate	20 times per second
Directivity	Closing, away, or both
Cosine adjustments	2 axis

Power



Voltage	10 to 30 VDC
Power	<1.5 watts
Current @ 12 VDC	125 mA

Microwave

Frequency	24.125 GHz (US) 24.200 GHz (EU)
Power	100 mW
Beam width	30° by 32°
Certification	FCC part 15

Environmental and Packaging

Temp. range	-30° to +70°C
Ingress rating	IP67
Housing	Die-cast aluminum
Size	4.4 x 3.9 x 1.6 inches (11.2 x 9.9 x 4 cm)
Mounting	4 x 10-32 UNF

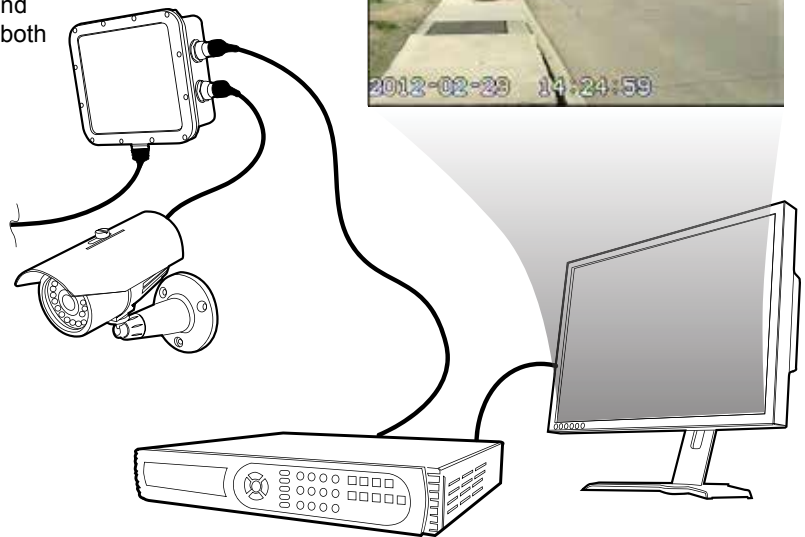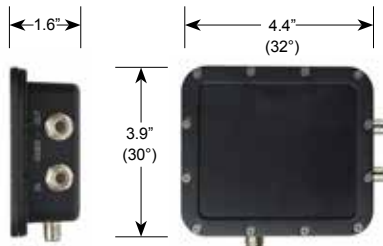

Accessories

For a complete list of available accessories, go to our Web site at www.StalkerRadar.com.



STALKER® Intelligent Technologies



800-STALKER

applied concepts, inc.

StalkerRadar.com

2609 Technology Drive ■ Plano, Texas 75074 ■ 972.398.3780 ■ Fax 972.398.3781