



TRUST POLE METAL DETECTOR / WALL TYPE METAL DETECTOR

TSS-POL 5 Zone

Trust Pole Metal Detector/ Wall Type Metal Detector (TSS-POL 5 Zone) scans people for the Metals carried by them. It ensures no unauthorised person carries Metal into or out of a facility. The metal detector comes in a Single frame with 5 multi-zone detectors.

The single panel detector solves the problem of two-way passage, and the detection can be achieved in a narrow passage, which reduces the area of the traditional security door by 50%

SPECIFICATIONS :

Detection objects : Prohibited goods such as mobile phone and metal

Modular product

Easy maintenance

Special material High-intensity & lightweight

Production line assembling Ultra high precision

Detection ability: more than 100 people in 1 minute

3.7-inch LCD display

Integrated four-button panel operation mode

Pass people statistics function

Alarm statistics function

Password protection

Multi-location simultaneous detection and alarm function

Detection and intelligent distinction of large items

Alarm sound mute mode setting

Alarm volume adjustable mode

Multiple alarm sound selection modes

Infrared start and stop function

Front unilateral location alarm indicator light conversion

Customised sensitivity of each detection defence zone

Each area sensitivity 0-255 adjustable

Safety level 1-100 optional

Independent 5 probe interactive 5 sector



Restore factory setting

Working frequency band: Ultra-wide frequency band (0~100), with adaptive function according to working environment.



STAY SAFE, WITH OUR SAFETY SOLUTIONS

Site Installations

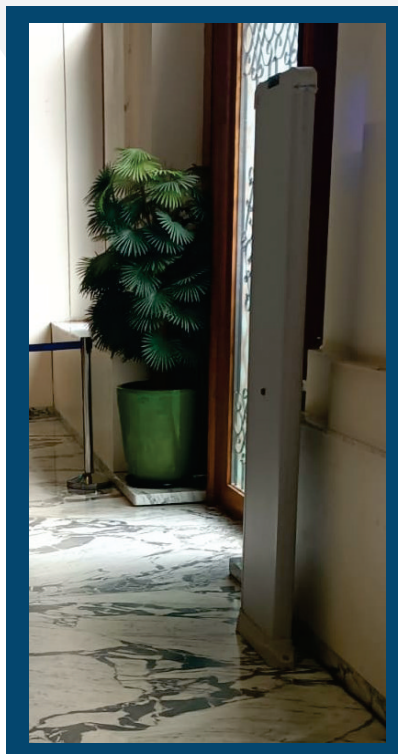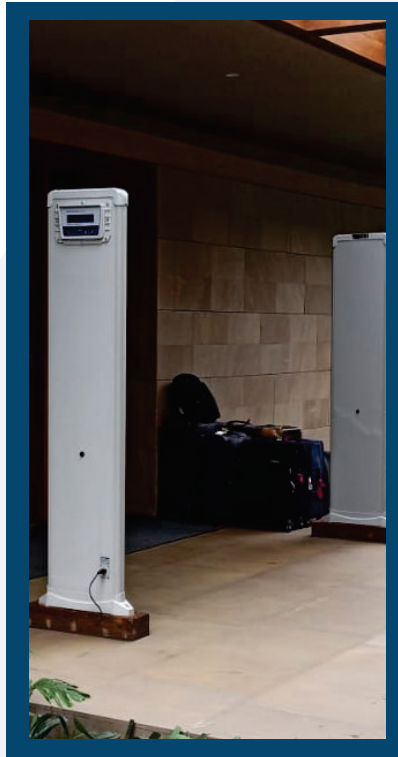

STAY SAFE, WITH OUR SAFETY SOLUTIONS

Schematic Diagram of Defense Area

Detection Mode I: Uni-Direction Detection Mode




Detection Mode II Uni-Direction Detection Mode



Trust Pole Metal Detector/Wall Type Metal Detector (TSS-POL 5 Zone) scans people for the Metals carried by them. It ensures no unauthorised person carries Metal into or out of a facility. The metal detector comes in a Single frame with 5 multi-zone detectors. The single panel detector solves the problem of two-way passage, and the detection can be achieved in a narrow passage, which reduces the area of the traditional security door by 50%

GENERAL SPECIFICATIONS

Package dimension	2100×500×200mm
Vertical dimension	2200×430×70mm
Net weight	20KG
Gross weight	22KG
Operating voltage	AC90V~240V 50/60Hz
Working environment	-20°C~85°C
Power consumption	12W
Operating frequency range	1—50 Bands
Operating environment temperature	-20°C~65°C
Installation environment	(W) 100cm*(L) 200cm(Metal-free minimum range) sheet transverse
Working humidity	99%, no condensation
Regional detect metal precision range	Maximum sensitivity≥10g Metal
Input	AC 100V~240V / 50HZ~60HZ
Output	DC 12V/4.2A 12W
Power supply type	Equipped with polymer battery, Life time can be 8, 16, 24 or 48 hours (optional)
Input	AC 100V~240V / 50HZ~60HZ
Output	DC 12V/4.2A 12W

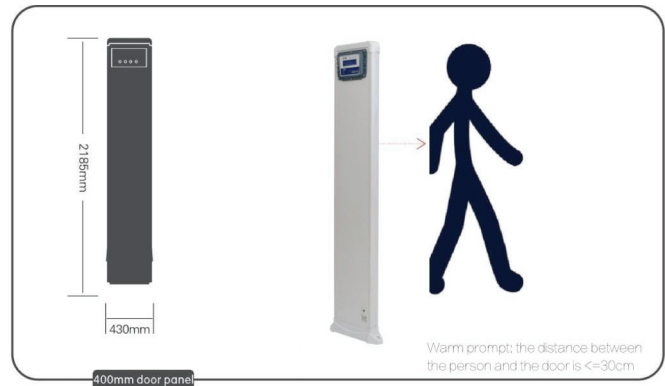

Some of our Esteemed Clientele

Ab Alcobev Pvt Ltd.	Mohali, Punjab
Amanora Mall	Pune, Maharashtra
Ambuja Guras Kutir by Taj	Gangtok, Sikkim
Ambuja Taal Kutir by Taj	Kolkata, West Bengal
Archer Hospitality	North Goa
Astor - A Unit Of Archer	Kolkata, West Bengal
DLF Place Saket	New Delhi
GGL Hotel And Resort Company Ltd	Kolkata, West Bengal
Gurgaon Real tech Limited	Haryana , Gurgaon
Hazel Mercantile Limited	Mumbai, Maharashtra
Kapareva Development Private Limited.	Noida, Uttar Pradesh
Leisure Hotels	Mussoorie, Uttarakhand
Merkur Gaming India Pvt. Ltd	Noida, Uttar Pradesh
Movie Time Cinemas Private Limited	Hyderabad, Telangana
Nanu Resorts Pvt Ltd	Betalbatim, Goa
Palm Beach Hotel	Visakhapatnam, Andhra Pradesh
Paras Hospitals	Srinagar, Jammu And Kashmir
Ramada By Wyndham Hotel	Mussoorie, Uttarakhand
Sands Infrabuild Pvt. Ltd	Kochi, Kerala
Taj Chia Kutir Resort & Spa	Darjeeling, West Bengal
The Manor Hotel	New Delhi
Vivanta Sikkim Taj Hospitality	Pakyong, Sikkim