
Key Features

- All-in-one myViewBoard™ suite with Whiteboard, Display, and Manager
- Pen-on-paper writing experience with Ultra Fine Touch Technology
- Front-facing dual speakers to deliver attention-grabbing sound
- · Webcam bracket easily attached with camera for better engagement
- Quad Core CPU with upgraded storage powered by Android 9.0 OS



Product **Description**

The ViewBoard® 32-2 series is an advanced model that provides a comprehensive solution for schools and teachers looking to deliver more interactive and engaging lessons. Clearer colors, more vibrant contrast, and less glare are achieved thanks to 4K UHD display's bonding technology. With 20-point touchscreen interface, users collaborate naturally either with a finger or one of the ViewBoard styluses. The display integrates Ultra Fine Touch Technology which brings a paper-like writing experience with instant response and high accuracy. The dual-tip pen support allows you to simultaneously write or draw with two different colors. Seamless software integration is assured by the built-in access to the myViewBoard suite that brings together all the hardware. With upgraded RAM and storage, ViewBoard 32-2 Series offers instant connectivity and effortless usability for classroom engagement.

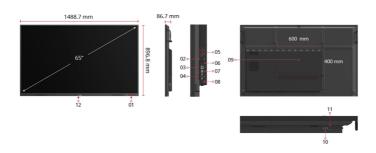

- 1. Smart Port USB™ X 2
- 2. Camera
- 3. LAN
- 4. RS232
- 5. HDMI X 2
- 6. USB 2.0

- 8. Touch
- 9. Audio Out
- 10. VGA 11. Audio In
- 12. Wi-fi Module Slot

7. VESA® Wall Mount600 x 400mm

Visit Us www.viewsonic.com

DISPLAY		BUNDLE SOFTWARE	
Panel Size:	65"	Basic Annotation Software:	myViewBoard Whiteboard
Panel Type:	TFT LCD Module with DLED Backlight.		myViewBoard Whiteboard for
Display Area (mm):	1428.48(H)x 803.52 (V) (64.5" diagonal)	Pro Annotation Software:	Windows (Embedded in optional Windows Slot-in PC)
Aspect Ratio:	16:9		myViewBoard Display
Resolution:	UHD 3840x2160(Pixels)	Wireless Presentation: SPECIAL FEATURES	& ViewBoard Cast
Colors:	1.07B colors (8bit+FRC)	(co PC All-in-one USB port: por "Sn	(combine slot-in
Brightness:	350 nits (typ.)		port) Front "SmartPort™ USB" to
Contrast Ratio:	4000:1		all channels.
Response Time:	6.5ms	Simple LAN sharing between IFP	10/100M for Android &
Viewing Angles:	H=178, V=178typ.	and slot-in device:	Slot-in PC
Backlight Life:	50,000 Hours (Min)	Light Sensor:	Yes
Surface Treatment:	Hardness: 9H Anti-	POWER Voltage:	
ouridoo rrodiinent.	glare coating		162V-264V +/- 10%
Orientation:	Landscape	Consumption:	On: 175W(typ.) Off: ≤ 0.5W\
PLATFORM		ERGONOMICS	
Processor:	ARM quad-core Cortex-A55	Wall Mount (VESA®):	600*400
RAM:	4GB DDR4	OPERATING CONDITIONS	
Storage:	32 GB	Temperature (° C):	0°C to 40°C
TOUCH		Humidity:	10% ~ 90% RH non-
Type/ Tech:	Ultra Fine Touch		condensing
.,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	Technology	DIMENSIONS (W X H X D)	4400,007,007
Touch Point:	20 points touch, 2 points writing	Physical (inch / mm):	1489×897×87 mm / 58.6x35.3x3.4 in
INPUT		Packaging (inch / mm):	1628×208×1005 mm / 64x8.2x39.5 in
HDMI:	HDMI 2.0 x2 (3840x2160 @60Hz)	WEIGHT	
RGB / VGA:	x1	Net (lb / kg):	38.3kg/84.4lb
Audio:	x1	Gross (lb / kg):	46.0kg/101.4lb
RS232:	x1	REGULATIONS	
OPS:	x1 (Optional Intel	BIS, CB, CE,LBL(Low Blue Light Certification)	
	Standard OPS)	PACKAGE CONTENTS	
WiFi:	x1 (Optional VB-WIFI- 002/VB-WIFI-004)	1. Power cord / 2.Remote control with AAA battery / 3.USB touch cable / 4. Touch pen x 2 / 5. Quick Start Guide + Compliance statement / 6. RS232 adapter / 7. Screw x 4 (wall mount 4) / 8. HDMI cable / 9. Clamp x5 /	
OUTPUT			
Audio:	x1	10. Camera plate x1	
LAN		COMPATIBLE SLOT-IN PC	
RJ45:	x1	VPC12-WPO/VPC25/VPC2C/VPC27 series	
USB		_	
Type A:	USB2.0 Front x2; Side x2		
Туре В:	x1 for HDMI/VGA touch		
SPEAKERS			
10W x 2			
TOP CAMERA PLATE		-	
Yes			
EMBEDDED OS			
Android 9			

 $\label{thm:copyright} \ @\ ViewSonic\ Corporation\ 2000-2022.\ All\ rights\ reserved.$