



PEL LED NM (1200) - 40W

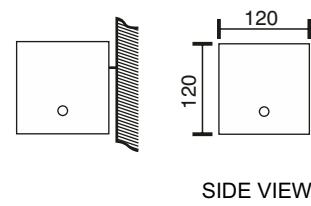

GA Diagram:

Dimensions (in mm)

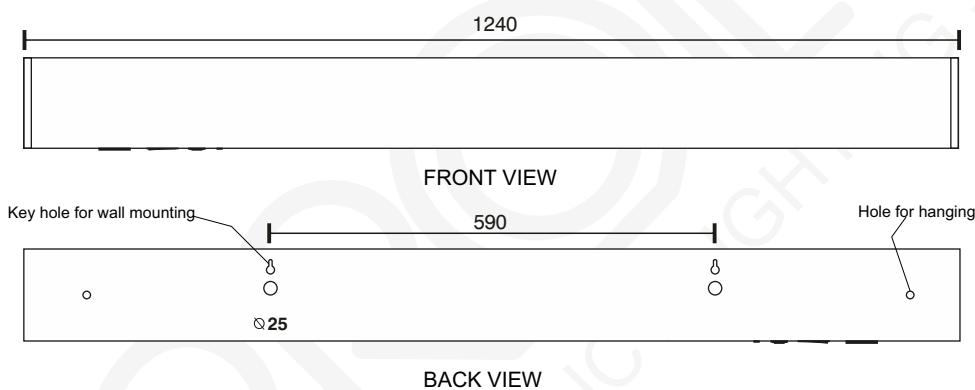

SIDE VIEW

Application:

Automatically switches – **ON**, on mains power failure & provides illumination on battery source for specified duration, after which the battery gets automatically cut-off, to facilitate quick recharge on the resumption of mains supply. Once the battery is totally charged, it automatically slides into trickle charge to constantly retain the charge and be ready for immediate use. **Non-Maintained**

Tolerance on overall dimensions is ± 5 mm unless otherwise specified. | Please Note: Other Input Voltage Is Also Available – Price On Request (POR). | Due to continuous development, specifications may change without prior notice.

Technical Specifications

AS PER	IS - 10322
INGRESS PROTECTION	IP 20
HOUSING	22 SWG MS CRCA FABRICATED.
PAINT & COLOUR	EPOXY POLYESTER POWDER COATING, WHITE IN COLOUR.
DIFFUSER	OPAL ACRYLIC DIFFUSER.
INPUT (V)	~230 VOLTS, 50 Hz; ±10%.
LED	40 WATT, MULTIPLE LEDs, HIGH LUMENS OUTPUT.
LED MAKE	SEOUL, BRIDGELUX, EDISON, OSRAM.
CCT	6500K ±500K.
BATTERY TYPE	SLA RECHARGEABLE BATTERY.
DURATION	120 MINUTES BACK UP; ±10%.
CHARGING TYPE	CONSTANT VOLTAGE CHARGER.
RECHARGING CYCLE	10 TO 12 HOURS RECHARGING PERIOD.
MOUNTING TYPE	CEILING / ON WALL THROUGH 2 NO'S OF KEY HOLES.
WEIGHT	7 KG. APPROX.
INDICATION	RED LED "ON" INDICATES CHARGING.
APPLICATION	FOR OUTDOOR DOMESTIC & COMMERCIAL PURPOSE, CORRIDORS OF HOTELS, BATTERY & PUMP ROOMS, STAIRCASES, UNDERGROUND PARKING.

Tolerance on overall dimensions is ± 5 mm unless otherwise specified. | Please Note: Other Input Voltage Is Also Available – Price On Request (POR). | Due to continuous development, specifications may change without prior notice.

PEL / TDS NO-8611