




GEL LED MBL/NM	EXIT
Non-Maintained	Maintained
3 hrs. Backup	3 hrs. Backup
IP 20	IP 20
Also available in Black Body	




TECHNICAL DATA SHEET EMERGENCY EXIT LIGHT

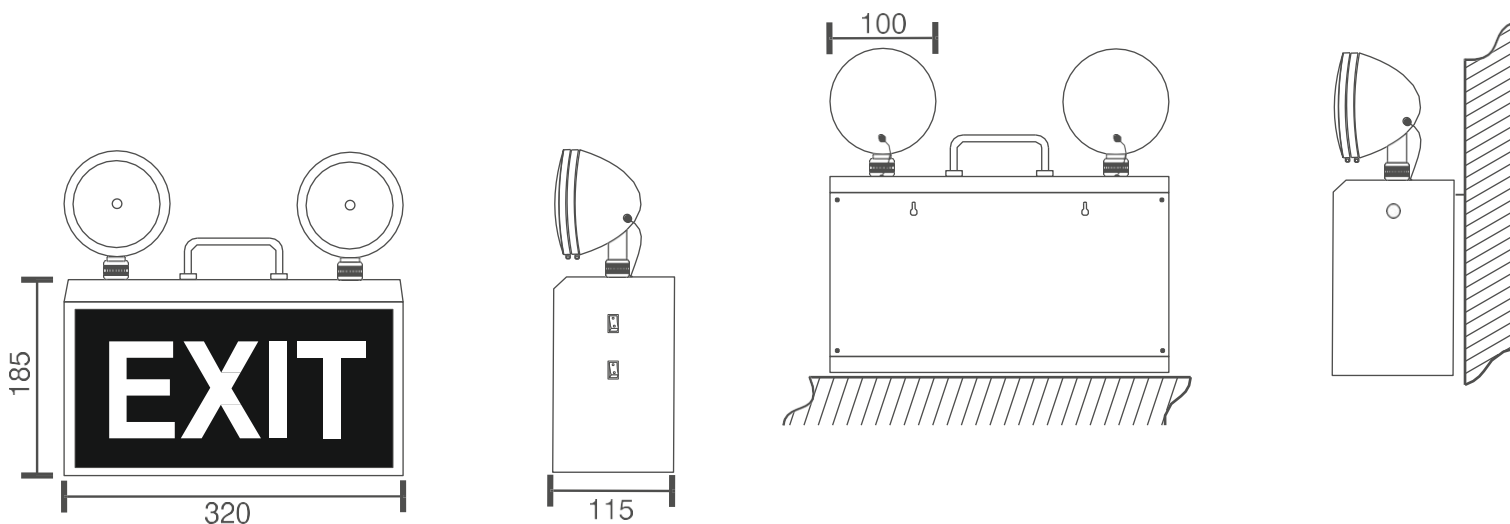

GEL LED MBL/NM

Consist of twin tungsten halogen lamps automatically switches - **ON**, on mains power failure & provides illumination on battery source for specified duration, after which the battery gets automatically cut-off, to facilitate quick recharge on the resumption of mains supply. Once the battery is fully charged, it automatically slides into trickle charge to constantly retain the charge and be ready for immediate use.

DIMENSION (in mm)

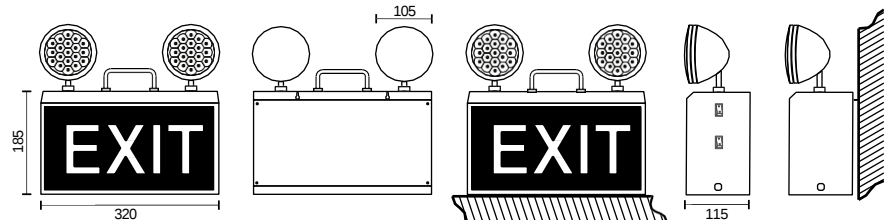

TECHNICAL SPECIFICATIONS

CONFIRMS	: IS: 10322	R
INGRESS PROTECTION	: IP-20	
HOUSING	: MADE UP OF C. R. C. A. SHEET STEEL-22 S. W. G.	
PAINT & COLOUR	: EPOXY POLYESTER POWDER COATING, WHITE IN COLOUR.	
LAMP HOUSING, & DIFFUSER	: MADE UP OF C. R. C. A. SHEET STEEL, EPOXY POLYESTER POWDER COATED WHITE IN COLOUR GLASS DIFFUSER.	
REFLECTOR	: WELL COUNTERED ELECTROCHEMICALLY BRIGHTENED. MADE UP OF POLYCARBONATE.	
LAMP	: LED LAMPS.	
DIFFUSER OF EXIT	: 2 M. M. RED ACRYLIC WITH CAD DESIGNED & CUT, VINYL	
INPUT MAINS CONNECTOR	: - 230 VOLTS. 50 HZ.	
BATTERY	: 5 A. 250 VOLTS, MILKY WHITE POLYCARBONATE WITH ELECTRICAL LITHIUM-ION RECHARGEABLE	
DURATION	: 3 HOURS BACK UP: +10%. B LED LIT EXIT : MAINTAINED TYPE, 5 HOURS BACK UP.	
CHARGING TYPE	: CONSTANT VOLTAGE CHARGER	
RECHARGING CYCLE	: 10 TO 12 HOURS RECHARGING PERIOD.	
MOUNTING	: ON WALL THRU 2 NOS. OF HOLES OR CAN BE USED ON TABLE/SHELF.	
WEIGHT (KG)	: 3 KG. APPROX	
INDICATION	: RED LED "ON" INDICATES CHARGING. : WITH LED LIT EXIT RECHARGEABLE UNIT	
APPLICATION	: COMMERCIAL PURPOSE, CORRIDORS OF HOTELS, BATTERY ROOMS. STAIRCASES, UNDERGROUND PARKING.	

Tolerance on overall dimensions is + 5 m. m. unless otherwise specified. | Please Note: Other Input Voltage Is Also Available