


EXIT SIGN

GUST-09/2021



GA Diagram:

Dimensions (in mm)

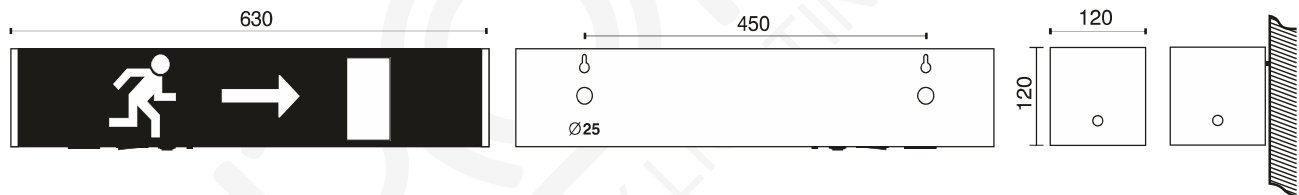

Application:

Provides illumination on normal mains power supply and the same LEDs continues to provide illumination during mains failure on self contained battery source. **ON** resumption of mains supply, the LEDs switches back to the mains automatically & simultaneously starts recharging the battery to the required level.

Maintained models provide uninterrupted illumination

Tolerance on overall dimensions is ± 5 mm unless otherwise specified. | Please Note: Other Input Voltage Is Also Available – Price On Request (POR). | Due to continuous development, specifications may change without prior notice.

Technical Specifications

CONFORMS TO		IS - 10322
INGRESS PROTECTION		IP 20
HOUSING		24 MS C.R.C.A. FABRICATED
PAINT & COLOUR		EPOXY POLYESTER POWDER COATING, WHITE IN COLOUR.
DIFFUSER CUM MESSAGE PANEL		2 M.M. THICK MILKY ACRYLIC WITH VINYL PASTED ON IT.
REFLECTOR		WHITE POWDER COATED, C. R. C. A. SHEET- 24 S.W.G.
INPUT (V)		~ 230 VOLTS, 50 HZ; $\pm 10\%$.
LED		20W, MULTIPLE LEDS
LED MAKE		EDISON, OSRAM, GMR LIGHT.
MAINS CONNECTOR		5 A, 250 VOLTS, WITH ELECTRICAL GRADE.
BATTERY TYPE		NI-CD / NI-MH; RECHARGEABLE.
DURATION		120 MINUTES BACK UP; $\pm 10\%$.
CHARGING TYPE		CONSTANT VOLTAGE CHARGER.
RECHARGING CYCLE		16 TO 24 HOURS RECHARGING PERIOD.
MOUNTING TYPE		ON WALL THROUGH 2 NO'S OF KEY HOLES.
WEIGHT		4 KG. APPROX
INDICATION		RED LED "ON" INDICATES CHARGING
APPLICATION		DOMESTIC & COMMERCIAL PURPOSE, CORRIDORS OF HOTELS, BATTERY ROOMS, STAIRCASES, UNDERGROUND PARKING.

