

PEL LED M SQ 600MM (NON-CLEAN ROOM FITTING)




LED Down Lights with Battery Back-up:

Prolite introduces its exciting new range of Compact, Sleek, Recessed mounted battery back-up LED Down Lights which would complement & gel with your interiors to give a new/ modern look and would guide you to the exterior safety in emergency scenarios. Battery back-up LED Down Lights provide you with alternatives Self Contained Emergency Lighting which would help you to relocate your self from the interiors of the premises to the exterior quickly & safely.

Application:

Provides illumination on normal mains power supply and the same LEDs continues to provide illumination during mains failure on self contained battery Source. On resumption of mains supply, the LEDs switches back to the mains automatically & simultaneously starts recharging the battery to the required level.
Maintained.


GA Drawing:

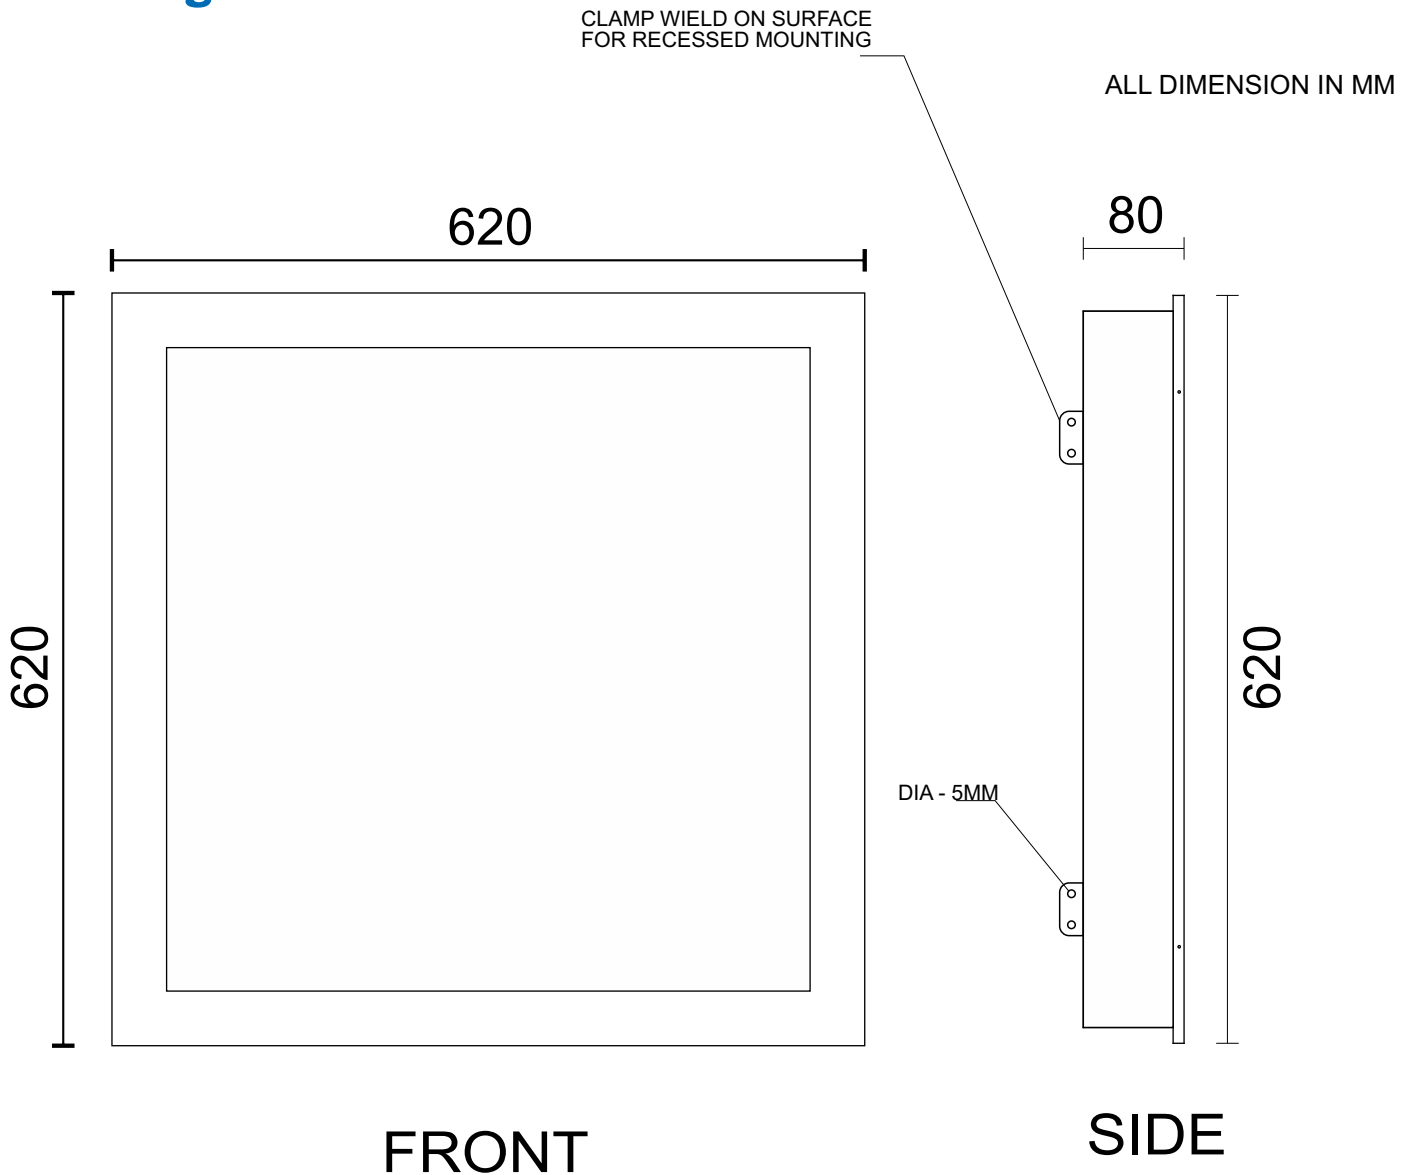

PRODUCT DIMENSION 620X620X80

CUT-OUT DIMENSION 590X590X70

Tolerance on overall dimensions is ± 5 mm unless otherwise specified. | Please Note: Other Input Voltage Is Also Available – Price On Request (POR). | Due to continuous development, specifications may change without prior notice.



Technical Specifications

AS PER		IS : 10322
INGRESS PROTECTION		IP 20
HOUSING		24 MS C.R.C.A. FABRICATED.
PAINT & COLOUR		EPOXY POLYESTER POWDER COATING; WHITE IN COLOUR.
DIFFUSER		OPAL ACRYLIC DIFFUSER.
INPUT (V)		~ 230 VOLTS, 50 HZ; $\pm 10\%$.
LED		36W, MULTIPLE LEDS, HIGH LUMEN OUTPUT.
LED MAKE		SEOUL, BRIDGELUX, EDISON, OSRAM.
CCT		6500K ± 500 K
BATTERY TYPE		LITHIUM-ION RECHARGEABLE BATTERY.
DURATION		180 MINUTES BACK UP; $\pm 10\%$.
CHARGING TYPE		CONSTANT CURRENT CHARGER.
RECHARGING CYCLE		16 TO 24 HRS RECHARGING PERIOD.
MOUNTING		RECESSED MOUNTED BOTTOM OPENING 600 X 600MM.
WEIGHT (KG)		9 KG. APPROX.
INDICATION		RED LED "ON" INDICATES CHARGING.
APPLICATION		OFFICE AREA.

Tolerance on overall dimensions is ± 5 mm unless otherwise specified. | Please Note: Other Input Voltage Is Also Available – Price On Request (POR). | Due to continuous development, specifications may change without prior notice.

TDS NO-AMNS SITE